

Coilcraft®



MAGNETICS
FOR RF, POWER,
FILTER AND DATA
APPLICATIONS

www.coilcraft.com

OCTOBER, 2023

Contents

RF MAGNETICS	Through-Hole Inductors.....45
Chip Inductors.....3	Dual Inductors for Class-D.....47
Air Core Inductors.....14	Surface Mount Coupled Inductors.....48
Conical and Broadband.....16	Surface Mount Dual Inductors.....47
DOCSIS 3.x.....13	COMMON MODE EMI/RFI FILTERS
RFID Transponder Coils.....17	Data Line EMI Chokes.....49
Wideband RF Transformers.....18	High-Speed Data Line EMI Chokes.....50
POWER MAGNETICS	Surface Mount Power Line Common Mode EMI Chokes.....51
Shielded Molded Power Inductors.....20	Through-Hole Power Line Common Mode EMI Chokes.....52
Shielded Ferrite Core Power Inductors.....28	Wirewound Ferrite Beads.....54
Shielded Hi-Current Flat-Wire Power Inductors.....35	DESIGNER'S KITS55
Unshielded Surface Mount Inductors.....40	


Part Number Index

New Products in Bold

016008C3	AGM222237	LPS5030.....31	SLC1480.....39
0201AF.....3	AGP2923.....37	LPS505031	SLC7530.....38
0201CT4	AGP4233.....37	LPS6225.....31	SLC7649.....38
0201DS.....3	BxxT.....14	LPS6235.....31	SLR404038
0201HL.....3	BCL.....16	LPS8045B.....31	SLR1050.....39
026011C.....4	BCR.....16	M2022.....52	SLR1065.....39
026011F.....4	BU.....55	ME3215.....41	SLR1070.....39
0302CS.....4	BU9x.....55	ME3220.....41	SLR1075.....39
0402AF.....4	Buxx.....55	MLC12xx.....38	SLR1190.....39
0402CS.....6	CD1479.....54	MLC15xx.....38	SLR7010.....39
0402CT.....6	CD1480.....54	MLC1770.....38	SWB.....19
0402DC.....5	CE1755.....54	MLC75xx.....38	TA78xx.....13
0402DF.....6	CE1759.....54	MSC1278.....51	UA801x.....47
0402FL.....7	CE2439L.....54	MSD1038V50	UWB18
0402HL.....7	CF2638L.....54	MSD1048H50	VER2923.....37
0402HP/HPH.....6	CF2805.....54	MSD1278H50	WA309x.....15
0403HQ.....7	CF3094.....54	MSD1260H50	WB.....19
0603AF.....8	CG3333.....54	MSD1583.....51	WBC.....18
0603CS.....7	CG3528.....54	MSD1514.....51	WBT.....19
0603CT.....8	CG3885.....54	MSD734250	XAL1030.....27
0603DC8	CH4659.....54	MSS1038.....33	XAL1350.....27
0603HL.....10	CJ5094.....54	MSS1048.....33	XAL1510.....28
0603HP.....9	CJ5100.....52	MSS1210H.....34	XAL151328
0603LS.....9	CM1394.....53	MSS1246H.....33	XAL1580.....28
0603USB.....53	CM6518.....54	MSS1260H34	XAL7070.....27
0604HQ.....10	CMT.....56	MSS1278H.....34	XAL8080.....27
0805AF.....10	CQ7584.....52	MSS1583.....34	XAR7030.....28
0805CS.....10	CR7856.....52	MSS1812T33	XEL3515.....22
0805HP.....10	CR7915.....54	MSS512132	XEL3520.....22
0805HQ.....10	CV9172.....54	MSS5131H.....32	XEL3530.....22
0805HT.....11	Cx.....54	MSS6122.....32	XEL401x.....22
0805LS.....11	DFT453252	MSS6132.....32	XEL4020.....23
0805PB58	DFT1760.....52	MSS7331.....32	XEL4030.....23
0805RB58	DO1605T.....40	MSS7341.....33	XEL5020.....23
0805USB.....53	DO1606T.....40	MSS7348.....33	XEL5030.....23
0805USBF.....53	DO1607B.....43	PA669x.....13	XEL5050.....23
0805USBN.....53	DO1608C.....42	PDLF.....52	XEL6030.....23
0806SQ.....14	DO1813H.....43	PDMC54	XEL6060.....23
0807SQ.....14	DO3308P.....42	PDF3215.....48	XFL501x.....22
0906.....14	DO3314.....40	PDF2015.....48	XFL2005.....21
0908SQ.....14	DO3316H.....43	PFL1005.....20	XFL2006.....21
1008AF.....12	DO3316P.....42	PFL1609.....20	XFL201021
1008CS.....11	DO3316T.....42	PFL2010.....20	XFL3010.....22
1008CT.....12	DO3340H.....43	PFL2015.....20	XFL3012.....22
1008HQ.....12	DO3340P.....43	PFL2510.....20	XFL4012.....22
1008HT.....12	DO5010H.....44	PFL2512.....20	XFL4015.....22
1008LS.....12	DO5022P.....44	PFL3215.....20	XFL4020.....22
1010VS.....15	DO5040H.....44	PFL4514.....20	XFL4030.....22
1111SQ.....14	DOCIS 3.x.....13	PFL4517.....20	XFL501x.....22
1205POC16	EPL2010.....21	PTRF.....52	XFL5030.....22
1206CS.....12	EPL2014.....21	PWB.....18	XFL6012.....22
1206USB.....53	EPL3010.....21	RA6870.....53	XFL7015.....22
1210CAN52	EPL3012.....21	RA7231.....47	XGL101027
1210POC16	EPL3015.....21	RFB0807.....45	XGL106026
1212VS.....15	GA309x.....15	RFB0810.....45	XGL131327
132.....15	GA3416.....47	RFB1010.....45	XGL171227
1508.....14	HA403x.....13	RFC0807B.....45	XGL301424
1512SP15	HA4158.....47	RFC0807BV45	XGL351224
1515SQ.....14	JA4575.....47	RFC0810B.....46	XGL351524
1606.....14	LPD3015.....48	RFC1010B.....46	XGL352024
1812CAN.....52	LPD5010.....48	RFS1113.....47	XGL353024
1812CS.....13	LPD3015.....48	RFS1317.....46	XGL401224
1812FS.....13	LPD4012.....48	RFS1412.....47	XGL401524
1812LS.....13	LPD5030V.....49	SBU9.....51	XGL401824
1812SMS.....14	LPD6235.....49	SD43.....41	XGL4020.....25
1812WBT.....19	LPH8045.....51	SD54.....41	XGL402525
2014VS.....15	LPS3008/LPZ.....28	SER14xx.....35	XGL403025
2208NF17	LPS3010/LPZ.....28	SER80xx.....35	XGL404025
2222SQ.....14	LPS3015/LPZ.....29	SER1052.....35	XGL502025
2508.....14	LPS303029	SER1360.....35	XGL503026
2712SP15	LPS3314/LPZ.....29	SER1390.....35	XGL505026
2929SQ.....14	LPS401029	SER1512.....35	XGL602026
4308RV.....17	LPS4012/LPZ.....29	SER1590.....36	XGL603026
4310LC.....16	LPS4018/LPZ.....30	SER2000.....36	XGL606026
4312RV.....17	LPS404030	SER2211.....36	YG924547
4513TC.....17	LPS4414/LPZ.....30	SER2900.....36	ZA933647
5315TC.....17	LPS5010/LPZ.....30	SLC1049.....39	
AxxT.....14	LPS5015/LPZ.....30	SLC1175.....39	


Featured Products

XGL FAMILY ULTRA-LOW LOSS POWER INDUCTORS..... 24




- The industry's lowest DCR and ultra-low AC losses across a wide frequency range
- Available in a variety of sizes with inductance values from 42 nH to 56 μH
- Current ratings up to 117 A with soft saturation characteristics

O201CT SERIES LOW-PROFILE CERAMIC CHIP INDUCTORS..... 4



- Measures just 0.58 x 0.46 x 0.35 mm
- Excellent Q compared to non-wirewound alternatives
- Very high SRF – as high as 35.2 GHz
- Ideal for high-frequency applications, such as cell phones, wearable devices, and LTE/5G IoT networks

LPS4010 SERIES LOW-PROFILE POWER INDUCTORS..... 29



- Current ratings up to 4.5 A with very low DCR
- 24 inductance values from 0.38 to 220 μH
- 4.0 x 4.0 mm footprint and only 1.0 mm tall!
- Magnetic shielding allows high-density mounting

MAGPro™ Design Tools



Coilcraft's **MAGPro** suite of online inductor analysis tools are designed to enable inductor selection and circuit optimization based on sound engineering principles and measured data.

Reduce your design cycle time with confidence at... www.coilcraft.com/tools

AEC-Q200 qualified products are identified throughout the catalog with icons.



For additional information, please contact us for our **Magnetics for automotive electronics** brochure.





Air Core Inductors

S-parameters & T-Line models ON OUR WEB SITE

These tight tolerance surface mount air core inductors combine the exceptionally high Q of an air wound coil with the convenience of surface mounting. Their flat top makes them suitable for automatic placement and reflow or vapor phase processing. Solder coated leads ensure reliable soldering. The **Square Air Core Inductors** are available in seven sizes and offer Q factors up to 230 and current handling as high as 5.7 Amps. The **GA309x** Inductors have high current ratings and low DCR. The **VS Series** have the highest current ratings and the lowest DCR. These inductors are the perfect solution for high-current IF/RF applications that require non-magnetic parts.

Small Square Inductors

Part number	Inductance ±5% (nH)	Percent tolerance*	Q typ	Test freq (MHz)	SRF typ (GHz)	DCR max (mOhms)	I _{rms} (A)
0806SQ-5N5_LC	5.5	5.2	60	400	4.9	3.4	2.9
0806SQ-6N0_LC	6.0	5.2	64	400	5.2	6.0	2.9
0806SQ-8N9_LC	8.9	5.2	90	400	4.3	7.0	2.9
0806SQ-12N_LC	12.3	5.2	90	400	4.8	8.0	2.9
0806SQ-16N_LC	15.7	5.2	90	400	4.4	9.0	2.9
0806SQ-19N_LC	19.4	5.2	90	400	4.0	10.0	2.9
0807SQ-6N9_LC	6.9	5.2	100	400	4.6	6.0	2.7
0807SQ-10N_LC	10.2	5.2	100	400	4.0	7.0	2.7
0807SQ-11N_LC	11.2	5.2	90	400	3.6	6.3	2.7
0807SQ-14N_LC	13.7	5.2	100	400	4.3	8.0	2.7
0807SQ-17N_LC	17.0	5.2	100	400	4.0	9.0	2.7
0807SQ-22N_LC	22.0	5.2	100	400	3.5	10.0	2.7
0908SQ-8N1_LC	8.1	5.2	130	400	5.2	6.0	4.4
0908SQ-12N_LC	12.1	5.2	130	400	4.3	7.0	4.4
0908SQ-14N_LC	14.7	5.2	90	400	3.0	7.2	4.4
0908SQ-17N_LC	16.6	5.2	130	400	3.4	8.0	4.4
0908SQ-22N_LC	21.5	5.2	130	400	3.7	9.0	4.4
0908SQ-23N_LC	23.0	5.2	120	400	2.6	10.0	4.4
0908SQ-25N_LC	25.0	5.2	130	400	2.5	10.0	4.4
0908SQ-27N_LC	27.3	5.2	130	400	3.2	10.0	4.4

Square Inductors

Part number	Inductance ±5% (nH)	Percent tolerance*	Q typ	Test freq (MHz)	SRF typ (GHz)	DCR max (mOhms)	I _{rms} (A)
1111SQ-27N_EC	27	5.2	200	400	2.60	8.1	5.5
1111SQ-30N_EC	30	5.2	200	400	2.40	8.3	5.5
1111SQ-33N_EC	33	5.2	200	400	2.30	9.5	4.8
1111SQ-36N_EC	36	5.2	200	400	2.30	9.8	4.8
1111SQ-39N_EC	39	5.2	200	400	2.20	10.0	4.8
1111SQ-43N_EC	43	5.2	200	400	2.20	10.8	4.4
1111SQ-47N_EC	47	5.2	200	400	2.20	11.3	4.4
1515SQ-47N_EC	47	5.2	230	400	1.87	6.35	4.9
1515SQ-68N_EC	68	5.2	230	400	2.13	8.60	5.5
1515SQ-82N_EC	82	5.2	230	400	1.79	9.40	5.6
2222SQ-90N_EC	90	5.2	140	50	1.15	5.50	5.0
2222SQ-111_EC	110	5.2	140	50	1.00	6.50	5.7
2222SQ-131_EC	130	5.2	140	50	1.00	7.50	5.4
2222SQ-161_EC	160	5.2	140	50	1.00	8.25	5.7
2222SQ-181_EC	180	5.2	140	50	1.10	9.50	5.0
2222SQ-221_EC	220	5.2	140	50	1.00	11.0	5.0
2222SQ-271_EC	270	5.2	140	50	0.800	12.5	4.3
2222SQ-301_EC	300	5.2	150	50	0.720	13.8	3.7
2929SQ-331_EC	330	5.2	180	50	0.660	12.5	4.7
2929SQ-361_EC	360	5.2	180	50	0.620	13.5	4.5
2929SQ-391_EC	390	5.2	180	50	0.590	14.5	4.4
2929SQ-431_EC	430	5.2	180	50	0.550	15.5	4.2
2929SQ-501_EC	500	5.2	150	50	0.485	16.5	4.3



Micro

Part number	Turns	L (nH)	Percent tolerance*	Q min	Test freq (MHz)	SRF min (GHz)	DCR max (mOhms)	I _{rms} (A)
0906-2_LC	2	1.65	10,5,2	100	800	10.0	4.0	1.6
0906-3_LC	3	2.55	5,2,1	100	800	8.2	5.0	1.6
0906-4_LC	4	3.85	5,2,1	100	800	7.5	6.0	1.6
0906-5_LC	5	5.40	5,2,1	100	800	7.0	8.0	1.6
1606-6_LC	6	5.60	5,2,1	100	800	6.5	9.0	1.6
1606-7_LC	7	7.15	5,2,1	100	800	6.0	10	1.6
1606-8_LC	8	8.80	5,2,1	100	800	6.0	12	1.6
1606-9_LC	9	9.85	5,2,1	100	800	5.2	13	1.6
1606-10_LC	10	12.55	5,2,1	100	800	4.6	14	1.6



AxxT, BxxT

Part number	Turns	L (nH)	Percent tolerance*	Q min	Test freq (MHz)	SRF min (GHz)	DCR max (mOhms)	I _{rms} (A)
A01TKLC	1	2.5	10	145	150	12.5	11	4.0
A02T_LC	2	5.0	5,2,1	140	150	6.5	1.8	4.0
A03T_LC	3	8.0	5,2,1	140	150	5.0	2.6	4.0
A04T_LC	4	12.5	5,2,1	137	150	3.3	3.4	4.0
A05T_LC	5	18.5	5,2,1	132	150	2.5	3.9	4.0
B06T_LC	6	17.5	5,2,1	100	150	2.2	4.5	4.0
B07T_LC	7	22.0	5,2,1	102	150	2.1	5.2	4.0
B08T_LC	8	28.0	5,2,1	105	150	1.8	6.0	4.0
B09T_LC	9	35.5	5,2,1	112	150	1.5	6.8	4.0
B10T_LC	10	43.0	5,2,1	106	150	1.2	7.9	4.0



Low Profile Mini

Part number	Turns	L (nH)	Percent tolerance*	Q min	Test freq (MHz)	SRF min (GHz)	DCR max (mOhms)	I _{rms} (A)
1508-5N5_LC	3	5.5	5.2	115	250	5.0	2.6	4.0
1508-9N0_LC	4	9.0	5.2	120	250	4.0	3.4	4.0
1508-13N_LC	5	13.0	5.2	100	250	3.0	3.9	4.0
2508-16N_LC	7	16.0	5.2	110	250	3.0	5.2	4.0
2508-18N_LC	8	18.0	5.2	110	250	2.9	6.0	4.0
2508-23N_LC	9	23.0	5.2	110	250	2.6	6.8	4.0
2508-27N_LC	10	27.0	5.2	110	250	2.3	7.9	4.0



Midi

Part number	L (nH)	Percent tolerance*	Q typ	Q min	Test freq (MHz)	SRF min (GHz)	DCR max (mOhms)	I _{rms} (A)
1812SMS-22N_LC	22	5.2	135	100	150	3.2	4.2	3.0
1812SMS-27N_LC	27	5.2	135	100	150	2.7	4.0	3.5
1812SMS-33N_LC	33	5.2	130	100	150	2.5	4.8	3.0
1812SMS-39N_LC	39	5.2	135	100	150	2.1	4.4	3.0
1812SMS-47N_LC	47	5.2	135	100	150	2.1	5.6	3.0
1812SMS-56N_LC	56	5.2	125	100	150	1.5	6.2	3.0
1812SMS-68N_LC	68	5.2	120	100	150	1.5	8.2	2.5
1812SMS-82N_LC	82	5.2	120	100	150	1.3	9.4	2.5
1812SMS-R10_LC	100	5.2	115	100	150	1.2	12.3	1.7
1812SMS-R12_LC	120	5.2	125	100	150	1.1	17.3	1.5
1812SMS-R15_LC	150	5.2	145	100	150	0.75	33.0	1.2





Conical and Broadband Inductors

Coilcraft BCR and BCL conical inductors offer a flat bandwidth with high impedance to 40 GHz, and are ideal for use in bias tees. The BCR has a full-length cap that fully protects the coil and provides a large surface for pick and place. The BCL has "flying leads" that allows adjustment of the mounting angle. The 4310LC has a flat bandwidth to 6 GHz, making it the perfect solution for lower bandwidth, high power applications.

BCL

Part number	Inductance ±5% (µH)	Bandwidth	DCRmax (Ohms)	Irms (A) 40°C Rise
BCL-221JL	0.22	10MHz-40GHz	0.10	120
BCL-531JL	0.53	10MHz-40GHz	0.15	106
BCL-122JL	1.20	10MHz-40GHz	1.05	0.270
BCL-162JL	1.65	10MHz-40GHz	0.60	0.490
BCL-232JL	2.35	10MHz-40GHz	1.61	0.270
BCL-272JL	2.75	10MHz-40GHz	0.40	0.675
BCL-632JL	6.35	10MHz-40GHz	0.92	0.480
BCL-652JL	6.50	10MHz-40GHz	0.70	0.650
BCL-802JL	8.00	10MHz-40GHz	3.39	0.230


BCR

Part number	Inductance ±5% (µH)	Bandwidth	DCRmax (Ohms)	Irms (A) 40°C Rise
BCR-221JLC	0.22	10MHz-40GHz	0.10	120
BCR-531JLC	0.53	10MHz-40GHz	0.15	106
BCR-122JLC	1.20	10MHz-40GHz	1.05	0.270
BCR-162JLC	1.65	10MHz-40GHz	0.60	0.490
BCR-232JLC	2.35	10MHz-40GHz	1.61	0.270
BCR-272JLC	2.75	10MHz-40GHz	0.40	0.675
BCR-632JLC	6.35	10MHz-40GHz	0.92	0.480
BCR-652JLC	6.50	10MHz-40GHz	0.70	0.650
BCR-802JLC	8.00	10MHz-40GHz	3.39	0.230


4310LC

Part number	Inductance ±10% (µH)	SRF (typ) (MHz)	Bandwidth	DCR(max) (mOhms)	Irms (A) 40°C Rise
4310LC-132KEC	130	235	10MHz-6GHz	151	4.2
4310LC-352KEC	350	188	10MHz-6GHz	49.0	3.1


BCL



BCR



4310LC



Dimensions (inches mm)

Series	A max	B max	C max
BCL-221	0.166 4.22	0.100 2.54	0.138 3.51
BCL-531	0.166 4.22	0.100 2.54	0.179 4.55
BCL-122	0.166 4.22	0.100 2.54	0.115 2.92
BCL-162	0.166 4.22	0.100 2.54	0.174 4.42
BCL-232	0.166 4.22	0.100 2.54	0.150 3.81
BCL-272	0.275 6.99	0.100 2.54	0.310 7.87
BCL-632	0.275 6.99	0.100 2.54	0.340 8.62
BCL-652	0.390 9.91	0.100 2.54	0.435 11.05
BCL-802	0.180 4.57	0.100 2.54	0.237 6.00

Dimensions (inches mm)

Series	A max	B max	C max
BCR-221	0.220 5.59	0.150 3.81	0.160 4.06
BCR-531	0.220 5.59	0.150 3.81	0.160 4.06
BCR-122	0.120 3.05	0.100 2.54	0.110 2.79
BCR-162	0.220 5.59	0.150 3.81	0.160 4.06
BCR-232	0.220 5.59	0.150 3.81	0.160 4.06
BCR-272	0.440 11.18	0.220 5.59	0.220 5.59
BCR-632	0.440 11.18	0.220 5.59	0.220 5.59
BCR-652	0.440 11.18	0.220 5.59	0.220 5.59
BCR-802	0.220 5.59	0.150 3.81	0.160 4.06
4310LC	0.460 11.68	0.220 4.90	0.140 3.554




1205POC



NEW!

Partnumber	Inductance ±20% (µH)	SRF typ (MHz)	DCR(Ohms) max	Isat (mA) at 125°C	Irms (mA) 25°C Rise
1205POC-682MRC	6.8	220	0.41	520	880
1205POC-103MRC	10.0	165	1.00	410	560

1205POC



Dimensions (inches mm)

Series	A max	B max	C max
1205POC	0.126 3.20	0.055 1.40	0.093 2.36




1210POC



NEW!

Partnumber	Inductance ±20% (µH)	SRF typ (MHz)	DCR(Ohms) max	Isat (mA) 125°C	Irms (mA) 25°C Rise
1210POC-222MRC	2.2	300	0.13	1500	1900
1210POC-472MRC	4.7	160	0.19	950	1500
1210POC-682MRC	6.8	120	0.24	800	1360
1210POC-103MRC	10	95	0.34	660	1130
1210POC-153MRC	15	81	0.51	580	900
1210POC-183MRC	18	79	0.84	510	850
1210POC-223MRC	22	70	0.88	450	700

1210POC



Dimensions (inches mm)

Series	A max	B max	C max
1210POC	0.13 3.30	0.105 2.67	0.118 3.00





SM RFID Transponder Coils

These Coilcraft transponder coils are designed for RFID applications at 125 kHz. The 4312RV and 5315TC were designed to withstand harsh mechanical shock and are well suited for use in tire pressure monitoring systems.



4308RV

Partnumber	Inductance at 125kHz (mH)	Percent tol*	Q min	Read distance (inches/cm)	Sensitivity (mV/μT)	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
4308RV-374X_LD	0.37	5.2	26	22/55.9	9.82	4380	6.5	1800
4308RV-404X_LD	0.40	5.2	26	23/58.4	10.38	4050	7.1	5000
4308RV-704X_LD	0.70	5.2	20	25/63.5	13.96	2320	19	6600
4308RV-904X_LD	0.90	5.2	22	26/66.0	16.06	1800	21	4800
4308RV-115X_LD	1.08	5.2	24	30/76.2	17.78	1500	24	4300
4308RV-205X_LD	1.97	5.2	28	34/86.4	24.90	823	31	1750
4308RV-245X_LD	2.38	5.2	30	37/94.0	28.21	681	34	1700
4308RV-295X_LD	2.89	5.2	30	37/94.0	32.12	561	42	1900
4308RV-335X_LD	3.30	5.2	30	38/96.5	34.96	491	48	1425
4308RV-415X_LD	4.15	5.2	27	39/99.1	41.35	391	70	1620
4308RV-495X_LD	4.90	5.2	26	38/96.5	47.17	331	93	1150
4308RV-685X_LD	6.80	5.2	28	41/104.1	61.71	238	110	1080
4308RV-715X_LD	7.10	5.2	27	42/106.7	65.60	228	114	1050
4308RV-725X_LD	7.20	5.2	28	40/101.6	66.67	225	114	965
4308RV-815X_LD	8.10	5.2	28	42/106.7	75.08	200	125	965
4308RV-905X_LD	9.00	5.2	30	40/101.6	84.64	180	125	725

* Bold numbers indicate tolerances carried in stock. When ordering, please replace underscore in part number with the proper tolerance code: G = 2%, J = 5%, (e.g. 4308RV-905XGDL for a 2% tolerance part).



4513TC High Sensitivity

Partnumber	Inductance at 125kHz (mH)	Percent tol	Q min	Read distance (inches/cm)	Sensitivity (mV/μT)	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
4513TC-404XGLD	0.40	2	29	23.90/60.71	11.76	4050	9.66	5890
4513TC-105XGLD	1.00	2	33	30.95/78.61	19.80	1621	20.6	3670
4513TC-245XGLD	2.38	2	40	36.75/93.35	32.80	681	39.0	2200
4513TC-495XGLD	4.90	2	44	38.55/97.92	54.76	331	55.8	1551
4513TC-725XGLD	7.20	2	51	44.10/112.01	76.97	225	91.0	1400



5315TC Rugged


Partnumber	Inductance at 125kHz (mH)	Percent tol	Q min	Read distance (inches/cm)	Sensitivity (mV/μT)	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
5315TC-374XGLD	0.37	2	8	16/40.6	8.32	4380	24	7100
5315TC-404XGLD	0.40	2	8	17/43.2	8.67	4050	25	7300
5315TC-704XGLD	0.70	2	12	21/53.3	11.43	2320	33	4500
5315TC-904XGLD	0.90	2	12	21/53.3	13.35	1800	38	3800
5315TC-105XGLD	1.00	2	12	23/58.4	14.07	1600	40	2500
5315TC-115XGLD	1.08	2	13	23/58.4	14.65	1500	40	2300
5315TC-205XGLD	1.97	2	14	25/63.5	21.28	820	70	2300
5315TC-245XGLD	2.38	2	12	26/66.0	23.97	680	80	2400
5315TC-335XGLD	3.30	2	14	27/68.6	29.70	490	95	1800
5315TC-415XGLD	4.15	2	15	29/73.7	34.95	390	103	1260
5315TC-495XGLD	4.90	2	15	28/71.1	40.00	330	150	1550
5315TC-685XGLD	6.80	2	13	30/76.2	53.87	240	180	1350
5315TC-715XGLD	7.10	2	14	30/76.2	55.41	220	176	890
5315TC-725XGLD	7.20	2	17	30/76.2	56.74	220	165	880



4312RV Rugged


Partnumber	Inductance at 125kHz (mH)	Percent tol	Q min	Read distance (inches/cm)	Sensitivity (mV/μT)	Matching capacitor (pF)	DCR max (Ohms)	SRF typ (kHz)
4312RV-404XGLD	0.40	2	21	19.65/49.91	9.14	4050	11.5	6340
4312RV-105XGLD	1.00	2	21	24.25/61.60	15.26	1621	29	4150
4312RV-245XGLD	2.38	2	26	28.35/72.01	24.72	681	55	2470
4312RV-495XGLD	4.90	2	24	32.85/83.44	42.45	331	103	1270
4312RV-725XGLD	7.20	2	30	35.05/89.03	60.02	225	128	1465
4312RV-905XGLD	9.00	2	32	35.80/91.00	78.10	180	150	1200

4308RV, 4312RV, 4513TC, 5315TC

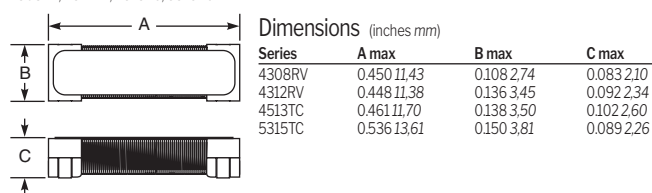

2208NF NFMI Antenna Coil **NEW!**

Partnumber	Inductance ±5% (μH)	Q _{typ} @ 10.579MHz	SRF _{typ} (MHz)	DCR _{max} (mOhms)	I _{rms} (mA) 15°C Rise
2208NF-372XJRC	3.7	80	200	710	410
2208NF-392XJRC	3.9	80	195	740	405



Series	A max	B max	C max
2208NF	0.234 5.95	0.098 2.48	0.087 2.20




SM Wideband RF Transformers

PWB




Type	Part number	Imp ratio	Bandwidth (MHz)	I _{rms} (mA)	Insertion loss (dB)	Pins 1-3		Pins 6-4	
						L min (μH)	DCR max (Ohms)	L min (μH)	DCR max (Ohms)
A	PWB-1-ALD	1:1	0.080 - 450	250	0.60	40	0.070	40	0.070
A	PWB-15-ALD	11.5	0.030 - 300	250	0.35	110	0.080	160	0.110
A	PWB-2-ALD	1:2	0.050 - 200	250	0.25	75	0.088	150	0.120
A	PWB-4-ALD	1:4	0.150 - 500	250	0.50	25	0.075	98	0.135
A	PWB-16-ALD	1:16	0.050 - 80	250	0.35	75	0.260	1250	0.910
A	PWB1010LD	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
A	PWB1010-1LD	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
A	PWB1015LD	11.5	0.07 - 225	250	0.40	51	0.130	80	0.145
A	PWB1040LD	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160
B	PWB-1-BLD	1:1	0.130 - 425	250	0.40	22	0.070	22	0.070
B	PWB-15-BLD	11.5	0.500 - 250	250	0.40	140	0.100	200	0.120
B	PWB-2-BLD	1:2	0.200 - 400	250	0.35	75	0.088	150	0.130
B	PWB-4-BLD	1:4	0.140 - 700	250	0.50	25	0.075	98	0.135
B	PWB-16-BLD	1:16	0.075 - 90	250	0.30	75	0.260	1250	0.910
B	PWB2010LD	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
B	PWB2010-1LD	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
B	PWB2040LD	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160
C	PWB-1-CLD	1:1	0.100 - 300	250	0.60	22	0.070	22	0.070
C	PWB-15-CLD	11.5	0.150 - 200	250	0.30	140	0.110	200	0.120
C	PWB-2-CLD	1:2	0.130 - 285	250	0.30	75	0.105	150	0.130
C	PWB-4-CLD	1:4	0.140 - 500	250	0.50	25	0.075	98	0.135
C	PWB3010LD	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
C	PWB3010-1LD	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
C	PWB3015LD	11.5	0.07 - 225	250	0.40	51	0.130	80	0.145
C	PWB3040LD	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160



Dimensions (inches mm)


A	B	C	D	E	F
0.256 6,48	0.283 7,2	0.175 4,45	0.04 1,00	0.10 2,54	0.02 0,5

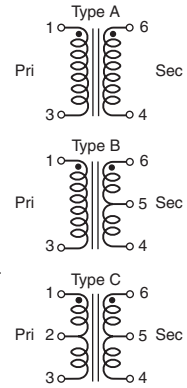

WBC




Type	Part number	Imp ratio	Bandwidth (MHz)	Insertion loss max (dB)	Pins 4-6		Pins 1-3	
					L min (μH)	DCR max (mOhms)	L min (μH)	DCR max (mOhms)
A	WBC1-1LC	1:1	0.400 - 600	0.40	10	120	10	120
B	WBC1-1TLC	1:1	0.250 - 750	0.58	9.5	75	9.5	75
B	WBC2-1TLC	1:2	0.200 - 500	0.50	10	120	20	150
B	WBC3-1TLC	1:3	0.300 - 900	0.60	9	100	27	150
B	WBC4-1TLC	1:4	0.250 - 750	1.0	9	55	36	120
B	WBC4-14LC	1:4	1.500 - 1200	2.0	2	50	8	100
B	WBC4-1WLC	1:4	0.500 - 1000	0.90	5	80	20	120
B	WBC4-6TLC	1:4	0.300 - 700	0.65	9	80	36	200
D	WBC8-1LC	1:8	0.150 - 600	0.60	22	120	176	310
B	WBC9-1LC	1:9	0.300 - 500	0.54	9	80	81	230
B	WBC16-1TLC	1:16	0.600 - 300	0.80	5	80	80	230
C	WBC4-4LC	1:4	0.250 - 800	1.0	9	60	36	120



Dimensions (inches mm)


A max	B max	C max
0.175 4,45	0.165 4,19	0.120 3,05



UWB



Part number	Impedance ratio pri:sec	Insertion Bandwidth (MHz)	loss max (dB)	L min (μH)	DCR max (mOhm)
UWB1-85E	1:1	1 - 8500	150	3.6	45
UWB2-50E	1:2	0.5 - 5000	150	7.5	71
UWB4-45E	1:4	0.5 - 4500	130	7.5	71



Dimensions (inches mm)

	A	B	C	D
UWB1	0.160 4,06	0.125 3,175	0.125 3,175	0.015 0,381
UWB2	0.160 4,06	0.125 3,175	0.125 3,175	0.015 0,381
UWB4	0.160 4,06	0.125 3,175	0.125 3,175	0.015 0,381






SM/TH Wideband RF Transformers

1812WBT



Part number	Imp ratio	Bandwidth (MHz)	Irms (mA)	Insertion loss (dB)	L/winding (μ H)	Test freq (MHz)	DCR max (Ohms)	Isolation (Vrms)
1812WBT-1LC	1:1	0.340-22	200	<1	14	10	4.8	50
1812WBT-2LC	1:1	0.800-60	400	<1	5.3	10	1.8	50
1812WBT-3LC	1:1	4-200	500	<1	1.25	50	0.7	50
1812WBT-4LC	1:1	11-480	700	<1	0.22	50	0.3	50
1812WBT-5LC	1:1	48-645	700	<1.5	0.09	50	0.15	50
1812WBT15-1LC	1.5:1	1.3-100	400	0.5	5.0/3.3	10	1.05/0.87	50
1812WBT15-2LC	1.5:1	2.75-135	500	0.5	2.5/1.6	10	0.74/0.58	50
1812WBT15-3LC	1.5:1	7.2-200	500	0.75	1.0/0.6	10	0.43/0.34	50
1812WBT15-4LC	1.5:1	38-535	700	2.25	0.144/0.090	10	0.18/0.14	50
1812WBT2-1LC	2:1	0.800-23	200	<1.5	13.80/6.90	10	4.6/3.2	50
1812WBT2-2LC	2:1	2.2-65	400	<1.5	5.850/2.925	10	1.25/0.95	50
1812WBT2-3LC	2:1	4-105	600	<1.5	2.60/1.30	10	0.52/0.42	50
1812WBT2-4LC	2:1	11-200	700	<1.5	0.910/455	50	0.27/0.23	50








Dimensions (inches mm)

A max	B max	C max	D	E	F
0.195/4.95	0.150/3.81	0.135/3.43	0.030/0.76	0.040/1.02	0.070/1.78

WB, WBT



Type	SM part number	TH part number	Imp ratio	Bandwidth (MHz)	Pins 4-6		Pins 1-3	
					L min (μ H)	DCR max (mOhms)	L min (μ H)	DCR max (mOhms)
A	WB1-1SLD	WB1-1L	1:1	0.150-500	27	75	27	75
A	WB1-6SLD	WB1-6L	1:1	0.100-350	25	100	25	100
A	WB118-3SLD	WB118-3L	1:118	0.040-300	90	300	108	330
A	WB15-6SLD	WB15-6L	1:1.5	0.050-325	56	120	84	150
A	WB2-1-2WSLD	WB2-1-2WL	1:2	0.080-700	38	100	75	150
A	WB25-6SLD	WB25-6L	1:2.5	0.080-225	30	100	75	130
A	WB4-6SLD	WB4-6L	1:4	0.100-125	25	100	100	200
A	WB9-1SLD	WB9-1L	1:9	0.125-125	25	100	225	250
A	WB16-1SLD	WB16-1L	1:16	0.050-100	56	75	896	330
A	WB36-1SLD	WB36-1L	1:36	0.100-45	25	50	900	180
B	WB1-1TSLD	WB1-1TL	1:1	0.100-375	25	100	25	100
B	WB1-6TSLD	WB1-6TL	1:1	0.050-200	70	150	70	150
B	WB2-1TSLD	WB2-1TL	1:2	0.070-400	38	100	75	150
B	WB25-6TSLD	WB25-6TL	1:2.5	0.050-125	56	120	140	200
B	WB3-1TSLD	WB3-1TL	1:3	0.040-500	96	110	270	200
B	WB4-1HSLD	WB4-1HL	1:4	0.100-500	25	120	100	160
B	WB4-6TSLD	WB4-6TL	1:4	0.050-200	43	120	172	160
B	WB5-1TSLD	WB5-1TL	1:5	0.050-400	48	220	240	500
B	WB8-1TSLD	WB8-1TL	1:8	0.150-400	18	100	144	270
B	WB13-1TSLD	WB13-1TL	1:13	0.150-125	17	90	221	200
B	WB16-6TSLD	WB16-6TL	1:16	0.050-100	56	75	896	330
C	WBT1-6SLD	WBT1-6L	1:1	0.040-200	70	150	70	150
C	WBT15-1SLD	WBT15-1L	1:1.5	0.040-350	48	150	70	180
C	WBT25-6SLD	WBT25-6L	1:2.5	0.050-100	70	150	175	200
C	WBT4-1SLD	WBT4-1L	1:3	0.040-150	45	120	135	160
C	WBT4-1ASLD	WBT4-1AL	1:4	0.040-350	96	110	384	220
C	WBT16-1SLD	WBT16-1L	1:16	0.100-100	25	100	400	300
C	WBT25-1SLD	WBT25-1L	1:2.5	0.100-65	25	100	625	350








Dimensions (inches mm)

Series	A max	B max	C max	D ref	E	F	G max
SM	0.325/8.26	0.285/7.24	0.225/5.72	0.400/10.16	0.520/13.2	0.10/2.5	0.025/0.64
TH	0.325/8.26	0.285/7.24	0.225/5.72	0.300/7.62		0.10/2.5	

SWB



Type	SM part number	TH part number	Imp ratio	Bandwidth (MHz)	Pins 1-3		Pins 6-4	
					L min (μ H)	DCR max (mOhms)	L min (μ H)	DCR max (mOhms)
A	SWB1010-SMLD	SWB1010-PCL	1:1	0.005-100	780	320	780	320
A	SWB1010-1-SMLD	SWB1010-1-PCL	1:1	0.040-175	95	200	95	200
A	SWB1015-SMLD	SWB1015-PCL	1.5:1	0.100-150	80	145	51	130
A	SWB1040-SMLD	SWB1040-PCL	4:1	0.200-300	95	160	25	115
B	SWB2010-SMLD	SWB2010-PCL	1:1	0.005-100	780	320	780	320
B	SWB2010-1-SMLD	SWB2010-1-PCL	1:1	0.040-175	95	200	95	200
B	SWB2040-SMLD	SWB2040-PCL	4:1	0.200-300	95	160	25	115
C	SWB3010-SMLD	SWB3010-PCL	1:1	0.005-100	780	320	780	320
C	SWB3010-1-SMLD	SWB3010-1-PCL	1:1	0.040-175	95	200	95	200
C	SWB3015-SMLD	SWB3015-PCL	1.5:1	0.100-150	80	145	51	130
C	SWB3040-SMLD	SWB3040-PCL	4:1	0.200-300	95	160	25	115



Dimensions (inches mm)

Series	A max	B max	C max	D ref	E	F	G max
SM	0.325/8.26	0.285/7.24	0.225/5.72	0.400/10.16	0.520/13.2	0.10/2.5	0.025/0.64
TH	0.325/8.26	0.285/7.24	0.225/5.72	0.300/7.62		0.10/2.5	



Shielded Molded Power Inductors

S-parameters & SPICE models ON OUR WEB SITE

Coilcraft high-performance, high-frequency molded power inductors offer high current handling, soft saturation, and high efficiency in compact sizes. They come in a wide range of inductance values from 0.018 to 220 µH across seven product families: XGL, XEL, XAL, XFL, XAR, EPL, and PFL. Our next-generation XGL Family offers our lowest DC losses and extremely low AC losses for a wide range of DC-DC converters, from hundreds of kHz up to 5+ MHz. Additional performance benefits include a wider range of inductance values and improved Irms current ratings.

0200 125 PFL1005

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

0200 125 PFL1609

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL2010

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL2015

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL2510

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL2512

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL3215


Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL4514

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.

PFL4517

Table with columns: Partnumber, Inductance ±20% (µH), DCR (Ohms) nom/max, SRF typ (MHz), Isat (A) 10% drop, 20% drop, 30% drop, Irms (A) 20°C rise, 40°C rise.



Dimensions (inches/mm)

Table with columns: Series, A max, B max, C max, D ref, E, F, G. Rows include PFL1005, PFL1609, PFL2010, PFL2015, PFL2510, PFL2512, PFL3215, PFL4514, PFL4517.



Q200
125°

XGL4020

Partnumber	Inductance ±20% (µH)	DCR(mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I _{rms} (A)	
		typ	max			20°C rise	40°C rise
XGL4020-420MEC	0.042	0.85	1.0	700.0	36.0	22.8	33.3
XGL4020-111MEC	0.11	1.4	1.7	250.0	29.0	20.5	29.0
XGL4020-251MEC	0.25	2.5	3.0	130.0	16.5	18.0	24.0
XGL4020-331MEC	0.33	3.0	3.6	110.0	15.2	16.5	23.0
XGL4020-471MEC	0.47	4.2	5.1	95.0	13.4	14.3	19.7
XGL4020-601MEC	0.60	5.1	5.9	80.0	11.7	13.5	18.4
XGL4020-821MEC	0.82	7.7	8.6	65.0	9.4	11.2	14.0
XGL4020-102MEC	1.0	8.2	9.0	60.0	8.8	8.8	12.0
XGL4020-152MEC	1.5	13.0	14.3	45.0	7.5	8.0	11.1
XGL4020-222MEC	2.2	19.5	21.5	40.0	6.2	6.7	8.9
XGL4020-332MEC	3.3	30.8	34.0	30.0	4.8	4.9	6.6
XGL4020-472MEC	4.7	43.0	47.3	23.0	4.1	4.1	5.6
XGL4020-562MEC	5.6	48.7	53.6	22.0	3.7	3.9	5.3
XGL4020-682MEC	6.8	63.6	70.0	21.0	3.4	3.1	4.2
XGL4020-822MEC	8.2	71.0	78.1	20.0	3.2	3.0	4.1

Which Molded Power Inductor is Right for You?

XAL	Widest range of sizes & high current
XFL	Low DCR & lowest profile
XEL	High current and low AC losses for high frequency
XGL (NEW!)	Lowest DCR, extremely low AC losses and widest inductance range

Q200
125°

XGL4025

Partnumber	Inductance ±20% (µH)	DCR(mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I _{rms} (A)	
		typ	max			20°C rise	40°C rise
XGL4025-131MEC	0.13	1.4	1.7	230	24.0	21.0	28.0
XGL4025-241MEC	0.24	2.0	2.4	145	18.2	18.0	24.2
XGL4025-331MEC	0.33	2.7	3.2	115	16.2	15.7	21.6
XGL4025-471MEC	0.47	3.7	4.5	100	13.5	13.2	17.8
XGL4025-561MEC	0.56	4.2	4.9	85	12.6	12.9	17.2
XGL4025-681MEC	0.68	5.2	6.3	77	11.0	12.0	16.4
XGL4025-821MEC	0.82	6.0	7.2	68	10.1	10.3	14.4
XGL4025-901MEC	0.90	6.2	7.4	63	9.6	10.0	13.7
XGL4025-102MEC	1.0	7.4	8.5	58	8.9	9.6	13.1
XGL4025-122MEC	1.2	8.7	10.0	53	8.2	8.6	11.3
XGL4025-152MEC	1.5	10.4	12.0	49	7.6	8.0	11.0
XGL4025-182MEC	1.8	12.6	14.5	48	6.8	7.2	9.7
XGL4025-222MEC	2.2	14.7	16.9	40	6.3	6.8	9.0
XGL4025-332MEC	3.3	24.0	27.0	32	4.9	5.1	6.9
XGL4025-472MEC	4.7	35.2	39.5	26	4.3	4.0	5.4
XGL4025-562MEC	5.6	43.4	47.9	25	3.8	3.7	5.1
XGL4025-682MEC	6.8	53.2	58.7	22	3.5	3.3	4.5
XGL4025-822MEC	8.2	68.9	76.0	21	3.3	2.9	4.0
XGL4025-103MEC	10	80.9	89.2	18	2.9	2.6	3.6
XGL4025-123MEC	12	95.5	105.3	17	2.6	2.4	3.3

Q200
125°


XGL4040

Partnumber	Inductance ±20% (µH)	DCR(mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I _{rms} (A)	
		typ	max			20°C rise	40°C rise
XGL4040-151MEC	0.15	1.5	1.8	190	21.0	22.3	30.2
XGL4040-301MEC	0.30	2.2	2.6	120	15.3	17.7	24.6
XGL4040-471MEC	0.47	2.8	3.2	90	12.2	15.1	20.8
XGL4040-681MEC	0.68	3.5	4.0	72	10.5	12.8	18.3
XGL4040-102MEC	1.00	4.8	5.6	55	9.3	10.2	14.8
XGL4040-152MEC	1.50	6.8	7.9	47	7.9	8.7	12.5
XGL4040-222MEC	2.20	10.1	11.5	37	6.4	8.0	11.0
XGL4040-332MEC	3.30	15.0	16.6	32	5.5	6.8	8.7
XGL4040-472MEC	4.70	22.2	24.5	24	4.4	5.3	7.1
XGL4040-682MEC	6.8	31.5	34.7	20	4.0	4.2	5.6
XGL4040-822MEC	8.2	37.4	41.2	18	3.3	4.1	5.4
XGL4040-103MEC	10	45.8	50.5	17	2.8	3.7	5.0
XGL4040-153MEC	15	74.5	82.2	12	2.5	2.7	3.6
XGL4040-223MEC	22	104.0	114.7	10	1.9	2.5	3.3

Q200
125°

XGL4030

Partnumber	Inductance ±20% (µH)	DCR(mOhms)		SRF typ (MHz)	Isat (A) 30% drop	I _{rms} (A)	
		typ	max			20°C rise	40°C rise
XGL4030-450MEC	0.045	0.67	0.8	680	42.5	25.0	36.0
XGL4030-131MEC	0.13	1.5	1.8	265	26.5	21.0	27.0
XGL4030-271MEC	0.27	2.2	2.4	160	19.3	17.5	24.2
XGL4030-301MEC	0.30	2.5	2.9	130	17.0	17.0	24.0
XGL4030-401MEC	0.40	2.8	3.2	120	15.5	15.5	22.5
XGL4030-471MEC	0.47	3.4	3.9	100	14.2	15.3	21.2
XGL4030-621MEC	0.62	4.1	4.6	82	12.7	12.5	15.0
XGL4030-761MEC	0.76	4.9	5.5	72	11.8	12.3	14.2
XGL4030-102MEC	1.0	6.5	7.2	65	10.3	10.8	13.0
XGL4030-122MEC	1.2	8.5	9.4	55	9.2	9.5	12.2
XGL4030-152MEC	1.5	9.5	10.5	50	8.8	7.0	10.2
XGL4030-222MEC	2.2	13.5	15.0	40	7.0	5.8	8.7
XGL4030-332MEC	3.3	19.9	21.9	30	5.3	5.4	7.5
XGL4030-472MEC	4.7	28.5	31.5	26	4.4	4.8	6.6
XGL4030-562MEC	5.6	31.5	34.7	25	4.2	4.0	5.5
XGL4030-682MEC	6.8	43.5	47.9	22	3.65	3.5	4.7
XGL4030-822MEC	8.2	50.6	55.7	20	3.45	3.1	4.2
XGL4030-103MEC	10.0	63.0	69.5	18.5	3.1	2.9	3.9
XGL4030-123MEC	12.0	78.5	86.5	17	2.7	2.5	3.4

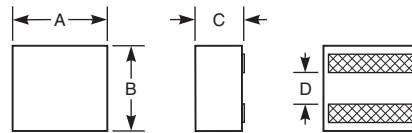


Dimensions (inches mm)

Series	A max	B max	C max	D
XGL3014	0.126 3.2	0.126 3.2	0.394 1.4	0.0521 33
XGL3512	0.144 3.65	0.132 3.35	0.047 1.2	0.045 1.4
XGL3515	0.144 3.65	0.132 3.35	0.059 1.5	0.045 1.4
XGL3520	0.144 3.65	0.132 3.35	0.079 2.0	0.045 1.4
XGL3530	0.144 3.65	0.132 3.35	0.118 3.0	0.045 1.4
XGL4012	0.169 4.3	0.169 4.3	0.047 1.2	0.062 1.57
XGL4015	0.169 4.3	0.169 4.3	0.059 1.5	0.062 1.57
XGL4018	0.169 4.3	0.169 4.3	0.071 1.8	0.062 1.57
XGL4020	0.169 4.3	0.169 4.3	0.083 2.1	0.062 1.57
XGL4025	0.169 4.3	0.169 4.3	0.098 2.5	0.062 1.57
XGL4030	0.169 4.3	0.169 4.3	0.122 3.1	0.062 1.57
XGL4040	0.169 4.3	0.161 4.3	0.161 4.1	0.062 1.57
XGL5020	0.224 5.5	0.216 5.3	0.083 2.1	0.091 2.31

Q200
85°

SER1590



Partnumber	Inductance ±20% (µH)	DCR(mOhms)		SRF typ (MHz)	Isat (A)			Irms(A)
		nom	max		10% drop	20% drop	30% drop	
SER1590-301MLD	0.30	0.66	0.72	260	53	56	57	32
SER1590-501MLD	0.50	0.87	0.94	202	39	42	44	27
SER1590-601MLD	0.60	0.87	0.94	182	33	35	36	27
SER1590-681MLD	0.68	0.87	0.94	160	30	32	33	27
SER1590-801MLD	0.80	0.87	0.94	123	25	26	27	27
SER1590-901MLD	0.90	1.08	1.15	160	27	28	29	22
SER1590-102MLD	1.0	0.87	0.94	115	20	22	23	27
SER1590-122MLD	1.2	1.08	1.15	90	20	22	23	22
SER1590-152MLD	1.5	1.08	1.15	73	17	18	19	22

Q200
85°


SER2000



Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A) 10% drop	Irms (A)	
		nom	max			20°C rise	40°C rise
SER2009-301MLD	0.30	0.740	0.630	550	100	41	54
SER2010-301MLD	0.30	1.00	0.900	182	100	36	45
SER2009-501MLD	0.50	0.740	0.630	544	60	41	54
SER2010-501MLD	0.50	1.00	0.900	148	81	36	45
SER2011-501MLD	0.50	1.34	1.20	161	100	30	40
SER2009-601MLD	0.60	0.740	0.630	648	49	41	54
SER2010-601MLD	0.60	1.00	0.900	115	70	36	45
SER2011-601MLD	0.60	1.34	1.20	124	90	30	40
SER2012-601MLD	0.60	1.60	1.44	115	97	25	35
SER2009-681MLD	0.68	0.740	0.630	454	45	41	54
SER2010-681MLD	0.68	1.00	0.900	136	62	36	45
SER2011-681MLD	0.68	1.34	1.20	135	78	30	40
SER2012-681MLD	0.68	1.60	1.44	103	85	25	35
SER2013-681MLD	0.68	1.82	1.70	104	98	23	30
SER2009-801MLD	0.80	0.740	0.630	567	38	41	54
SER2010-801MLD	0.80	1.00	0.900	92	53	36	45
SER2011-801MLD	0.80	1.34	1.20	113	70	30	40
SER2012-801MLD	0.80	1.60	1.44	91	75	25	35
SER2013-801MLD	0.80	1.82	1.70	93	85	23	30
SER2014-801MLD	0.80	2.15	1.94	104	98	21	27
SER2009-901MLD	0.90	0.740	0.630	557	33	41	54
SER2010-901MLD	0.90	1.00	0.900	96	48	36	45
SER2011-901MLD	0.90	1.34	1.20	104	62	30	40
SER2012-901MLD	0.90	1.60	1.44	85	69	25	35
SER2013-901MLD	0.90	1.82	1.70	98	73	23	30
SER2014-901MLD	0.90	2.15	1.94	102	87	21	27
SER2009-102MLD	1.0	0.740	0.630	488	29	41	54
SER2010-102MLD	1.0	1.00	0.900	81	42	36	45
SER2011-102MLD	1.0	1.34	1.20	97	56	30	40
SER2012-102MLD	1.0	1.60	1.44	75	64	25	35
SER2013-102MLD	1.0	1.82	1.70	98	68	23	30
SER2014-102MLD	1.0	2.15	1.94	88	70	21	27
SER2009-122MLD	1.2	0.740	0.630	81	28	41	54
SER2010-122MLD	1.2	1.00	0.900	69	37	36	45
SER2011-122MLD	1.2	1.34	1.20	81	49	30	40
SER2012-122MLD	1.2	1.60	1.44	73	54	25	35
SER2013-122MLD	1.2	1.82	1.70	82	58	23	30
SER2014-122MLD	1.2	2.15	1.94	78	63	21	27
SER2009-202MLD	2.0	0.740	0.630	40	16	41	54
SER2010-202MLD	2.0	1.00	0.900	48	27	36	45
SER2011-202MLD	2.0	1.34	1.20	56	37	30	40
SER2012-202MLD	2.0	1.60	1.44	51	35	25	35
SER2013-202MLD	2.0	1.82	1.70	61	40	23	30
SER2014-202MLD	2.0	2.15	1.94	62	45	21	27
SER2013-362MLD	3.6	1.82	1.70	38	25	23	30
SER2013-402MLD	4.0	1.82	1.70	35	20	23	30
SER2014-402MLD	4.0	2.15	1.94	36	25	21	27
SER2013-472MLD	4.7	1.82	1.70	30	18	23	30

Q200
85°


SER2900



Partnumber	Inductance ±10% (µH)	DCR(mOhms)		SRF typ (MHz)	Isat(A)			Irms(A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
SER2915L-152KL	1.5	1.50	1.65	60	100	>100	>100	20	30
SER2915H-222KL	2.2	1.86	2.05	40	100	>100	>100	20	30
SER2915L-222KL	2.2	1.50	1.65	50	82.0	84.0	84.8	20	30
SER2918H-332KL	3.3	2.60	2.86	40	91.0	92.5	93.6	20	28
SER2915H-332KL	3.3	1.86	2.05	30	62.0	66.9	68.4	20	30
SER2915L-332KL	3.3	1.50	1.65	40	48.0	54.0	57.0	20	30
SER2918H-472KL	4.7	2.60	2.86	30	59.0	61.2	62.4	20	28
SER2915H-472KL	4.7	1.86	2.05	25	42.0	48.0	50.1	20	30
SER2915L-472KL	4.7	1.50	1.65	30	33.0	36.9	39.0	20	30
SER2918H-682KL	6.8	2.60	2.86	25	42.0	45.0	45.9	20	28
SER2915H-682KL	6.8	1.86	2.05	20	30.0	34.5	36.2	20	30
SER2915L-682KL	6.8	1.50	1.65	25	22.0	26.0	27.8	20	30
SER2918H-103KL	10	2.60	2.86	20	28.0	31.2	32.1	20	28
SER2915H-103KL	10	1.86	2.05	15	18.0	21.5	23.4	20	30
SER2915L-103KL	10	1.50	1.65	20	13.0	16.2	17.6	20	30
SER2918H-153KL	15	2.60	2.86	16	18.0	21.2	21.9	20	28
SER2915H-153KL	15	1.86	2.05	12	11.5	14.0	15.2	20	30
SER2915L-153KL	15	1.50	1.65	15	7.5	9.8	11.0	20	30
SER2918H-223KL	22	2.60	2.86	15	12.0	14.0	15.0	20	28
SER2915H-223KL	22	1.86	2.05	10	7.0	8.6	9.6	20	30
SER2915L-223KL	22	1.50	1.65	10	4.5	6.0	6.8	20	30
SER2918H-333KL	33	2.60	2.86	10	7.0	8.7	9.6	20	28
SER2915H-333KL	33	1.86	2.05	8	4.0	5.1	5.9	20	30
SER2915L-333KL	33	1.50	1.65	7	2.0	2.6	3.3	20	30

SER2915, SER2918, SER1590, SER2009, SER20xx

SER2211

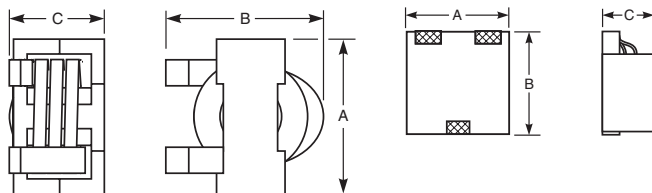

Dimensions (inches/mm)


Series	Amax	Bmax	Cmax
SER1590	0.62 15.75	0.64 16.26	0.40 10.16
SER2009	0.79 20.07	0.77 19.56	0.34 8.64
SER2010	0.79 20.07	0.77 19.56	0.37 9.40
SER2011	0.79 20.07	0.77 19.56	0.42 10.67
SER2012	0.79 20.07	0.77 19.56	0.47 11.94
SER2013	0.79 20.07	0.77 19.56	0.51 12.95
SER2014	0.79 20.07	0.77 19.56	0.55 13.97
SER2211	0.886 22.5	0.756 19.2	0.413 10.5
SER2915	1.1279	1.1279	0.605 15.36
SER2918	1.1279	1.1279	0.700 17.78



NEW!

Q200
125°
AGM2222

Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		typ	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
AGM2222-192ME	1.9	0.62	0.80	65.0	49.0	81.5	110.0	37.0	54.0
AGM2222-222ME	2.2	0.62	0.80	62.0	35.0	60.0	84.0	37.0	54.0
AGM2222-282ME	2.8	0.74	0.85	46.0	41.0	66.5	93.5	33.0	47.0
AGM2222-322ME	3.2	0.74	0.85	45.8	29.0	50.0	71.0	33.0	47.0
AGM2222-392ME	3.9	0.77	0.90	34.0	35.0	57.5	80.0	32.0	45.0
AGM2222-432ME	4.3	0.77	0.90	35.0	23.0	40.0	57.0	32.0	45.0
AGM2222-512ME	5.1	1.10	1.40	33.0	31.0	50.0	71.0	28.0	40.0
AGM2222-562ME	5.6	1.10	1.40	29.5	22.0	38.0	55.0	28.0	40.0
AGM2222-652ME	6.5	1.47	1.80	29.0	27.5	44.0	62.0	25.0	35.0
AGM2222-712ME	7.1	1.47	1.80	29.0	18.0	32.0	46.0	25.0	35.0
AGM2222-802ME	8.0	1.70	2.00	24.5	24.5	40.0	56.0	22.0	32.0
AGM2222-882ME	8.8	1.70	2.00	24.5	17.0	29.0	42.0	22.0	32.0
AGM2222-103ME	10.0	2.08	2.50	23.0	15.0	26.0	37.0	21.0	30.0

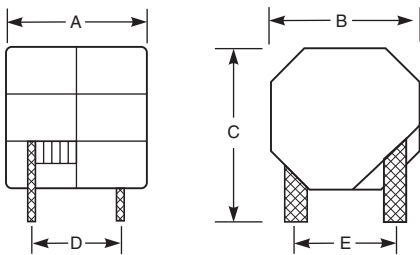


Dimensions (inches mm)

Series	Amax	Bmax	Cmax	D cen	E cen
AGM2222	0.905 23.0	0.905 23.0	1.07 27.3	0.562-0.602 14.3-15.3	0.551 14.0



Q200
125°
AGP4233

Part number	Inductance ±20% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
AGP4233-332ME	3.3	0.67	0.75	27.7	92.0	95.0	98.0	34	44
AGP4233-562ME	5.6	0.67	0.75	22.8	63.0	65.0	67.0	34	44
AGP4233-682ME	6.8	2.80	2.95	21.7	92.0	97.8	101.8	24	34
AGP4233-103ME	10	2.80	2.95	18.8	56.0	60.0	63.0	24	34
AGP4233-153ME	15	2.80	2.95	15.2	45.0	47.0	49.0	24	34
AGP4233-223ME	22	2.80	2.95	12.0	32.8	35.4	36.6	24	34
AGP4233-333ME	33	2.80	2.95	10.0	22.5	24.7	25.8	24	34
AGP4233-473ME	47	2.80	2.95	8.5	16.0	17.6	18.6	24	34
AGP4233-683ME	68	2.80	2.95	6.4	10.6	12.2	13.0	24	34
AGP4233-104ME	100	2.80	2.95	5.2	6.88	7.80	8.36	24	34
AGP4233-154ME	150	2.80	2.95	4.2	4.18	4.96	5.40	24	34
AGP4233-224ME	220	10.5	11.5	5.0	6.40	7.20	7.60	12.4	17.5
AGP4233-334ME	330	10.5	11.5	4.1	4.20	4.70	5.00	12.4	17.5
AGP4233-474ME	470	10.5	11.5	3.6	2.60	3.20	3.40	12.4	17.5

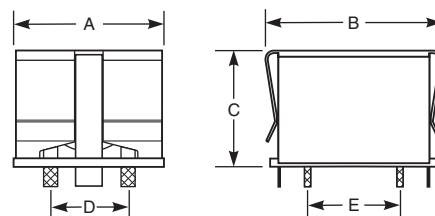


Dimensions (inches mm)

Series	Amax	Bmax	Cmax	D cen	E cen
AGP4233	1.45 36.8	1.57 40.3	1.10 28.0	0.728 18.5	0.826-0.886 21.0-22.5



Q200
140°
AGP2923

Part number	Inductance ±10% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
AGP2923-332KL	3.3	2.3	2.6	40	95.0	104	108	19	26
AGP2923-472KL	4.7	2.3	2.6	30	63.0	72.0	76.0	19	26
AGP2923-682KL	6.8	2.3	2.6	25	48.0	53.0	56.0	19	26
AGP2923-103KL	10	2.3	2.6	20	30.0	34.0	37.0	19	26
AGP2923-153KL	15	2.3	2.6	16	20.5	23.0	24.5	19	26
AGP2923-223KL	22	2.3	2.6	13	12.2	14.7	16.4	19	26
AGP2923-333KL	33	2.3	2.6	10	7.5	9.2	10.3	19	26




Dimensions (inches mm)

Series	Amax	Bmax	Cmax	D cen
AGP2923	0.668 16.97	1.08 27.43	0.935 23.75	0.65 16.51



VER2923

Part number	Inductance ±10% (µH)	DCR (mOhms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
VER2923-332KL	3.3	2.3	2.6	40	95.0	104	108	19	26
VER2923-472KL	4.7	2.3	2.6	30	63.0	72.0	76.0	19	26
VER2923-682KL	6.8	2.3	2.6	25	48.0	53.0	56.0	19	26
VER2923-103KL	10	2.3	2.6	20	30.0	34.0	37.0	19	26
VER2923-153KL	15	2.3	2.6	16	20.5	23.0	24.5	19	26
VER2923-223KL	22	2.3	2.6	13	12.2	14.7	16.4	19	26
VER2923-333KL	33	2.3	2.6	10	7.5	9.2	10.3	19	26



Dimensions (inches mm)

Series	Amax	Bmax	Cmax	D cen
VER2923	0.668 16.97	1.08 27.43	0.895 22.74	0.65 16.51



Unshielded SM Power Inductors

SPICE models
ON OUR WEB SITE

Q200 85° DO1605T


Part number	Inductance ±20% (µH)	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
DO1605T-102MLC	1.0	0.04	230	2.5	2.3
DO1605T-152MLC	1.5	0.06	180	2.2	2.1
DO1605T-222MLC	2.2	0.07	140	1.8	1.7
DO1605T-332MLC	3.3	0.12	110	1.4	1.3
DO1605T-472MLC	4.7	0.15	100	1.2	1.1
DO1605T-682MLC	6.8	0.20	80	1.1	1.0
DO1605T-822MLC	8.2	0.23	70	1.0	0.95
DO1605T-103MLC	10	0.27	60	1.0	0.90
DO1605T-153MLC	15	0.35	45	0.8	0.70
DO1605T-223MLC	22	0.54	35	0.6	0.50
DO1605T-333MLC	33	0.74	30	0.5	0.45
DO1605T-473MLC	47	1.1	22	0.45	0.40
DO1605T-683MLC	68	1.6	20	0.35	0.35
DO1605T-104MLC	100	2.3	15	0.30	0.30
DO1605T-154MLC	150	3.5	10	0.25	0.25
DO1605T-224MLC	220	5.7	9	0.20	0.18
DO1605T-334MLC	330	8.2	8	0.16	0.16
DO1605T-474MLC	470	10.8	7	0.14	0.12
DO1605T-684MLC	680	17.2	5	0.12	0.10
DO1605T-105MLC	1000	22.6	4	0.08	0.08

Q200 85° DO1606T

Part number	Inductance ±20% (µH)	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
DO1606T-102MLC	1.0	0.04	230	2.5	2.3
DO1606T-152MLC	1.5	0.06	180	2.2	2.1
DO1606T-222MLC	2.2	0.07	140	1.8	1.7
DO1606T-332MLC	3.3	0.12	110	1.4	1.3
DO1606T-472MLC	4.7	0.15	100	1.2	1.1
DO1606T-682MLC	6.8	0.20	80	1.1	1.0
DO1606T-822MLC	8.2	0.23	70	1.0	0.95
DO1606T-103MLC	10	0.30	60	1.0	0.90
DO1606T-153MLC	15	0.40	45	0.8	0.70
DO1606T-223MLC	22	0.54	35	0.6	0.50
DO1606T-333MLC	33	0.74	30	0.5	0.45
DO1606T-473MLC	47	1.1	22	0.45	0.40
DO1606T-683MLC	68	1.6	20	0.35	0.35
DO1606T-104MLC	100	2.3	15	0.30	0.30
DO1606T-154MLC	150	3.5	10	0.25	0.25
DO1606T-224MLC	220	5.7	9	0.20	0.18
DO1606T-334MLC	330	8.2	8	0.16	0.16
DO1606T-474MLC	470	10.8	7	0.14	0.12
DO1606T-684MLC	680	17.2	5	0.12	0.10
DO1606T-105MLC	1000	22.6	4	0.08	0.08


Q200 85° DO3314

Part number	Inductance ±20% (µH)	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
DO3314-102MLC	1.0	0.11	160	2.10	1.70
DO3314-152MLC	1.5	0.14	140	2.00	1.40
DO3314-222MLC	2.2	0.20	90	1.60	1.30
DO3314-332MLC	3.3	0.26	80	1.40	1.20
DO3314-472MLC	4.7	0.32	60	1.20	1.10
DO3314-682MLC	6.8	0.44	45	0.92	0.80
DO3314-822MLC	8.2	0.47	45	0.90	0.75
DO3314-103MLC	10	0.52	40	0.80	0.75
DO3314-153MLC	15	0.86	30	0.68	0.65
DO3314-223MLC	22	1.20	20	0.56	0.50
DO3314-333MLC	33	1.62	15	0.51	0.40



Dimensions (inches mm)

Series	A max	B max	C max	D	E
DO1606T	0.210 5,30	0.260 6,60	0.079 2,00	0.080 2,00	0.029 0,74



Dimensions (inches mm)


Series	A max	B max	C max	D
DO1605T	0.165 4,20	0.216 5,50	0.071 1,80	0.029 0,74
DO3314	0.138 3,50	0.138 3,50	0.055 1,40	0.040 1,02

ME3215

Partnumber	Inductance (µH)	DCRmax (Ohms)	SRF typ (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
ME3215-102MLC	1.0±20%	0.058	200	1.85	2.10	2.25	1.70	2.30
ME3215-222MLC	2.2±20%	0.107	135	1.25	1.45	1.50	1.30	1.70
ME3215-332MLC	3.3±20%	0.170	105	1.00	1.15	1.25	1.05	1.45
ME3215-472MLC	4.7±20%	0.245	90	0.85	1.00	1.05	0.83	1.14
ME3215-103KLC	10±10%	0.505	60	0.62	0.70	0.76	0.60	0.79
ME3215-153KLC	15±10%	0.773	50	0.51	0.57	0.62	0.48	0.65
ME3215-223KLC	22±10%	1.00	38	0.42	0.48	0.51	0.42	0.56
ME3215-333KLC	33±10%	1.48	30	0.33	0.38	0.41	0.35	0.48
ME3215-473KLC	47±10%	2.33	24	0.28	0.32	0.34	0.35	0.48
ME3215-683KLC	68±10%	3.40	20	0.23	0.26	0.28	0.24	0.32
ME3215-104KLC	100±10%	4.67	16	0.19	0.22	0.23	0.18	0.25

ME3220

Partnumber	Inductance (µH)	DCRmax (Ohms)	SRF typ (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
ME3220-102MLC	1.0±20%	0.058	170.7	2.7	3.0	3.2	2.0	2.6
ME3220-152MLC	1.5±20%	0.068	138.0	2.2	2.5	2.7	1.6	2.2
ME3220-222MLC	2.2±20%	0.104	92.6	1.8	2.1	2.2	1.5	2.0
ME3220-332MLC	3.3±20%	0.138	75.6	1.5	1.6	1.7	1.4	1.6
ME3220-472MLC	4.7±20%	0.190	58.2	1.2	1.4	1.5	1.0	1.3
ME3220-562MLC	5.6±20%	0.200	52.5	1.1	1.3	1.4	1.0	1.3
ME3220-682MLC	6.8±20%	0.270	46.2	1.0	1.1	1.2	0.88	1.1
ME3220-822MLC	8.2±20%	0.290	45.2	0.98	1.0	1.1	0.80	1.0
ME3220-103KLC	10±10%	0.434	39.9	0.78	1.0	1.1	0.63	0.87
ME3220-123KLC	12±10%	0.470	37.5	0.76	0.88	0.98	0.61	0.84
ME3220-153KLC	15±10%	0.520	32.5	0.70	0.80	0.90	0.58	0.83
ME3220-183KLC	18±10%	0.696	31.7	0.66	0.75	0.80	0.49	0.70
ME3220-223KLC	22±10%	0.787	29.4	0.59	0.67	0.71	0.47	0.64
ME3220-273KLC	27±10%	1.19	26.1	0.56	0.63	0.67	0.40	0.54
ME3220-333KLC	33±10%	1.27	23.0	0.50	0.57	0.60	0.39	0.53
ME3220-393KLC	39±10%	1.38	22.6	0.45	0.51	0.54	0.34	0.47
ME3220-473KLC	47±10%	1.80	20.7	0.40	0.46	0.49	0.30	0.45
ME3220-563KLC	56±10%	2.10	20.3	0.37	0.42	0.45	0.27	0.43
ME3220-683KLC	68±10%	2.30	16.3	0.34	0.38	0.41	0.26	0.38
ME3220-823KLC	82±10%	3.00	13.7	0.30	0.34	0.36	0.25	0.34
ME3220-104KLC	100±10%	3.50	13.3	0.28	0.32	0.34	0.24	0.32



Dimensions (inches mm)


Series	A max	B max	C max	D
ME3215	0.138 3.5	0.110 2.8	0.067 1.70	0.035 0.90
ME3220	0.138 3.5	0.110 2.8	0.095 2.40	0.043 1.1

SD43

Partnumber	Inductance (µH)	DCRmax (Ohms)	SRF typ (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
SD43-102MLC	1.0±20%	0.033	100	5.5	6.1	6.5	3.4	5.8
SD43-142MLC	1.4±20%	0.038	90	4.8	5.5	5.9	3.1	5.8
SD43-182MLC	1.8±20%	0.042	80	4.1	4.6	5.1	2.7	4.6
SD43-222MLC	2.2±20%	0.047	65	3.6	4.1	4.4	2.3	3.8
SD43-272MLC	2.7±20%	0.052	60	3.4	3.8	4.1	2.2	3.7
SD43-332MLC	3.3±20%	0.058	50	2.9	3.3	3.5	2.1	3.3
SD43-392MLC	3.9±20%	0.076	47	2.6	3.0	3.2	1.9	3.0
SD43-472MLC	4.7±20%	0.094	45	2.4	2.8	3.0	1.9	2.9
SD43-562MLC	5.6±20%	0.101	40	2.2	2.5	2.7	1.6	2.8
SD43-682MLC	6.8±20%	0.110	35	2.0	2.3	2.5	1.5	2.5
SD43-822MLC	8.2±20%	0.132	30	1.83	2.1	2.2	1.4	2.2
SD43-103MLC	10.0±20%	0.182	28	1.70	1.95	2.1	1.3	2.2
SD43-123MLC	12.0±20%	0.210	24	1.53	1.75	1.90	1.1	1.8
SD43-153MLC	15.0±20%	0.235	22	1.33	1.58	1.73	1.0	1.7
SD43-183MLC	18.0±20%	0.338	19	1.25	1.43	1.58	0.89	1.5
SD43-223MLC	22.0±20%	0.378	17	1.15	1.32	1.43	0.85	1.4
SD43-273MLC	27.0±20%	0.522	16	1.00	1.14	1.26	0.73	1.1
SD43-333KLC	33.0±10%	0.540	14	0.90	1.05	1.14	0.62	0.90
SD43-393KLC	39.0±10%	0.587	13	0.84	0.97	1.07	0.61	0.90
SD43-473KLC	47.0±10%	0.844	12	0.77	0.87	0.93	0.53	0.86
SD43-563KLC	56.0±10%	0.937	11	0.72	0.80	0.86	0.51	0.70
SD43-683KLC	68.0±10%	1.117	10	0.65	0.72	0.77	0.43	0.60

SD54

Partnumber	Inductance (µH)	DCR(Ohms)		SRF typ (MHz)	Isat (A)			Irms(A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
SD54-103MLC	10±20%	0.072	0.079	28	2.0	2.3	2.4	1.7	2.3
SD54-123MLC	12±20%	0.080	0.088	26	1.8	2.0	2.2	1.6	2.2
SD54-153MLC	15±20%	0.094	0.103	23	1.5	1.8	1.9	1.5	2.1
SD54-183MLC	18±20%	0.103	0.113	21	1.4	1.6	1.8	1.4	2.0
SD54-223MLC	22±20%	0.119	0.130	19	1.3	1.5	1.6	1.3	1.8
SD54-273MLC	27±20%	0.134	0.147	18	1.2	1.4	1.4	1.2	1.7
SD54-333MLC	33±20%	0.150	0.165	16	1.1	1.2	1.3	1.2	1.6
SD54-393MLC	39±20%	0.195	0.214	13	1.0	1.1	1.2	1.0	1.4
SD54-473MLC	47±20%	0.222	0.244	12	0.92	1.0	1.1	0.97	1.3
SD54-563KLC	56±10%	0.251	0.276	11	0.83	0.96	1.0	0.92	1.3
SD54-683KLC	68±10%	0.335	0.368	9.3	0.76	0.88	0.95	0.80	1.1
SD54-823KLC	82±10%	0.379	0.416	8.4	0.69	0.80	0.85	0.74	1.1
SD54-104KLC	100±10%	0.503	0.553	7.4	0.62	0.72	0.77	0.64	0.88
SD54-124KLC	120±10%	0.579	0.636	7.0	0.56	0.66	0.71	0.58	0.80
SD54-154KLC	150±10%	0.654	0.719	6.3	0.51	0.60	0.64	0.57	0.77
SD54-184KLC	180±10%	0.874	0.961	5.5	0.46	0.53	0.57	0.49	0.67
SD54-224KLC	220±10%	0.996	1.095	5.0	0.43	0.50	0.54	0.47	0.66



Dimensions (inches mm)

Series	A max	B max	C max	D	E
SD43	0.185 4.7	0.165 4.2	0.136 3.45	0.063 1.60	0.051 1.30
SD54	0.236 6.0	0.222 5.63	0.197 5.0	0.090 2.29	0.105 2.67

DO1608C



Part number	Inductance ±20% (µH)	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)	
					20° rise	40° rise
DO1608C-102MLC	1.0	0.05	130	2.90	1.90	2.70
DO1608C-152MLC	1.5	0.06	115	2.60	1.90	2.65
DO1608C-222MLC	2.2	0.07	100	2.30	1.85	2.55
DO1608C-272MLC	2.7	0.08	75	2.10	1.80	2.45
DO1608C-332MLC	3.3	0.08	70	2.00	1.60	2.20
DO1608C-472MLC	4.7	0.09	50	1.50	1.40	1.90
DO1608C-682MLC	6.8	0.13	45	1.20	1.20	1.60
DO1608C-822MLC	8.2	0.16	40	1.15	1.10	1.55
DO1608C-103MLC	10	0.16	35	1.10	1.10	1.50
DO1608C-153MLC	15	0.23	30	0.90	0.90	1.25
DO1608C-223MLC	22	0.37	20	0.70	0.75	0.95
DO1608C-333MLC	33	0.51	15	0.58	0.60	0.80
DO1608C-473MLC	47	0.64	14	0.50	0.52	0.70
DO1608C-683MLC	68	0.86	11	0.40	0.44	0.60
DO1608C-104MLC	100	1.27	9.0	0.31	0.37	0.50
DO1608C-154MLC	150	2.00	6.0	0.27	0.28	0.39
DO1608C-224MLC	220	3.11	5.5	0.22	0.23	0.31
DO1608C-334MLC	330	3.80	5.0	0.18	0.22	0.30
DO1608C-474MLC	470	5.06	4.0	0.16	0.20	0.26
DO1608C-684MLC	680	9.20	3.0	0.14	0.14	0.19
DO1608C-105MLC	1000	13.8	2.0	0.10	0.11	0.15

DO3316P



Part number	Inductance (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
DO3316P-152MLD	1.5	20	0.010	90	8.0	6.4
DO3316P-222_LD	2.2	20.10	0.012	80	7.0	6.1
DO3316P-332_LD	3.3	20.10	0.015	65	6.4	5.4
DO3316P-472_LD	4.7	20.10	0.018	45	5.4	4.8
DO3316P-682_LD	6.8	20.10	0.027	38	4.6	4.4
DO3316P-103_LD	10	20.10	0.038	30	3.8	3.9
DO3316P-153_LD	15	20.10	0.046	27	3.0	3.1
DO3316P-223_LD	22	20.10	0.085	19	2.6	2.7
DO3316P-333_LD	33	20.10	0.10	15	2.0	2.1
DO3316P-473_LD	47	20.10	0.14	12	1.6	1.8
DO3316P-683_LD	68	20.10	0.20	10	1.4	1.5
DO3316P-104_LD	100	20.10	0.28	9	1.2	1.3
DO3316P-154_LD	150	20.10	0.40	6	1.0	1.0
DO3316P-224_LD	220	20.10	0.61	5	0.8	0.80
DO3316P-334_LD	330	20.10	1.02	4.5	0.60	0.60
DO3316P-474_LD	470	20.10	1.27	3.5	0.50	0.50
DO3316P-684_LD	680	20.10	2.02	2.5	0.40	0.40
DO3316P-105_LD	1000	20.10	3.00	2.0	0.30	0.30
DO3316P-155_LD	1500	20.10	4.49	1.7	0.29	0.27
DO3316P-335_LD	3300	20.10	8.97	1.1	0.19	0.17

DO3308P Low Profile




Part number	Inductance (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
DO3308P-682_LD	6.8	20.10	0.060	47	3.9	2.6
DO3308P-103_LD	10	20.10	0.085	35	2.7	2.3
DO3308P-153_LD	15	20.10	0.12	33	2.3	1.9
DO3308P-223_LD	22	20.10	0.18	25	1.8	1.5
DO3308P-333_LD	33	20.10	0.25	19	1.6	1.2
DO3308P-473_LD	47	20.10	0.32	14	1.3	1.0
DO3308P-683_LD	68	20.10	0.54	12	1.1	0.90
DO3308P-104_LD	100	20.10	0.69	10	0.87	0.73
DO3308P-154_LD	150	20.10	0.94	8.0	0.74	0.62
DO3308P-224_LD	220	20.10	1.60	6.0	0.56	0.51
DO3308P-334_LD	330	20.10	2.15	5.0	0.50	0.40
DO3308P-474_LD	470	20.10	3.30	4.0	0.40	0.33
DO3308P-684_LD	680	20.10	4.40	3.0	0.33	0.28
DO3308P-105_LD	1000	20.10	7.00	2.5	0.29	0.23

* Bold numbers indicate tolerances carried in stock. When ordering, please replace underscore in part number with the proper tolerance code: K = 10%, M = 20%. (e.g. DO3308P-105KLD for a 10% tolerance part.)



DO3316T

Part number	Inductance (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
DO3316T-681MLD	0.68	20	0.005	200	13	12
DO3316T-102MLD	1.0	20	0.006	100	11	10
DO3316T-152MLD	1.5	20	0.008	90	9.0	9.0
DO3316T-222_LD	2.2	20.10	0.011	90	7.8	7.4
DO3316T-272_LD	2.7	20.10	0.012	65	7.0	6.6
DO3316T-332_LD	3.3	20.10	0.014	60	6.4	5.9
DO3316T-392_LD	3.9	20.10	0.015	50	5.9	5.3
DO3316T-472_LD	4.7	20.10	0.018	50	5.4	4.8
DO3316T-562_LD	5.6	20.10	0.021	45	4.7	4.65
DO3316T-682_LD	6.8	20.10	0.024	43	4.4	4.40
DO3316T-822_LD	8.2	20.10	0.032	34	4.0	4.15
DO3316T-103_LD	10	20.10	0.034	31	3.9	3.90
DO3316T-123_LD	12	20.10	0.036	27	3.4	3.50
DO3316T-153_LD	15	20.10	0.045	25	3.1	3.10
DO3316T-183_LD	18	20.10	0.050	22	2.8	2.90
DO3316T-223_LD	22	20.10	0.070	18	2.5	2.70
DO3316T-273_LD	27	20.10	0.085	18	2.3	2.30
DO3316T-333_LD	33	20.10	0.100	17	2.0	2.10
DO3316T-393_LD	39	20.10	0.120	15	1.8	1.95
DO3316T-473_LD	47	20.10	0.150	14	1.65	1.80
DO3316T-563_LD	56	20.10	0.165	12	1.45	1.65
DO3316T-683_LD	68	20.10	0.220	11	1.40	1.50
DO3316T-823_LD	82	20.10	0.250	10	1.30	1.40
DO3316T-104_LD	100	20.10	0.280	9.0	1.20	1.30
DO3316T-124_LD	120	20.10	0.400	8.0	1.00	1.00
DO3316T-154_LD	150	20.10	0.460	6.0	0.90	0.90
DO3316T-184_LD	180	20.10	0.520	6.0	0.85	0.85
DO3316T-224_LD	220	20.10	0.700	5.0	0.80	0.80
DO3316T-274_LD	270	20.10	0.800	5.0	0.75	0.70
DO3316T-334_LD	330	20.10	1.07	4.5	0.60	0.60
DO3316T-394_LD	390	20.10	1.14	4.0	0.62	0.55
DO3316T-474_LD	470	20.10	1.27	3.5	0.50	0.50

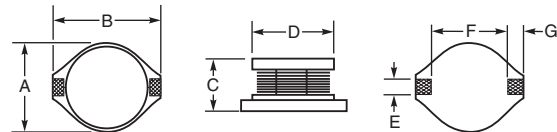

Dimensions (inches mm)

Series	A max	B max	C	D	E	F	G
DO1608C	0.175 4.45	0.260 6.60	0.115 2.92	0.155 3.94	0.050 1.27	0.170 4.32	0.040 1.02
DO3308P	0.370 9.40	0.510 12.95	0.118 3.00	0.330 8.38	0.100 2.54	0.300 7.62	0.100 2.54
DO3316P	0.370 9.40	0.510 12.95	0.205 5.21	0.330 8.38	0.100 2.54	0.300 7.62	0.100 2.54
DO3316T	0.390 9.91	0.510 12.95	0.250 6.35	0.330 8.38	0.160 4.06	0.400 10.16	0.060 1.52

Q200
85°

D01607B



Part number	Inductance ±20% (mH)	DCR max (Ohms)	Insulation core-winding (MOhms)	Isat (mA) 10% drop	Irms (mA)
D01607B-105MLC	1.0	19	>10	100	150
D01607B-155MLC	1.5	21	>10	75	140
D01607B-225MLC	2.2	42	>10	60	100
D01607B-335MLC	3.3	52	>10	50	90
D01607B-475MLC	4.7	80	>10	45	75
D01607B-685MLC	6.8	125	>10	40	60

Q200
85°

D01813H High Current



Part number	Inductance ref (µH)	Inductance ±20% (µH)	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 30% drop	Irms (A)
D01813H-181MLD	0.18	0.18	0.003	800	14.0	10.0
D01813H-331MLD	0.33	0.33	0.004	600	10.0	7.0
D01813H-561MLD	0.56	0.56	0.010	200	7.7	6.0
D01813H-122MLD	1.2	1.15	0.017	140	5.3	4.4
D01813H-222MLD	2.2	2.06	0.035	100	3.5	3.1
D01813H-332MLD	3.3	3.20	0.040	80	3.0	2.7
D01813H-472MLD	4.7	4.70	0.054	50	2.6	2.2
D01813H-682MLD	6.8	6.80	0.080	45	2.2	1.8
D01813H-822MLD	8.2	8.20	0.092	42	2.0	1.6
D01813H-103MLD	10	9.55	0.110	40	1.9	1.5
D01813H-153MLD	15	15.3	0.17	30	1.5	1.2
D01813H-223MLD	22	22.6	0.25	25	1.2	1.0
D01813H-333MLD	33	32.5	0.35	20	0.99	0.82
D01813H-473MLD	47	48.1	0.47	15	0.87	0.72

Q200
85°

D03316H High Current



Part number	Inductance ±20% (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
D03316H-121MLD	0.12	20	0.0015	200	28.0	17.0
D03316H-331MLD	0.33	20	0.002	200	20.0	16.0
D03316H-681MLD	0.68	20	0.005	200	13.0	12.0
D03316H-102MLD	1.0	20	0.006	100	11.0	10.0
D03316H-152MLD	1.5	20	0.008	90	9.0	9.0
D03316H-222_LD	2.2	20.10	0.011	80	7.8	7.4
D03316H-272_LD	2.7	20.10	0.012	65	7.0	6.6
D03316H-332_LD	3.3	20.10	0.014	60	6.4	5.9
D03316H-392_LD	3.9	20.10	0.015	50	5.9	5.3
D03316H-472_LD	4.7	20.10	0.018	45	5.4	4.8

* Bold numbers indicate tolerances carried in stock. When ordering, please replace underscore in part number with the proper tolerance code: K = 10%, M = 20%. (e.g. D03316H-472KLD for a 10% tolerance part)

Q200
125°

D03340H




Part number	Inductance (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)	
					20° rise	40° rise
D03340H-271NLD	0.27±30%	2.5	410	54.0	20.0	30.0
D03340H-471NLD	0.47±30%	3.0	210	43.0	15.0	22.5
D03340H-102MLD	1.0±20%	6.5	130	25.0	10.7	16.0
D03340H-152MLD	1.5±20%	7.0	100	21.5	9.70	14.5
D03340H-222MLD	2.2±20%	8.0	82	19.0	8.80	13.2
D03340H-272MLD	2.7±20%	12	68	16.4	7.40	11.1
D03340H-332MLD	3.3±20%	15	60	15.3	6.20	9.30
D03340H-392MLD	3.9±20%	17	57	14.1	5.60	8.40
D03340H-472MLD	4.7±20%	19	47	13.1	5.10	7.60
D03340H-562MLD	5.6±20%	22	42	12.3	4.60	6.90
D03340H-682MLD	6.8±20%	24	37	11.2	3.85	5.77
D03340H-822MLD	8.2±20%	26	28	10.0	3.50	5.25
D03340H-103MLD	10±20%	31	24	9.20	3.20	4.80
D03340H-123MLD	12±20%	36	19	8.20	2.90	4.35
D03340H-153MLD	15±20%	41	15.0	7.80	2.70	4.05
D03340H-183MLD	18±20%	44	15.0	7.30	2.60	3.90
D03340H-223MLD	22±20%	52	14.0	6.50	2.40	3.60
D03340H-273MLD	27±20%	73	12.6	5.80	2.30	3.45
D03340H-333KLD	33±10%	80	12.4	5.50	2.00	3.00
D03340H-393KLD	39±10%	95	9.8	5.00	1.80	2.70
D03340H-473KLD	47±10%	100	9.0	4.60	1.50	2.25
D03340H-563KLD	56±10%	135	7.8	4.20	1.40	2.10
D03340H-683KLD	68±10%	145	7.4	3.90	1.20	1.80
D03340H-823KLD	82±10%	162	5.9	3.50	1.20	1.80
D03340H-104KLD	100±10%	187	6.0	3.20	1.20	1.80
D03340H-124KLD	120±10%	240	5.0	2.90	1.00	1.50
D03340H-154KLD	150±10%	280	4.7	2.60	0.90	1.35
D03340H-184KLD	180±10%	320	4.5	2.50	0.80	1.20
D03340H-224KLD	220±10%	375	4.0	2.30	0.70	1.05
D03340H-274KLD	270±10%	475	3.7	2.00	0.65	0.97
D03340H-334KLD	330±10%	570	3.2	1.80	0.60	0.90
D03340H-394KLD	390±10%	685	2.9	1.70	0.55	0.82
D03340H-474KLD	470±10%	795	2.6	1.50	0.30	0.45
D03340H-564KLD	560±10%	910	2.3	1.40	0.30	0.45
D03340H-684KLD	680±10%	1200	2.0	1.25	0.30	0.45
D03340H-824KLD	820±10%	1350	1.8	1.15	0.25	0.37
D03340H-105KLD	1000±10%	1620	1.5	1.00	0.20	0.30

D03340P High Current



Part number	Inductance ±20% (µH)	DCR max (Ohms)	SRF typ (MHz)	Isat (A) 10% drop	Irms (A)
D03340P-103MLD	10	0.040	35	8.0	3.5
D03340P-153MLD	15	0.050	18	7.0	3.0
D03340P-223MLD	22	0.066	13	5.5	2.5
D03340P-333MLD	33	0.080	11	4.0	2.0
D03340P-473MLD	47	0.11	9.0	3.8	1.6
D03340P-683MLD	68	0.17	7.0	3.0	1.2
D03340P-104MLD	100	0.22	5.5	2.5	1.2
D03340P-154MLD	150	0.34	4.5	2.0	0.9
D03340P-224MLD	220	0.44	3.5	1.6	0.7
D03340P-334MLD	330	0.70	3.0	1.2	0.6
D03340P-474MLD	470	0.95	2.5	1.0	0.3
D03340P-684MLD	680	1.15	2.0	1.0	0.2
D03340P-105MLD	1000	2.0	1.5	0.8	0.1

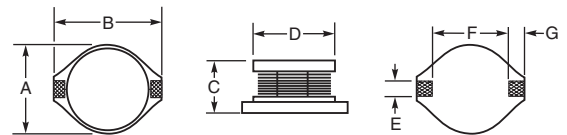

Dimensions (inches mm)

Series	A max	B max	C	D	E	F	G
D01607B	0.175 4.45	0.260 6.60	0.098 2.49	0.155 3.94	0.050 1.27	0.170 4.32	0.040 1.02
D01813H	0.240 6.10	0.350 8.89	0.197 5.00	0.180 4.60	0.160 4.06	0.230 5.84	0.075 1.91
D03316H	0.390 9.91	0.510 12.95	0.250 6.35	0.330 8.38	0.160 4.06	0.400 10.16	0.060 1.52
D03340H	0.390 9.91	0.520 13.21	0.470 11.91	0.330 8.38	0.125 3.18	0.360 9.14	0.060 1.52
D03340P	0.370 9.40	0.510 12.95	0.450 11.43	0.330 8.38	0.100 2.54	0.300 7.62	0.100 2.54




DO5010H High Current



Part number	Inductance ±20% (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A)		I _{rms} (A)
				10% drop	20% drop	
DO5010H-781MLD	0.78	2.6	156	30	15	15
DO5010H-152MLD	1.5	4.0	100	25	15	15
DO5010H-222MLD	2.2	6.1	75	20	12	12
DO5010H-332MLD	3.3	8.6	60	17	10	10
DO5010H-392MLD	3.9	10	55	15	9.0	9.0
DO5010H-472MLD	4.7	14	40	13	8.4	8.4
DO5010H-602MLD	6.0	17	35	12	7.5	7.5
DO5010H-782MLD	7.8	18	35	11	7.5	7.5
DO5010H-103MLD	10	26	28	10	6.0	6.0
DO5010H-123MLD	12	28	26	8.5	5.2	5.2
DO5010H-153MLD	15	32	20	8	4.4	4.4
DO5010H-223MLD	22	47	20	7.0	3.5	3.5
DO5010H-333MLD	33	66	15	5.5	3.0	3.0
DO5010H-473MLD	47	86	9.0	4.5	2.6	2.6
DO5010H-683MLD	68	130	8.0	3.5	2.3	2.3
DO5010H-104MLD	100	190	7.0	3.0	1.8	1.8
DO5010H-154MLD	150	250	6.0	2.6	1.5	1.5
DO5010H-224MLD	220	380	5.0	2.4	1.2	1.2
DO5010H-334MLD	330	560	4.0	1.9	1.0	1.0
DO5010H-474MLD	470	850	3.0	1.4	0.82	0.82
DO5010H-684MLD	680	1100	2.5	1.2	0.72	0.72
DO5010H-105MLD	1000	1800	2.0	1.0	0.56	0.56



DO5040H High Current




Part number	Inductance (µH)	DCR max (mOhms)	SRF typ (MHz)	Isat (A)		I _{rms} (A)
				10% drop	20% drop	
DO5040H-282MLD	2.8±20%	5.2	65	33.4	12.1	12.1
DO5040H-392MLD	3.9±20%	6.0	40	26.8	11.2	11.2
DO5040H-682MLD	6.8±20%	9.0	30	22.5	9.6	9.6
DO5040H-103MLD	10±20%	11	22	17.8	8.6	8.6
DO5040H-123MLD	12±20%	13	21	15.9	7.4	7.4
DO5040H-153MLD	15±20%	20	18	13.8	6.5	6.5
DO5040H-183MLD	18±20%	22	14	13.2	6.0	6.0
DO5040H-223MLD	22±20%	24	13	11.8	5.7	5.7
DO5040H-333MLD	33±20%	37	10	9.6	4.5	4.5
DO5040H-473MLD	47±20%	52	8.0	7.8	3.7	3.7
DO5040H-683MLD	68±20%	67	7.0	6.7	3.4	3.4
DO5040H-104MLD	100±20%	115	6.0	5.6	2.8	2.8
DO5040H-334MLD	330±10%	325	3.0	3.0	1.5	1.5
DO5040H-684KLD	680±10%	780	1.6	2.0	1.1	1.1
DO5040H-145KLD	1400±10%	1300	1.0	1.5	0.7	0.7



DO5022P

Part number	Inductance ±20% (µH)	Percent tolerance*	DCR max (Ohms)	SRF typ (MHz)	Isat (A)		I _{rms} (A)
					10% drop	20% drop	
DO5022P-102MLD	1.0	20	0.009	80	27.6	28.8	8.6
DO5022P-222MLD	2.2	20	0.014	80	18.5	19.8	7.1
DO5022P-332MLD	3.3	20	0.018	60	14.5	15.5	6.2
DO5022P-562MLD	5.6	20	0.020	40	12.5	13.8	5.3
DO5022P-822MLD	8.2	20	0.029	30	10.3	11.5	4.8
DO5022P-103MLD	10	20	0.031	30	9.4	10.5	4.3
DO5022P-153MLD	15	20	0.036	22	7.5	8.2	4.0
DO5022P-223MLD	22	20	0.047	20	6.5	7.2	3.5
DO5022P-333MLD	33	20	0.066	15	5.2	6.1	3.0
DO5022P-473MLD	47	20	0.086	9	4.2	4.7	2.6
DO5022P-683_LD	68	20.10	0.13	8	3.7	4.1	2.3
DO5022P-104_LD	100	20.10	0.19	7	3.0	3.4	1.8
DO5022P-154_LD	150	20.10	0.25	6	2.5	2.8	1.5
DO5022P-224_LD	220	20.10	0.38	5	2.0	2.3	1.2
DO5022P-334_LD	330	20.10	0.56	4	1.7	1.9	1.0
DO5022P-474_LD	470	20.10	0.85	3	1.5	1.7	0.82
DO5022P-684_LD	680	20.10	1.1	2.5	1.2	1.3	0.72
DO5022P-105_LD	1000	20.10	1.8	2.0	0.95	1.1	0.56

* Bold numbers indicate tolerances carried in stock. When ordering, please replace underscore in part number with the proper tolerance code: K = 10%, M = 20%. (e.g. DO5022P-105KLD for a 10% tolerance part.)

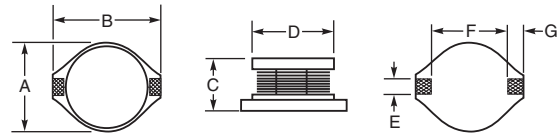

Dimensions (inches mm)

Series	A max	B max	C	D	E	F	G
DO5010H	0.600 15.24	0.730 18.54	0.315 8.00	0.500 12.70	0.200 5.08	0.580 14.73	0.065 1.65
DO5022P	0.600 15.24	0.730 18.54	0.280 7.11	0.500 12.70	0.100 2.54	0.500 12.70	0.100 2.54
DO5040H	0.640 16.26	0.880 22.35	0.472 12.00	0.500 12.70	0.450 11.43	0.565 14.35	0.125 3.18

RFS1113



Partnumber	Inductance ±20% (µH)	DCR (Ohms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
RFS1113-682ME	6.8	0.014	0.016	45.0	6.6	8.0	9.1	5.65	7.80
RFS1113-103ME	10	0.017	0.020	30.2	5.4	6.6	7.4	5.20	7.20
RFS1113-153ME	15	0.020	0.023	19.8	4.0	5.0	5.8	4.80	6.60
RFS1113-223ME	22	0.023	0.026	11.8	3.5	4.2	4.8	4.40	6.10
RFS1113-273ME	27	0.032	0.036	9.6	3.0	3.6	4.2	3.60	5.05
RFS1113-333ME	33	0.045	0.052	8.8	2.8	3.5	4.0	3.20	4.40
RFS1113-393ME	39	0.058	0.064	8.4	2.4	3.1	3.6	2.75	3.75
RFS1113-473ME	47	0.081	0.089	7.9	2.2	2.9	3.3	2.30	3.20
RFS1113-104ME	100	0.184	0.200	4.0	1.5	1.9	2.2	1.55	2.10
RFS1113-224ME	220	0.281	0.295	2.8	1.0	1.3	1.5	1.25	1.65
RFS1113-564ME	560	0.709	0.744	1.8	0.68	0.86	0.98	0.73	1.00
RFS1113-105ME	1000	1.80	1.89	1.3	0.51	0.63	0.73	0.46	0.60
RFS1113-275ME	2700	3.76	3.95	0.72	0.33	0.40	0.45	0.30	0.40

RFS1412



Partnumber	Inductance ±20% (µH)	DCR (Ohms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
RFS1412-103ME	10±20%	0.018	0.018	36	6.2	7.4	8.1	5.80	7.90
RFS1412-153LE	15±15%	0.019	0.022	21	5.0	6.1	6.8	5.05	6.90
RFS1412-223KE	22±10%	0.029	0.032	13	4.4	5.2	5.7	4.05	5.60
RFS1412-333KE	33±10%	0.043	0.047	8.7	3.4	4.1	4.6	3.25	4.50
RFS1412-393KE	39±10%	0.060	0.066	7.7	3.1	3.9	4.3	2.85	3.90
RFS1412-473KE	47±10%	0.066	0.072	6.7	3.0	3.5	3.9	2.65	3.65
RFS1412-104KE	100±10%	0.083	0.091	5.1	2.0	2.4	2.6	2.35	3.25
RFS1412-224KE	220±10%	0.190	0.200	3.3	1.3	1.6	1.8	1.55	2.35
RFS1412-564KE	560±10%	0.484	0.508	1.8	0.82	1.0	1.1	0.92	1.28
RFS1412-105KE	1000±10%	1.01	1.06	1.3	0.63	0.76	0.84	0.64	0.86
RFS1412-106KE	10000±10%	9.58	9.87	0.36	0.20	0.25	0.27	0.20	0.28



Dual Inductors for Class-D

Coilcraft offers a unique selection of dual inductors that significantly improve performance and reduce board area with a compact, single shielded package. Good linearity and ultra low total losses minimize total harmonic distortion plus noise (THD+N). With no crosstalk between windings, their high efficiency makes them ideal for use in handheld audio devices, portable docking stations, high-end TV soundbars, active speakers and subwoofers and automotive stereo audio systems.



HA4158, JA4575, GA3416

Partnumber	Output (W)	Inductance ±10% (µH)	DCRmax (mOhms)	SRF typ (MHz)	Isat (A)			Irms (A)	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
HA4158-ELD	68	10.0	13.0	21.5	6.0	6.7	7.1	4.0	6.0
JA4575-BLD	68	10.0	13.0	21.5	6.0	6.7	7.1	4.0	6.0
GA3416-CLD	60	10.0	21.0	23.6	8.6	8.7	8.8	3.0	4.3



YA9245 & ZA9336

NEW!

Partnumber	Inductance ±10%	DCRmax (Ohms)	SRF typ (MHz)	Isat (A)			Irms (A)	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
YA9245-ALD	9.0	0.022	40	7.9	8.3	8.8	4.0	5.6
ZA9336-ALD	21.0	0.035	20	4.9	5.2	5.4	2.5	3.5



RA7231

Partnumber	Output (W)	Inductance ±10% (µH)	DCRmax (mOhms)	SRF typ (MHz)	Isat (A)			Irms (A)	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
RA7231-ALD	40	5.0	6.0	34	15.5	16.6	17.6	7.6	10.6








UA801x

Partnumber	Output (W)	Inductance ±10% (µH)	DCRmax (mOhms)	SRF typ (MHz)	Isat (A)			Irms (A)	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
UA8013-ALD	100	7.0	6.6	40	12.0	12.5	13.2	6.5	9.0
UA8014-ALD	100	10.0	6.6	28	8.7	9.1	9.4	6.5	9.0

UA801x, HA4158, GA3416, RA7231, YA9245, ZA9336

JA4575



Dimensions (inches mm)

Series	A max	B max	C	D
GA3416	0.610 15.50	0.535 13.59	0.520 13.21	
HA4158	0.466 11.84	0.423 10.75	0.419 10.65	
JA4575	0.466 11.84	0.423 10.75	0.390 9.91	0.110 2.80
RA7231	0.610 15.50	0.551 14.00	0.630 16.00	
UA8013	0.610 15.50	0.551 14.00	0.630 16.00	
UA8014	0.610 15.50	0.551 14.00	0.630 16.00	
YA9245	0.486 11.84	0.423 10.75	0.453 11.5	
ZA9336	0.486 11.84	0.423 10.75	0.453 11.5	



SM Coupled Inductors

PFD2015

Part number	Inductance ±20% (µH)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
PFD2015-102MEC	1.0	0.165	380	0.85	1.10	1.30	0.800	1.13
PFD2015-122MEC	1.2	0.175	310	0.80	1.05	1.20	0.750	1.06
PFD2015-182MEC	1.8	0.294	265	0.70	0.85	1.00	0.490	0.690
PFD2015-272MEC	2.7	0.477	220	0.65	0.82	0.88	0.410	0.580
PFD2015-332MEC	3.3	0.670	180	0.57	0.71	0.77	0.370	0.525
PFD2015-472MEC	4.7	1.00	160	0.44	0.55	0.60	0.260	0.370
PFD2015-682MEC	6.8	1.75	130	0.37	0.42	0.47	0.187	0.265
PFD2015-822MEC	8.2	2.50	125	0.35	0.38	0.42	0.150	0.210
PFD2015-103MEC	10	3.40	110	0.30	0.34	0.37	0.130	0.185

PFD3215

Part number	Inductance ±20% (µH)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
PFD3215-391MEC	0.39	0.070	600	2.10	2.30	2.40	0.98	1.39
PFD3215-102MEC	1.0	0.123	400	1.35	1.55	1.65	0.85	1.20
PFD3215-182MEC	1.8	0.250	230	1.00	1.20	1.30	0.60	0.85
PFD3215-222MEC	2.2	0.265	270	0.95	1.05	1.15	0.57	0.81
PFD3215-332MEC	3.3	0.360	190	0.75	0.83	0.90	0.55	0.78
PFD3215-472MEC	4.7	0.450	175	0.65	0.75	0.80	0.51	0.72
PFD3215-682MEC	6.8	0.630	155	0.55	0.65	0.70	0.40	0.57
PFD3215-103MEC	10	1.25	110	0.45	0.50	0.55	0.27	0.38

LPD3015

Part number	Inductance ±20% (µH)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
LPD3015-391MRC	0.39	0.036	289	3.2	3.3	3.4	1.45	2.05
LPD3015-561MRC	0.56	0.040	235	2.7	2.8	2.8	1.37	1.94
LPD3015-102MRC	1.0	0.065	160	2.0	2.1	2.2	1.08	1.52
LPD3015-152MRC	1.5	0.102	140	1.6	1.7	1.8	0.86	1.20
LPD3015-182MRC	1.8	0.137	135	1.5	1.6	1.6	0.78	1.10
LPD3015-222MRC	2.2	0.150	110	1.5	1.6	1.6	0.75	1.05
LPD3015-332MRC	3.3	0.168	90	1.0	1.1	1.2	0.67	0.94
LPD3015-472MRC	4.7	0.252	79	0.86	0.87	0.88	0.54	0.76
LPD3015-682MRC	6.8	0.311	58	0.77	0.78	0.79	0.49	0.69
LPD3015-103MRC	10	0.520	48	0.58	0.59	0.60	0.38	0.53
LPD3015-153MRC	15	0.710	35	0.49	0.50	0.51	0.32	0.46
LPD3015-183MRC	18	0.775	33	0.46	0.47	0.48	0.31	0.44
LPD3015-223MRC	22	0.945	30	0.42	0.43	0.44	0.28	0.40
LPD3015-333MRC	33	1.42	23	0.34	0.35	0.36	0.23	0.32
LPD3015-473MRC	47	2.02	17	0.28	0.29	0.30	0.19	0.27
LPD3015-683MRC	68	3.06	14	0.24	0.25	0.26	0.16	0.22
LPD3015-104MRC	100	4.27	11	0.20	0.21	0.22	0.13	0.19
LPD3015-124MRC	120	4.64	9.0	0.19	0.20	0.20	0.13	0.18
LPD3015-154MRC	150	6.20	8.0	0.16	0.17	0.18	0.11	0.16
LPD3015-184MRC	180	8.66	7.5	0.15	0.16	0.17	0.10	0.14
LPD3015-224MRC	220	9.28	6.0	0.13	0.14	0.15	0.09	0.13
LPD3015-334MRC	330	13.85	5.0	0.11	0.12	0.12	0.07	0.10

LPD4012

Part number	Inductance ±20% (µH)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
LPD4012-331NRC	0.33±30%	0.021	255	5.2	5.4	5.6	1.87	2.65
LPD4012-561NRC	0.56±30%	0.042	185	3.7	3.8	3.9	1.30	1.84
LPD4012-821NRC	0.82±30%	0.050	130	3.2	3.3	3.4	1.21	1.72
LPD4012-152NRC	1.5±30%	0.093	86	2.50	2.81	2.91	1.15	1.62
LPD4012-222NRC	2.2±30%	0.118	70	2.30	2.40	2.50	0.95	1.35
LPD4012-332NRC	3.3±30%	0.160	48	1.80	1.90	2.00	0.75	1.06
LPD4012-472MRC	4.7±20%	0.250	39	1.70	1.80	1.90	0.65	0.92
LPD4012-562MRC	5.6±20%	0.560	32	1.60	1.70	1.80	0.55	0.78
LPD4012-682MRC	6.8±20%	0.265	31	1.20	1.52	1.63	0.60	0.86
LPD4012-822MRC	8.2±20%	0.300	29	1.10	1.20	1.30	0.55	0.78
LPD4012-103MRC	10±20%	0.375	25	0.98	1.00	1.10	0.50	0.71
LPD4012-153MRC	15±20%	0.570	21	0.90	0.92	0.93	0.43	0.60
LPD4012-223MRC	22±20%	0.815	15	0.70	0.82	0.84	0.34	0.48
LPD4012-333MRC	33±20%	0.915	12	0.37	0.57	0.58	0.31	0.44
LPD4012-473MRC	47±20%	1.26	8.8	0.33	0.39	0.40	0.28	0.39
LPD4012-683MRC	68±20%	1.62	7.8	0.27	0.36	0.37	0.25	0.36
LPD4012-823MRC	82±20%	1.83	7.3	0.27	0.27	0.29	0.23	0.31
LPD4012-104MRC	100±20%	2.38	6.1	0.22	0.28	0.29	0.20	0.27
LPD4012-124MRC	120±20%	2.77	5.3	0.21	0.26	0.27	0.19	0.27
LPD4012-154MRC	150±20%	3.45	4.6	0.18	0.26	0.27	0.17	0.23
LPD4012-184MRC	180±20%	4.38	4.1	0.16	0.21	0.23	0.14	0.18
LPD4012-224MRC	220±20%	5.62	3.3	0.15	0.16	0.17	0.12	0.17
LPD4012-334MRC	330±20%	8.50	2.8	0.13	0.16	0.16	0.10	0.14

LPD5010

Part number	Inductance ±20% (µH)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
LPD5010-681MRC	0.68	0.035	191	2.6	2.7	2.8	1.95	2.76
LPD5010-102MRC	1.0	0.050	150	2.1	2.1	2.2	1.50	2.12
LPD5010-152MRC	1.5	0.075	134	1.7	1.8	1.8	1.20	1.70
LPD5010-222MRC	2.2	0.100	108	1.5	1.6	1.6	1.10	1.56
LPD5010-332MRC	3.2	0.135	83	1.2	1.3	1.3	0.95	1.34
LPD5010-472MRC	4.7	0.200	68	0.98	1.0	1.1	0.75	1.06
LPD5010-562MRC	5.6	0.225	60	0.90	0.93	0.94	0.70	0.99
LPD5010-682MRC	6.8	0.265	55	0.83	0.86	0.87	0.60	0.85
LPD5010-822MRC	8.2	0.350	50	0.74	0.77	0.78	0.50	0.71
LPD5010-103MRC	10	0.390	46	0.67	0.69	0.70	0.50	0.71
LPD5010-153MRC	15	0.595	33	0.53	0.55	0.56	0.42	0.59
LPD5010-223MRC	22	0.790	26	0.45	0.47	0.48	0.35	0.49
LPD5010-333MRC	33	1.250	23	0.37	0.38	0.39	0.30	0.42
LPD5010-473MRC	47	1.740	17.0	0.31	0.32	0.33	0.25	0.35
LPD5010-683MRC	68	2.550	14.9	0.25	0.26	0.27	0.19	0.26
LPD5010-104MRC	100	4.000	11.2	0.21	0.22	0.22	0.15	0.21
LPD5010-154MRC	150	5.850	9.9	0.17	0.17	0.18	0.12	0.16
LPD5010-224MRC	220	7.600	8.05	0.14	0.15	0.15	0.11	0.15



Q200
85°

LPD5030



Part number	Inductance (μ H)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
LPD5030-102MRC	10 \pm 30%	0.021	153	4.30	4.49	4.67	2.20	3.11
LPD5030-152MRC	15 \pm 20%	0.024	118	3.90	4.20	4.30	2.05	2.90
LPD5030-222MRC	22 \pm 20%	0.034	87.0	2.80	2.98	3.07	1.95	2.76
LPD5030-332MRC	3.2 \pm 20%	0.039	61.0	2.50	2.70	2.80	1.70	2.40
LPD5030-472MRC	4.7 \pm 20%	0.056	49.0	2.10	2.20	2.20	1.40	1.98
LPD5030-562MRC	5.6 \pm 20%	0.063	44.0	1.80	1.80	1.89	1.35	1.91
LPD5030-682MRC	6.8 \pm 20%	0.080	40.0	1.40	1.48	1.48	1.20	1.70
LPD5030-103MRC	10 \pm 20%	0.105	28.0	1.20	1.20	1.20	1.05	1.48
LPD5030-153MRC	15 \pm 20%	0.149	23.0	1.00	1.17	1.17	0.85	1.20
LPD5030-223MRC	22 \pm 20%	0.226	17.0	0.89	0.98	0.98	0.70	0.99
LPD5030-333MRC	33 \pm 20%	0.283	16.0	0.63	0.77	0.78	0.60	0.85
LPD5030-473MRC	47 \pm 20%	0.403	12.0	0.59	0.63	0.65	0.50	0.71
LPD5030-683MRC	68 \pm 20%	0.565	9.00	0.50	0.54	0.55	0.43	0.61
LPD5030-104MRC	100 \pm 20%	0.895	8.44	0.47	0.54	0.56	0.33	0.47
LPD5030-154MRC	150 \pm 20%	1.215	6.72	0.38	0.43	0.45	0.28	0.40
LPD5030-224MRC	220 \pm 20%	1.650	5.53	0.31	0.35	0.36	0.24	0.34
LPD5030-334MRC	330 \pm 20%	2.680	4.17	0.25	0.25	0.32	0.18	0.25
LPD5030-474MRC	470 \pm 20%	3.755	3.52	0.21	0.24	0.26	0.15	0.21
LPD5030-684MRC	680 \pm 20%	5.400	2.93	0.17	0.2	0.21	0.13	0.18
LPD5030-105MRC	1000 \pm 20%	8.250	2.33	0.15	0.17	0.17	0.10	0.14

LPD5030V High Isolation



Part number	Inductance \pm 20% (μ H)	DCRmax (Ohms)	SRFtyp (MHz)	K typ	LeakL typ (μ H)	Isat(A) 30% drop	Irms(A)	
							both windings	one winding
LPD5030V-472MRC	4.7	0.322	55.0	0.97	0.109	1.90	0.65	0.92
LPD5030V-682MRC	6.8	0.395	49.9	0.97	0.109	1.55	0.59	0.83
LPD5030V-103MRC	10	0.490	37.1	0.97	0.130	1.30	0.54	0.76
LPD5030V-333MRC	33	0.895	19.2	0.98	0.195	0.67	0.43	0.61
LPD5030V-473MRC	47	1.40	16.0	0.98	0.300	0.50	0.35	0.50
LPD5030V-154MRC	150	3.82	8.1	0.98	0.456	0.31	0.18	0.25
LPD5030V-224MRC	220	5.25	6.5	>0.99	0.541	0.24	0.16	0.22

Q200
125°

LPD6235



Part number	Inductance \pm 20% (μ H)	DCRmax (Ohms)	SRFtyp (MHz)	Isat(A)			Irms(A)	
				10% drop	20% drop	30% drop	both windings	one winding
LPD6235-682MRC	6.8	0.060	31	2.80	3.00	3.12	1.40	1.98
LPD6235-103MRC	10	0.079	27	2.50	2.70	2.80	1.30	1.83
LPD6235-223MRC	22	0.150	15	1.50	1.67	1.73	0.85	1.20
LPD6235-473MRC	47	0.315	9.7	0.90	0.98	0.99	0.60	0.85
LPD6235-104MRC	100	0.60	7.0	0.62	0.72	0.74	0.40	0.56
LPD6235-474MRC	470	1.75	3.0	0.18	0.22	0.23	0.25	0.35
LPD6235-105MRC	1000	3.50	1.9	0.12	0.14	0.15	0.15	0.21
LPD6235-155MRC	1500	5.40	1.5	0.12	0.12	0.13	0.14	0.20
LPD6235-205MRC	2000	8.00	1.3	0.08	0.11	0.12	0.11	0.16


Q200
85°

LPD8035V High Isolation




Part number	Inductance \pm 20% (μ H)	DCR max (Ohms)	SRF typ (MHz)	K typ	Leak L max	Isat(A) 30% drop	Irms(A)	
							both windings	one winding
LPD8035V-472MRC	4.7	0.140	45.6	0.97	0.150	2.7	1.15	1.62
LPD8035V-562MRC	5.6	0.150	41.4	0.97	0.180	2.5	1.03	1.45
LPD8035V-822MRC	8.2	0.190	31.1	0.97	0.210	2.0	0.95	1.35
LPD8035V-103MRC	10	0.185	28.8	0.98	0.250	2.0	0.92	1.30
LPD8035V-223MRC	22	0.359	18.0	0.98	0.305	1.3	0.63	0.89
LPD8035V-333MRC	33	0.660	13.2	0.99	0.350	1.0	0.52	0.73
LPD8035V-473MRC	47	0.696	12.4	0.99	0.410	0.54	0.47	0.67
LPD8035V-563MRC	56	0.784	11.5	0.99	0.440	0.49	0.42	0.60
LPD8035V-683MRC	68	0.890	10.9	0.99	0.475	0.45	0.40	0.57
LPD8035V-823MRC	82	0.98	10.0	0.99	0.510	0.42	0.38	0.54
LPD8035V-104MRC	100	1.45	9.55	0.99	0.565	0.39	0.31	0.44
LPD8035V-124MRC	120	1.68	8.67	0.99	0.775	0.35	0.30	0.42
LPD8035V-154MRC	150	1.90	7.60	0.99	0.820	0.31	0.28	0.39

LPD3015, LPD4012, LPD5010, LPD6235

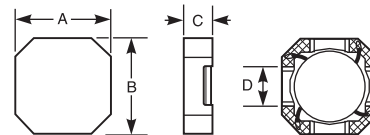

PFD2015, PFD3215



Dimensions (inches mm)

Series	A max	B max	C	D
LPD3015	0.121 3.07	0.121 3.07	0.059 1.5	0.039 0.99
LPD4012	0.158 4.02	0.158 4.02	0.0473 1.2	0.060 1.52
LPD5010	0.189 4.80	0.189 4.80	0.039 1.0	0.060 1.52
LPD5030	0.189 4.80	0.189 4.80	0.118 3.0	0.060 1.52
LPD5030V	0.192 4.876	0.192 4.876	0.118 3.0	0.060 1.52
LPD6235	0.239 6.08	0.239 6.08	0.138 3.5	0.079 2.00
PFD2015	0.090 2.29	0.060 1.52	0.059 1.5	
PFD3215	0.131 3.32	0.092 2.33	0.059 1.5	

0200
85°

MSD7342



NEW!

Part number	Inductance ±20%(μH)	DCRmax (Ohms)	SRF typ (MHz)	K typ	LeakL typ(μH)	Isat(A) 30%drop	Irms(A)	
							both windings	one winding
MSD7342-252MLC	2.5	0.033	55	0.97	0.14	6.3	2.17	3.06
MSD7342-332MLC	3.3	0.037	43	0.99	0.09	5.4	2.05	2.89
MSD7342-472MLC	4.7	0.051	35	0.99	0.11	4.6	1.74	2.46
MSD7342-562MLC	5.6	0.063	32	0.99	0.09	4.2	1.57	2.22
MSD7342-682MLC	6.8	0.070	30	0.99	0.14	3.9	1.49	2.10
MSD7342-822MLC	8.2	0.075	27	0.98	0.25	3.5	1.44	2.03
MSD7342-103MLC	10	0.100	22	0.98	0.30	3.0	1.24	1.76
MSD7342-123MLC	12	0.120	20	0.98	0.36	2.7	1.14	1.61
MSD7342-153MLC	15	0.130	18	0.98	0.49	2.4	1.09	1.54
MSD7342-183MLC	18	0.170	15	>0.99	0.16	2.3	0.95	1.35
MSD7342-223MLC	22	0.220	13.5	>0.99	0.20	2.1	0.84	1.19
MSD7342-273MLC	27	0.250	12.0	>0.99	0.20	1.9	0.79	1.11
MSD7342-333MLC	33	0.270	11.0	>0.99	0.15	1.7	0.76	1.07
MSD7342-393MLC	39	0.380	10.0	0.99	0.70	1.5	0.64	0.90
MSD7342-473MLC	47	0.420	9.5	>0.99	0.30	1.4	0.61	0.86
MSD7342-563MLC	56	0.460	8.7	>0.99	0.51	1.3	0.58	0.82
MSD7342-683MLC	68	0.600	7.3	>0.99	0.51	1.2	0.51	0.72
MSD7342-823MLC	82	0.680	6.2	0.99	1.17	1.1	0.48	0.67
MSD7342-104MLC	100	0.770	5.5	>0.99	0.96	0.98	0.45	0.63
MSD7342-124MLC	120	1.03	4.5	>0.99	0.61	0.90	0.39	0.55
MSD7342-154MLC	150	1.35	4.0	>0.99	0.54	0.80	0.34	0.48
MSD7342-184MLC	180	1.52	3.8	>0.99	0.75	0.73	0.32	0.45
MSD7342-224MLC	220	1.72	3.5	>0.99	1.43	0.66	0.30	0.42
MSD7342-274MLC	270	2.41	3.3	>0.99	1.56	0.60	0.25	0.36
MSD7342-334MLC	330	2.70	3.0	>0.99	1.65	0.54	0.24	0.34
MSD7342-394MLC	390	3.05	2.8	0.99	4.73	0.50	0.23	0.32
MSD7342-474MLC	470	4.00	2.6	0.99	5.50	0.46	0.20	0.28
MSD7342-564MLC	560	4.43	2.5	>0.99	4.85	0.42	0.19	0.26
MSD7342-684MLC	680	5.00	2.3	0.99	7.59	0.38	0.18	0.25
MSD7342-824MLC	820	6.80	2.2	>0.99	8.01	0.35	0.15	0.21
MSD7342-105MLC	1000	7.80	2.0	>0.99	8.69	0.31	0.14	0.20

0200
125°

MSD1260H High Isolation†



NEW!

Part number	Inductance (μH)	DCR max (Ohms)	SRF typ (MHz)	K typ	Leak L typ	Isat (A)			Irms (A)	
						10% drop	20% drop	30% drop	both windings	one winding
MSD1260H-222MED	22±20%	0.017	57	0.97	0.14	10.1	11.8	13.0	4.5	6.3
MSD1260H-332MED	33±20%	0.020	48	0.97	0.17	8.3	9.6	10.7	4.1	5.7
MSD1260H-472MED	47±20%	0.023	40	0.98	0.18	6.9	8.1	8.9	3.8	5.3
MSD1260H-562MED	56±20%	0.030	36	0.98	0.18	6.3	7.4	8.2	3.5	4.8
MSD1260H-682MED	6.8±20%	0.033	31	0.98	0.19	5.7	6.7	7.4	3.1	4.3
MSD1260H-822MED	82±20%	0.036	28	0.98	0.20	5.2	6.1	6.8	2.9	4.0
MSD1260H-103MED	10±20%	0.045	24	0.98	0.22	4.7	5.5	6.1	2.6	3.6
MSD1260H-123MED	12±20%	0.050	22	0.98	0.23	4.3	5.0	5.6	2.5	3.4
MSD1260H-153MED	15±20%	0.059	19	0.98	0.25	3.9	4.5	5.0	2.3	3.2
MSD1260H-183MED	18±20%	0.071	17	0.98	0.27	3.5	4.1	4.6	2.1	2.9
MSD1260H-223MED	22±20%	0.083	15	0.98	0.29	3.2	3.7	4.1	1.9	2.6
MSD1260H-273MED	27±20%	0.093	13	0.98	0.29	2.9	3.4	3.7	1.8	2.5
MSD1260H-333MED	33±20%	0.118	12	0.98	0.32	2.6	3.0	3.4	1.6	2.2
MSD1260H-393MED	39±20%	0.132	11	0.98	0.34	2.4	2.8	3.1	1.5	2.1
MSD1260H-473MED	47±20%	0.143	10.5	0.98	0.38	2.2	2.5	2.8	1.4	1.9
MSD1260H-563MED	56±20%	0.186	9.5	0.98	0.38	2.0	2.3	2.6	1.3	1.8
MSD1260H-683MED	68±20%	0.209	8.5	0.98	0.45	1.8	2.1	2.3	1.2	1.7
MSD1260H-823MED	82±20%	0.270	7.5	0.98	0.45	1.7	1.9	2.1	1.08	1.5
MSD1260H-104MED	100±20%	0.310	7.0	0.98	0.48	1.5	1.7	1.9	0.95	1.3
MSD1260H-124KED	120±10%	0.345	6.4	0.98	0.50	1.4	1.6	1.8	0.85	1.2
MSD1260H-154KED	150±10%	0.465	5.4	0.98	0.56	1.2	1.5	1.6	0.75	1.1
MSD1260H-184KED	180±10%	0.525	5.0	0.98	0.66	1.1	1.3	1.4	0.65	0.91
MSD1260H-224KED	220±10%	0.680	4.4	0.98	0.88	1.0	1.2	1.3	0.60	0.84
MSD1260H-274KED	270±10%	0.783	4.0	0.98	1.1	0.91	1.1	1.2	0.55	0.77
MSD1260H-334KED	330±10%	0.916	3.6	0.98	1.1	0.83	0.96	1.1	0.52	0.73
MSD1260H-394KED	390±10%	1.155	3.3	0.98	1.1	0.76	0.89	0.98	0.50	0.70
MSD1260H-474KED	470±10%	1.330	3.0	0.98	1.2	0.69	0.81	0.89	0.45	0.63
MSD1260H-564KED	560±10%	1.738	2.8	0.98	1.6	0.63	0.74	0.82	0.40	0.56
MSD1260H-334KED	330±10%	0.916	3.6	0.98	1.1	0.83	0.96	1.1	0.52	0.73
MSD1260H-684KED	680±10%	2.013	2.4	0.98	1.9	0.57	0.67	0.74	0.36	0.50
MSD1260H-824KED	820±10%	2.280	2.3	0.98	2.6	0.52	0.61	0.68	0.32	0.45
MSD1260H-105KED	1000±10%	2.950	2.1	0.98	3.8	0.47	0.55	0.61	0.28	0.39

0200
125°

MSD1038V High Isolation†



NEW!

Part number	Inductance ±20%(μH)	DCRmax (Ohms)	SRF typ (MHz)	K typ	LeakL typ(μH)	Isat(A) 30%drop	Irms(A)	
							both windings	one winding
MSD1038V-103MEC	10	0.108	26.0	≥0.95	0.5	4.7	2.75	3.90
MSD1038V-223MEC	22	0.240	16.5	≥0.96	0.7	3.1	1.30	1.80
MSD1038V-333MEC	33	0.340	13.0	≥0.96	0.8	2.6	1.00	1.45
MSD1038V-473MEC	47	0.460	11.0	≥0.96	0.9	2.2	0.92	1.30
MSD1038V-683MEC	68	0.690	9.0	≥0.96	1.0	1.8	0.78	1.10
MSD1038V-104MEC	100	0.950	7.5	≥0.96	1.2	1.5	0.67	0.95
MSD1038V-124MEC	120	1.150	6.8	≥0.96	1.3	1.3	0.53	0.75
MSD1038V-154MEC	150	1.350	6.0	≥0.96	1.5	1.2	0.46	0.65

0200
125°

MSD1278H†



NEW!

Part number	Inductance (μH)	DCR max (Ohms)	SRF typ (MHz)	K typ	Leak L typ	Isat (A)			Irms (A)	
						10% drop	20% drop	30% drop	both windings	one winding
MSD1278H-472MED	47±20%	0.022	30	0.98	0.35	10.2	11.6	12.7	5.11	7.14
MSD1278H-652MED	65±20%	0.025	26	0.98	0.38	9.2	10.4	11.5	4.80	6.74
MSD1278H-822MED	82±20%	0.030	23	0.98	0.41	8.3	9.3	10.2	4.32	6.15
MSD1278H-103MED	10±20%	0.036	20	0.98	0.46	7.1	8.0	8.8	4.01	5.56
MSD1278H-123MED	12±20%	0.037	18	0.98	0.53	6.6	7.5	8.3	3.87	5.47
MSD1278H-153MED	15±20%	0.048	16	0.99	0.55	6.0	6.8	7.5	3.42	4.77
MSD1278H-183MED	18±20%	0.051	14	0.99	0.64	5.5	6.3	6.8	3.28	4.67
MSD1278H-223MED	22±20%	0.068	12	0.99	0.72	5.1	5.6	6.2	2.88	4.06
MSD1278H-273MED	27±20%	0.078	11	0.99	0.80	4.6	5.1	5.6	2.70	3.91
MSD1278H-333MED	33±20%	0.086	10	0.99	0.85	4.2	4.6	5.1	2.54	3.66
MSD1278H-393MED	39±20%	0.110	8.7	0.99	1.0	3.8	4.3	4.7	2.22	3.12
MSD1278H-473MED	47±20%	0.127	8.1	0.99	1.1	3.6	3.9	4.4	1.47	2.94
MSD1278H-563MED	56±20%	0.140	7.5	0.99	1.3	3.3	3.6	4.0	1.98	2.75
MSD1278H-683MED	68±20%	0.155	7.0	0.99	1.4	3.0	3.2	3.6	1.91	2.65
MSD1278H-823MED	82±20%	0.206	6.3	0.99	1.6	2.7	2.9	3.3	1.63	2.34
MSD1278H-104KED	100±10%	0.230	5.5	>0.99	1.8	2.4	2.6	3.0	1.53	2.25
MSD1278H-124KED	120±10%	0.307	4.8	0.99	2.0	2.2	2.4	2.7	1.33	1.87
MSD1278H-154KED	150±10%	0.355	4.4	>0.99	2.2	2.0	2.2	2.4	1.26	1.79
MSD1278H-184KED	180±10%	0.470	4.2	>0.99	2.5	1.8	2.0	2.2	1.07	1.54
MSD1278H-224KED	220±10%	0.540	3.8	>0.99	2.8	1.6	1.8	2.0	1.00	1.41
MSD1278H-274KED	270±10%	0.735	3.2	>0.99	3.1	1.5	1.6	1.8	0.87	1.25
MSD1278H-334KED	330±10%	0.815	2.8	0.99	3.4	1.3	1.4	1.6	0.83	1.16
MSD1278H-394KED	390±10%	0.910	2.7	>0.99	3.6	1.2	1.3	1.5	0.79	1.12
MSD1278H-474KED	470±10%	1.185	2.3	>0.99	4.2	1.1	1.2	1.4	0.68	0.95
MSD1278H-564KED	560±10%	1.350	2.2	>0.99	4.6	1.0	1.1	1.3	0.64	0.90
MSD1278H-684KED	680±10%	1.780	1.8	>0.99	5.0	0.9	1.0	1.1	0.61	0.79
MSD1278H-824KED	820±10%	2.000	1.7	>0.99	5.5	0.82	0.92	1.0	0.51	0.74
MSD1278H-105KED	1000±10%	2.350	1.6	>0.99	5.8	0.75	0.83	0.92	0.49	0.69

0200
125°

MSD1048H†



NEW!

Part number	Inductance ±20%(μH)	DCRmax (Ohms)	SRF typ (MHz)	K typ	LeakL typ(μH)	Isat(A) 30%drop	Irms(A)	
							both windings	one winding
MSD1048H-222MED	22±30%	0.022	55	>0.95	0.30	9.1	3.20	4.60
MSD1048H-103MED	10±20%	0.055						

MSD1583



Part number	Inductance (µH)	DCRmax (Ohms)	SRF typ (MHz)	K typ	LeakL typ(µH)	Isat(A) 30%drop	Irms(A)	
							both windings	one winding
MSD1583-103MED	10 ±20%	0.016	16.0	0.98	0.33	14.5	3.68	5.20
MSD1583-123MED	12 ±20%	0.019	14.5	0.98	0.36	13.2	3.54	5.00
MSD1583-153MED	15 ±20%	0.023	12.0	0.99	0.38	11.8	3.18	4.50
MSD1583-183MED	18 ±20%	0.024	11.5	0.99	0.40	10.8	3.04	4.30
MSD1583-223MED	22 ±20%	0.033	10.5	0.99	0.40	9.80	2.44	3.45
MSD1583-333MED	33 ±20%	0.048	8.0	0.99	0.54	8.00	2.16	3.05
MSD1583-473MED	47 ±20%	0.058	7.1	0.99	0.46	6.70	1.98	2.80
MSD1583-683MED	68 ±20%	0.083	5.7	0.99	0.79	5.50	1.56	2.20
MSD1583-104KED	100 ±10%	0.130	5.1	>0.99	0.59	4.60	1.24	1.75
MSD1583-154KED	150 ±10%	0.190	3.7	>0.99	0.70	3.75	1.06	1.50
MSD1583-224KED	220 ±10%	0.230	3.2	>0.99	0.89	3.10	0.92	1.30
MSD1583-474KED	470 ±10%	0.520	2.2	>0.99	1.16	2.12	0.65	0.92
MSD1583-105KED	1000 ±10%	1.200	1.6	>0.99	2.02	1.45	0.42	0.60

MSD1514



Part number	Inductance (µH)	DCRmax (Ohms)	SRF typ (MHz)	K typ	LeakL typ(µH)	Isat(A) 30%drop	Irms(A)	
							both windings	one winding
MSD1514-252MED	2.5±20%	0.012	34.0	0.97	0.20	30.5	6.0	7.8
MSD1514-472MED	4.7±20%	0.014	25.0	0.98	0.20	23.7	5.4	7.6
MSD1514-103MED	10±20%	0.018	16.5	0.99	0.40	16.2	4.8	6.8
MSD1514-123MED	12±20%	0.022	14.5	0.99	0.40	14.8	4.7	6.6
MSD1514-153MED	15±20%	0.028	11.0	>0.99	0.42	13.3	4.1	5.8
MSD1514-223MED	22±20%	0.036	10.0	>0.99	0.45	11.0	3.6	5.1
MSD1514-273MED	27±20%	0.039	8.50	>0.99	0.45	9.90	3.5	4.7
MSD1514-333MED	33±20%	0.052	7.20	>0.99	0.45	9.00	3.0	3.9
MSD1514-473MED	47±20%	0.075	5.60	>0.99	0.55	7.50	2.6	3.45
MSD1514-683MED	68±20%	0.090	5.20	>0.99	0.55	6.20	2.2	3.20
MSD1514-104KED	100±10%	0.126	3.80	>0.99	0.55	5.15	2.0	2.50
MSD1514-224KED	220±10%	0.287	2.30	>0.99	0.70	3.50	1.3	1.70
MSD1514-334KED	330±10%	0.367	2.10	>0.99	0.80	2.83	1.2	1.55
MSD1514-474KED	470±10%	0.550	1.65	>0.99	1.2	2.40	0.92	1.30
MSD1514-105KED	1000±10%	1.25	1.10	>0.99	2.0	1.63	0.66	0.77

MSC1278




Part number	Inductance (µH)	DCR max (Ohms)	SRF typ (MHz)	K typ	Leak L typ	Isat (A)			Irms (A)	
						10% drop	20% drop	30% drop	both windings	one winding
MSC1278-103MLD	10±20%	0.058	20	0.80	2.75	8.80	10.0	10.66	2.56	3.62
MSC1278-223KLD	22±10%	0.096	12	0.82	5.85	6.00	6.80	7.26	1.99	2.81
MSC1278-333KLD	33±10%	0.15	9.5	0.85	10.1	5.50	6.10	6.52	1.59	2.25
MSC1278-473KLD	47±10%	0.18	7.8	0.83	14.5	3.70	4.34	4.60	1.45	2.05

LPH8045



Part number	Inductance ±20% (µH)	DCR(Ohms)		SRF typ (MHz)	Isat (A)			Irms (A)	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
LPH8045-682MRC	6.8	0.208	0.223	31.0	3.30	3.72	3.90	0.95	1.30
LPH8045-822MRC	8.2	0.228	0.250	27.4	3.00	3.40	3.65	0.92	1.26
LPH8045-103MRC	10	0.241	0.261	25.0	2.65	3.10	3.35	0.90	1.21
LPH8045-153MRC	15	0.306	0.331	18.9	2.30	2.65	2.90	0.80	1.09
LPH8045-223MRC	22	0.390	0.395	15.0	1.70	1.90	2.10	0.65	0.89


LPH8045

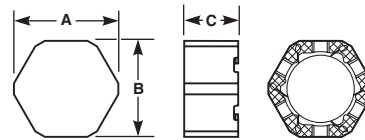

Dimensions (inches mm)

Series	A max	B max	C
LPH8045	0.350 8,90	0.318 8,05	0.185 4,70

MSC1278, MSD12xx, MSD15xx, MSD7342, MSD1038V, MSD1048H



Dimensions (inches mm)

Series	A max	B max	C	D	E	F	G
MSD1038V	0.405 10,3	0.405 10,3	0.118 3,0	0.079 2,0	0.228 5,8	0.158 4,0	0.039 1,0
MSD1048H	0.406 10,3	0.406 10,3	0.118 3,0	0.079 2,0	0.228 5,8	0.197 5,0	0.039 1,0
MSC1278	0.484 12,3	0.484 12,3	0.197 5,0	0.138 3,5	0.197 5,0	0.317 8,05	0.059 1,5
MSD1260H	0.484 12,3	0.484 12,3	0.244 6,2	0.138 3,5	0.197 5,0	0.197 5,0	0.059 1,5
MSD1278H	0.484 12,3	0.484 12,3	0.197 5,0	0.138 3,5	0.197 5,0	0.317 8,05	0.059 1,5
MSD1514	0.787 15,5	0.787 15,5	0.220 5,6	0.130 3,3	0.331 8,2	0.559 14,2	0.074 1,9
MSD1583	0.610 15,5	0.610 15,5	0.220 5,6	0.126 3,2	0.331 8,4	0.339 8,6	0.075 1,9
MSD7342	0.295 7,5	0.295 7,5	0.091 2,3	0.063 1,6	0.150 3,8	0.181 4,6	0.028 0,7



Common Mode EMI/RFI Filters

Coilcraft offers EMI/RFI common mode chokes for the suppression of radiated and/or conducted EMI. Data/signal line filters such as our **USB** Family dramatically suppress common mode noise with minimal impact on high-speed differential signals. The **PFD**, **LPD** and **MSD** parts can be used to attenuate common-mode or differential-mode noise in both data and power line applications. Power line chokes like the **CMT** and **BU** Series reduce common mode noise from AC power.

Data Line Common Mode EMI Chokes

The **CJ5100**, **CQ7584**, and **CR7856** surface mount data line common mode chokes are designed to attenuate up to 100 MHz common mode noise. The **PDLF** Series can reduce noise by a factor of 32 from 15 MHz to 300 MHz and are available in 2, 3 and 4 line versions. The **PTRF** Series is optimized for FCC and ITU-T (formerly CCITT) requirements. These parts provide 15 to 25 dB attenuation, greater than 1000 Ohms impedance and 1500 V isolation between windings. **M2022** can suppress common mode noise up to 500 MHz in a compact 1812 package.

CJ5100, CQ7584, CR7856



Part number	Common mode peak impedance max (kOhms)	Cutoff frequency (MHz)	Inductance (mH)		DCR max (Ohms)	Isolation (Vrms)	I _{rms} (mA)
			nom	min			
CJ5100-AL	4.49 @ 9.9 MHz	920	0.47	0.329	0.24	500	850
CQ7584-AL	6.81 @ 4.1 MHz	760	2.20	1.54	0.40	500	650
CR7856-AL	11.11 @ 1.9 MHz	460	4.70	3.29	1.3	500	470

PTRF



Part number	Lines	Common mode peak impedance (kOhms)	Cutoff frequency (MHz)	Inductance min (μH)	DCR max (mOhms)	Isolation (Vrms)	Current (mA)
PTRF4000LC	2	0.851 @ 12 MHz	41	35	135	1500	500

DFT4532



NEW!

Part number	Common mode impedance max (kOhms)	Cutoff frequency (MHz)	Inductance (mH)		DCR max (Ohms)	Isolation (Vrms)	I _{rms} (mA)
			nom	min			
DFT4532-513BLC	2.01 @ 61 MHz	670	0.051	0.0357	0.320	250	370
DFT4532-513SLC	1.92 @ 99 MHz	28	0.051	0.0357	0.320	250	370
DFT4532-104BLC	0.64 @ 9.7 MHz	900	0.100	0.070	0.200	250	500
DFT4532-224BLC	1.40 @ 13 MHz	650	0.220	0.154	0.270	250	400
DFT4532-334BLC	1.96 @ 9.6 MHz	520	0.330	0.231	0.320	250	370
DFT4532-474BLC	3.04 @ 9.6 MHz	490	0.470	0.329	0.380	250	350

M2022





Part number	Common mode impedance max (kOhms)	Cutoff frequency (MHz)	Inductance min (μH)	DCR max (mOhms)	Isolation (Vrms)	Current (mA)
M2022-ALPLC	40.0 @ 160 MHz	120	4.0 ±10%	990	50	500
M2022-ASLC	32.0 @ 66 MHz	140	11.5	850	50	500

DFT7160




Part number	Common mode impedance max (kOhms)	Cutoff frequency (MHz)	Inductance (mH)		DCR max (Ohms)	Isolation (Vrms)	I _{rms} (mA)
			nom	min			
DFT7160-513SLC	3.97 @ 69 MHz	25	0.0357	0.300	250	700	700
DFT7160-513BLC	4.00 @ 55 MHz	570	0.0357	0.300	250	700	700
DFT7160-474BLC	2.42 @ 7.5 MHz	410	0.329	0.210	250	1000	900
DFT7160-105BLC	3.12 @ 6.0 MHz	420	0.700	0.210	250	900	900
DFT7160-225BLC	6.66 @ 4.7 MHz	670	1.54	0.500	250	600	600
DFT7160-475BLC	13.47 @ 3.0 MHz	440	3.29	0.600	250	500	500

CJ5100, CQ7584, CR7856, DFT7160



PDLF / PTRF Series




PDLF




Part number	Lines	Common mode peak impedance (kOhms)	Cutoff frequency (GHz)	Inductance min (μH)	DCR max (mOhms)	Isolation (Vrms)	Current (mA)
PDLF4500LC	4	0.848 @ 200 MHz	0.88	5.0	200	300	500
PDLF3000LC	3	0.901 @ 280 MHz	1.4	5.0	250	300	100
PDLF3500LC	3	0.910 @ 210 MHz	1.1	5.0	200	300	500
PDLF2000LC	2	0.958 @ 280 MHz	1.3	5.0	250	300	100
PDLF2500LC	2	0.929 @ 250 MHz	1.2	5.0	200	300	500


DFT4532

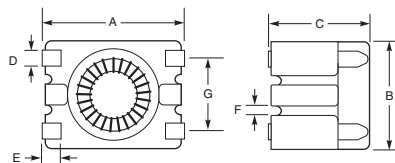

M2022 Series



1812CAN



1210CAN



NEW!

Part number	Inductance ±30% (μH)	DCR max (Ohms)	Isolation (Vrms)	I _{rms} (mA)
1210CAN-223NRC	22	0.60	250	300
1210CAN-513NRC	51	1.35	250	200
1210CAN-104NRC	100	3.70	250	100

1812CAN



Part number	Inductance ±30% (μH)	DCR max (Ohms)	Isolation (Vrms)	I _{rms} (mA)
1812CAN-223NRC	22	0.40	250	400
1812CAN-513NRC	51	0.59	250	300
1812CAN-104NRC	100	1.0	250	260

Dimensions (inches mm)

Series	A max	B max	C max	D ref	E typ	F	G
1812CAN	0.195-4.95	0.125-3.18	0.118-3.0	0.028-0.71			
CJ5100-AL	0.370-9.4	0.236-6.0	0.189-4.8				
CQ7584-AL	0.370-9.4	0.220-5.6	0.189-4.8				
CR7856-AL	0.370-9.4	0.217-5.5	0.193-4.9				
DFT4532	0.123-3.095	0.134-3.4	0.126-3.4	0.016-0.40	0.020-0.50	0.012-0.30	0.087-2.20
DFT7160	0.370-9.4	0.220-5.6	0.193-4.9				
M2022-ALC	0.195-4.95	0.150-3.81	0.135-3.43	0.030-0.76	0.040-1.02		0.070-1.78
M2022-ALPLC	0.195-4.95	0.150-3.81	0.079-2.01	0.030-0.76	0.040-1.02		0.070-1.78
M2022-ASLC	0.231-5.87	0.196-4.98	0.150-3.81	0.030-0.76	0.040-1.02		0.107-2.72
PDLF	0.329-8.35	0.223-5.65	0.146-3.70	0.020-0.50	0.0395-1.00	0.050-1.27	
PTRF	0.329-8.35	0.223-5.65	0.146-3.70	0.020-0.50	0.395-1.00	0.050-1.27	



High-Speed Data Line EMI Chokes


Coilcraft's RA6870, CM1394 and USB Families of high-speed data line common mode chokes effectively reduce common mode noise in high-speed interfaces like USB 2.0, USB 3.1 Gen 1, HDBaseT™, MOST® bus, etc. They maintain excellent signal integrity for high-speed communications with the -3dB differential mode cutoff frequency up to 6.5 GHz. Most provide greater than 30 dB common mode attenuation at 500 MHz and 25 dB in the GHz band.

0603USB

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			100 MHz	500 MHz	1GHz				
0603USB-251MLC	>0.10 @ >3.0 GHz	3.8	1.31	3.16	8.45	18	0.077	250	500
0603USB-601MLC	>0.18 @ >3.0 GHz	3.4	3.00	6.88	13.27	37	0.109	250	500
0603USB-951MLC	0.30 @ 2.6 GHz	2.8	4.62	9.75	16.06	63	0.142	250	500
0603USB-142MLC	0.42 @ 1.9 GHz	1.9	6.85	12.80	18.16	98	0.174	250	500
0603USB-222MLC	0.71 @ 2.9 GHz	0.96	9.14	16.53	20.29	150	0.209	250	500

0603USB, 0805USB, 0805USBF, 0805USBN, 1206USB, RA6870

CM1394



0805USB

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
0805USB-421MLC	>0.22 @ >3.0 GHz	3.5	1.1	2.3	8.4	23	0.12	250	500
0805USB-901MLC	>0.29 @ >3.0 GHz	2.5	1.4	4.2	16.9	47	0.17	250	500
0805USB-172MLC	0.64 @ 1.8 GHz	1.8	2.3	6.7	22.0	84	0.25	250	500
0805USB-262MLC	0.82 @ 1.8 GHz	1.5	3.0	8.6	27.8	147	0.26	250	500
0805USB-372MLC	1.06 @ 1.4 GHz	0.82	4.5	11.9	34.3	189	0.32	250	500
0805USB-502MLC	1.42 @ 1.1 GHz	0.70	4.9	14.5	31.3	273	0.37	250	500
0805USB-672MLC	1.75 @ 0.93 GHz	0.46	8.4	16.6	30.0	322	0.45	250	500
0805USB-902MLC	2.06 @ 0.90 GHz	0.47	8.7	18.7	30.5	413	0.65	250	400

Dimensions (inches mm)

Series	A max	B max	C max
0603USB	0.063 1.60	0.033 0.84	0.046 1.17
0805USB	0.084 2.13	0.054 1.37	0.065 1.65
0805USBF	0.084 2.13	0.054 1.37	0.055 1.40
0805USBN	0.087 2.20	0.055 1.40	0.037 0.93
1206USB	0.130 3.30	0.067 1.70	0.076 1.93
CM1394	0.231 5.87	0.196 4.98	0.150 3.81
RA6870	0.084 2.13	0.054 1.37	0.065 1.65

Q200
125°

0805USBF

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
0805USBF-421MRC	>0.14 @ >3.0 GHz	6.6	0.5	4.6	6.9	28	0.11	250	500
0805USBF-901MRC	>0.30 @ >3.0 GHz	5.8	2.1	9.1	11.8	60	0.14	250	500
0805USBF-172MRC	0.52 @ 2.5 GHz	3.3	4.0	12.8	15.7	101	0.22	250	500
0805USBF-262MRC	0.69 @ 2.0 GHz	2.4	5.7	15.4	18.5	165	0.235	250	500
0805USBF-372MRC	0.93 @ 1.8 GHz	1.4	5.8	18.1	22.3	241	0.27	250	500
0805USBF-502MRC	1.22 @ 1.5 GHz	0.93	11.2	21.6	25.2	315	0.32	250	500
0805USBF-672MRC	1.65 @ 1.2 GHz	0.69	11.3	23.3	27.7	434	0.37	250	450
0805USBF-902MRC	1.91 @ 1.0 GHz	0.73	12.6	25.4	30.0	560	0.63	250	350

0805USBN

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
0805USBN-121MRC	0.14 @ 2.6 GHz	6.4	0.04	0.5	5.0	14	0.11	250	500
0805USBN-271MRC	0.30 @ 2.5 GHz	5.1	0.09	1.4	10.0	30	0.14	250	500
0805USBN-481MRC	0.60 @ 3.0 GHz	3.4	0.13	3.5	14.7	53	0.22	250	500
0805USBN-701MRC	0.79 @ 2.0 GHz	3.4	0.18	5.3	17.4	77	0.235	250	500
0805USBN-941MRC	1.28 @ 1.4 GHz	3.5	0.30	7.6	21.1	105	0.27	250	500
0805USBN-132MRC	1.61 @ 1.2 GHz	2.3	0.50	10.0	24.4	140	0.32	250	500
0805USBN-162MRC	2.00 @ 1.0 GHz	1.5	0.78	12.1	27.3	182	0.37	250	450
0805USBN-222MRC	2.47 @ 0.96 GHz	1.7	1.14	14.0	30.0	252	0.63	250	350

1206USB

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
1206USB-371MLC	0.21 @ 3.0 GHz	2.7	1.2	4.8	8.1	31	0.10	250	1000
1206USB-102MLC	0.36 @ 1.9 GHz	2.2	3.8	9.0	13.3	66	0.14	250	850
1206USB-172MLC	0.55 @ 1.5 GHz	2.1	5.0	12.4	18.0	107	0.18	250	700
1206USB-262MLC	0.76 @ 1.1 GHz	2.0	6.1	15.3	21.0	161	0.22	250	600
1206USB-372MLC	1.11 @ 1.1 GHz	1.2	9.1	18.5	24.4	226	0.26	250	600
1206USB-532MLC	1.45 @ 0.93 GHz	0.78	10.9	21.4	26.3	319	0.30	250	600
1206USB-672MLC	1.69 @ 0.93 GHz	0.75	13.9	23.4	28.0	412	0.34	250	500
1206USB-872MLC	1.99 @ 0.72 GHz	0.53	16.3	25.3	29.4	510	0.39	250	500
1206USB-113MLC	2.24 @ 0.66 GHz	0.51	16.9	27.1	30.0	623	0.44	250	500
1206USB-223MLC	3.36 @ 0.34 GHz	0.22	22.4	33.1	32.3	1040	0.085	250	120

CM1394

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (A)
			100 MHz	400 MHz	500 MHz				
CM1394LC	0.813 @ 660 MHz	1.2	11.1	21.1	22.7	220	0.105	50	15

Q200
125°

RA6870

Part number	Common mode impedance (kOhms)	Cutoff frequency (GHz)	Common mode attenuation typ (dB)			Inductance min (nH)	DCR max (Ohms)	Isolation (Vrms)	Irms (mA)
			10 MHz	100 MHz	500 MHz				
RA6870-ALC	1.94 @ 700 MHz	0.59	12.7	26.2	30.8	700	0.69	250	300


Surface Mount Power Line Common Mode EMI Chokes

Coilcraft's low-cost, high-performance surface mount power line common mode chokes come in a variety of sizes and packages. They are designed to eliminate AC line conducted common mode noise across a broad range of frequencies, with up to 1500 Vrms isolation. These common mode chokes can operate for a wide range of current from 0.06 Amps to 15 Amps, providing attenuation where line filtering is needed, such as in switch-mode power supplies.




Cx

Part number	Common mode peak impedance (kOhms)	Inductance (mH)		I _{rms} (A)	DCR max (mOhms)	Isolation (Vrms)
		nom	min			
CE1755-AL	3.32 @ 5.1 MHz	0.88	0.57	1.2	130	1000
CR7915-AL	3.10 @ 4.9 MHz	1.12	0.73	2.6	49.5	1500
CF3094-AL	7.93 @ 2.5 MHz	1.17	0.76	1.1	200	1000
CM6518-AL	4.17 @ 1.9 MHz	1.40	0.91	2.5	60.0	1500
CJ5094-CL	28.28 @ 0.26 MHz	10.0	6.5	1.2	180	1000
CV9172-AL	70.01 @ 0.21 MHz	22.0	14.3	0.57	850	1000
CF2638L	2.59 @ 4.3 MHz	0.22	0.14	2.9	60.0	1000
CD1479-AL	4.19 @ 3.0 MHz	0.59	0.38	4.2	20.0	1000
CH4659-AL	4.56 @ 2.5 MHz	0.77	0.50	4.7	40.0	1000
CD1480-BL	4.53 @ 2.2 MHz	1.32	0.85	3.5	60.0	1000
CE2439L	9.42 @ 1.1 MHz	1.47	0.96	2.5	80.0	1000
CG3333-AL	2.27 @ 2.9 MHz	0.90	0.59	3.7	50.0	1000
CG3528-AL	6.23 @ 0.72 MHz	3.00	1.95	3.1	42.0	1000
CE1759-AL	4.82 @ 0.99 MHz	0.81	0.52	6.0	14.0	1000
CG3885-AL	3.11 @ 1.8 MHz	0.47	0.30	10.0	8.0	1000
CF2805-AL	3.64 @ 1.9 MHz	0.63	0.40	6.8	14.0	1000



PDMC Combination Line

Part number	Common mode peak impedance (kOhms)	Inductance ±30% (µH)	DCR max (mOhms)	Leakage inductance max (µH)	Isolation (Vrms)	I _{rms} (A)
PDMC-T454NL	3570 @ 1.5 MHz	450	8.2	22.2	2000	8.3

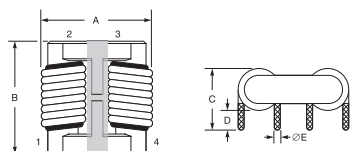

Dimensions (inches mm)


Series	A max	B max	C	D max	E
PDMC-T124NL	1.063 27.0	0.984 12.5	0.630 16.0	0.197 5.0	0.071 1.8
PDMC-T454NL	1.043 26.5	0.984 12.5	0.630 16.0	0.197 5.0	0.035 0.9

SBU9




Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	I _{rms} (A)	DCR max (Ohms)	Isolation (Vrms)
SBU9-103R25LD	94.40 @ 230 kHz	10	0.25	2.5	1500
SBU9-2820R5LD	26.31 @ 570 kHz	2.8	0.50	0.70	1500
SBU9-1320R7LD	12.68 @ 900 kHz	1.3	0.70	0.38	1500
SBU9-6011R0LD	6.66 @ 1300 kHz	0.6	1.00	0.20	1500


CE1755, CR7915, CF3094




CE1759, CG3885, CF2805



CM6518, CJ5094, CV9172, CF2638L, CD1479, CH4659, CD1480, CE2439L, CG3333, CG3528



SBU9




Dimensions (inches mm)

Series	A max	B max	C max
CE1755	0.512 13.0	0.512 13.0	0.215 5.46
CR7915	0.512 13.0	0.512 13.0	0.220 5.6
CF3094	0.512 13.0	0.512 13.0	0.215 5.46
CM6518	0.645 16.38	0.560 14.22	0.350 8.90
CJ5094	0.645 16.38	0.560 14.22	0.350 8.90
CV9172	0.645 16.38	0.560 14.22	0.350 8.90
CF2638L	0.770 19.56	0.670 17.02	0.390 9.91
CD1479	0.770 19.56	0.670 17.02	0.390 9.91
CH4659	0.770 19.56	0.670 17.02	0.390 9.91
CD1480	0.770 19.56	0.670 17.02	0.390 9.91
CE2439L	0.770 19.56	0.670 17.02	0.390 9.91
CG3333	0.770 19.56	0.670 17.02	0.390 9.91
CG3528	0.770 19.56	0.670 17.02	0.390 9.91
CE1759	1.02 26.0	1.22 31.0	0.512 13.0
CG3885	1.02 26.0	1.22 31.0	0.50 12.7
CF2805	1.02 26.0	1.22 31.0	0.50 12.7
SBU9	0.717 18.2	0.492 12.5	0.362 9.2

Through-Hole Power Line Common Mode EMI Chokes

Coilcraft's low-cost through-hole **BU** Series high efficiency choke coils are designed to eliminate line conducted common mode noise across a broad range of frequencies. The **BU9S** and **BU9HS** are ideal for signal line applications; the other BUs can be used in switching power supplies and power supply circuits. For low profile applications, the **BU9** and **BU9S** filters are available in a horizontal configuration that reduces their height to under half an inch (12.5 mm).

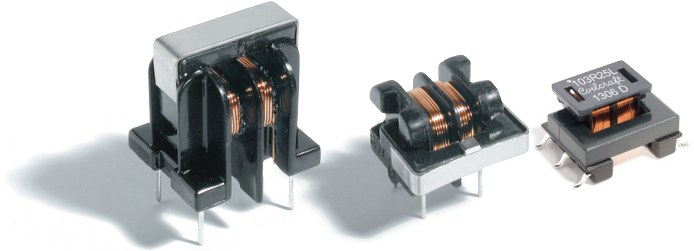


BU, BU9x

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR (Ohms)	Isolation (Vrms)	Irms (A)
BU9S-153R15BL	121.5 @ 4300 kHz	15.0	5.0	1000	0.15
BU9S-7020R3BL	59.81 @ 3700 kHz	7.0	2.5	1000	0.30
BU9HS-153R15BL	121.5 @ 4300 kHz	15.0	5.0	1000	0.15
BU9HS-7020R3BL	59.81 @ 3700 kHz	7.0	2.5	1000	0.30
BU9-103R25BL	123.5 @ 250 kHz	10.0	3.5	1000	0.25
BU9-2820R5BL	25.12 @ 660 kHz	2.8	1.0	1000	0.50
BU9-1320R7BL	17.48 @ 980 kHz	1.3	0.5	1000	0.70
BU9-6011R0BL	5.43 @ 2100 kHz	0.6	0.2	1000	1.00
BU9-2011R6BL	4.39 @ 2900 kHz	0.2	0.1	1000	1.60
BU9H-103R25BL	123.5 @ 250 kHz	10.0	3.5	1000	0.25
BU9H-2820R5BL	25.12 @ 660 kHz	2.8	1.0	1000	0.50
BU9H-1320R7BL	17.48 @ 980 kHz	1.3	0.5	1000	0.70
BU9H-6011R0BL	5.43 @ 2100 kHz	0.6	0.2	1000	1.00
BU9H-2011R6BL	4.39 @ 2900 kHz	0.2	0.1	1000	1.60


BUxx

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR (Ohms)	Isolation (Vrms)	Irms (A)
BU10-1811R2BL	5.13 @ 1100 MHz	0.18	0.20	1000	1.20
BU10-1311R6BL	3.60 @ 1200 MHz	0.13	0.12	1000	1.60
BU10-1012R2BL	1.88 @ 1500 MHz	0.10	0.08	1000	2.20
BU10-6003R0BL	1.15 @ 2100 MHz	0.06	0.04	1000	3.00
BU15-4530R4BL	398.7 @ 130 kHz	45.0	3.0	1000	0.40
BU15-1430R7BL	70.62 @ 260 kHz	14.0	1.0	1000	0.70
BU15-7521R0BL	43.05 @ 340 kHz	7.5	0.6	1000	1.00
BU15-4421R3BL	41.14 @ 510 kHz	4.4	0.3	1000	1.30
BU15-2721R6BL	32.22 @ 620 kHz	2.7	0.2	1000	1.60
BU16-4530R5BL	269.6 @ 130 kHz	45.0	2.3	1000	0.50
BU16-2530R7BL	208.3 @ 190 kHz	25.0	1.3	1000	0.70
BU16-1031R0BL	57.14 @ 310 kHz	10.0	0.5	1000	1.00
BU16-4021R5BL	26.26 @ 470 kHz	4.0	0.3	1000	1.50
BU16-2022R0BL	14.41 @ 740 kHz	2.0	0.2	1000	2.00

BU9, BU9S, BU10, BU15, BU16



BU9H, BU9HS

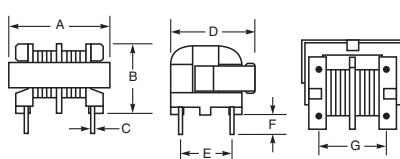


Dimensions (inches mm)

Series	A max	B max	C	D max	E	F	G
BU9, BU9S	0.69 17.5	0.67 17.0	0.024 0.6	0.43 11.0	0.276 ±0.02 7.0 ±0.5	0.157 ±0.04 4.0 ±1.0	0.31 ±0.02 8.0 ±0.5
BU9H, BU9HS	0.69 17.5	0.49 12.5	0.024 0.6	0.61 15.5	0.276 ±0.02 7.0 ±0.5	0.157 ±0.04 4.0 ±1.0	0.31 ±0.02 8.0 ±0.5
BU10	0.75 19.0	0.89 22.5	0.028 0.7	0.67 17.0	0.394 ±0.02 10.0 ±0.5	0.177 ±0.04 4.5 ±1.0	0.51 ±0.02 13.0 ±0.5
BU15	0.91 23.0	1.08 27.5	0.028 0.7	0.75 19.0	0.40 ±0.02 10.0 ±0.5	0.177 ±0.04 4.5 ±1.0	0.51 ±0.02 13.0 ±0.5
BU16	0.91 23.0	1.08 27.5	0.028 0.7	0.75 19.0	0.394 ±0.02 10.0 ±0.5	0.177 ±0.04 4.5 ±1.0	0.51 ±0.02 13.0 ±0.5

CMT Common Mode EMI Chokes

Coilcraft's CMT toroid style common mode chokes are designed to provide the highest common mode impedance over the widest frequency range. These parts are ideal for any application requiring a high DC current bias and are well suited for use in switch-mode power supplies. These common mode chokes are most effective in filtering supply and return conductors with in-phase signals of equal amplitude. Differential mode inductors are available for filtering out-of-phase or uneven amplitude signals.

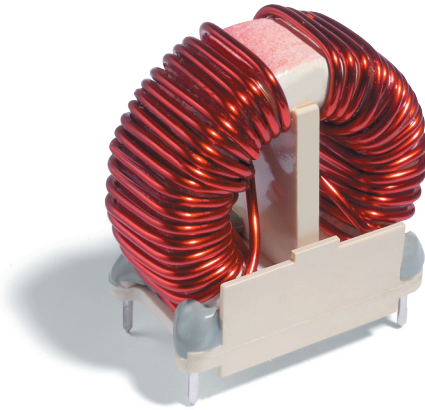

CMT-1

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR max (Ohms)	Leakage inductance max (µH)	Isolation (Vrms)	Irms (A)
CMT1-5.0-1L	36.28 @ 100 MHz	5.0	0.207	80	1250	1
CMT1-8.0-1L	27.98 @ 100 MHz	8.0	0.270	125	1250	1
CMT1-15.0-1L	35.27 @ 51 MHz	15	0.430	233	1250	1
CMT1-25-2L	50.80 @ 59 MHz	2.5	0.090	42	1250	2
CMT1-40-2L	17.53 @ 100 MHz	4.0	0.095	70	1250	2
CMT1-7.5-2L	2.29 @ 1.6 MHz	7.5	0.108	74	1250	2
CMT1-13-4L	31.76 @ 48 MHz	1.3	0.029	20	1250	4
CMT1-21-4L	13.05 @ 100 MHz	2.1	0.040	36	1250	4
CMT1-3.7-4L	47.42 @ 46 MHz	3.7	0.036	40	1250	4
CMT1-10-6L	12.64 @ 0.63 MHz	1.0	0.022	19	1250	6
CMT1-1.7-6L	43.05 @ 100 MHz	1.7	0.032	34	1250	6
CMT1-3.0-6L	160.40 @ 0.16 MHz	3.0	0.027	35	1250	6
CMT1-6-9L	22.06 @ 0.49 MHz	0.6	0.012	11	1250	9
CMT1-11-9L	28.44 @ 0.92 MHz	1.1	0.013	12	1250	9
CMT1-19-9L	9.53 @ 12 MHz	1.9	0.017	20	1250	9
CMT1-5-12L	9.53 @ 12 MHz	0.5	0.008	9.0	1250	12
CMT1-8-12L	8.27 @ 12 MHz	0.8	0.008	9.0	1250	12
CMT1-1.4-12L	46.14 @ 0.38 MHz	1.4	0.011	16	1250	12
CMT1-3-15L	35.27 @ 100 MHz	0.3	0.005	6.0	1250	15
CMT1-6-15L	17.74 @ 0.27 MHz	0.6	0.006	6.5	1250	15
CMT1-1.1-15L	81.12 @ 0.25 MHz	1.1	0.008	13.7	1250	15

CMT-3


Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR max (Ohms)	Leakage inductance max (µH)	Isolation (Vrms)	Irms (A)
CMT3-32-1L	215.01 @ 0.18 MHz	32	0.650	485	1250	1
CMT3-56-1L	149.83 @ 0.12 MHz	56	0.900	780	1250	1
CMT3-16-2L	215.13 @ 0.12 MHz	16	0.240	210	1250	2
CMT3-28-2L	22.33 @ 100 MHz	28	0.330	410	1250	2
CMT3-8-4L	29.82 @ 0.1 MHz	8.0	0.061	57.5	1250	4
CMT3-14-4L	28.53 @ 0.46 MHz	14	0.120	180	1250	4
CMT3-6.6-6L	41.91 @ 0.1 MHz	6.6	0.048	49	1250	6
CMT3-11.5-6L	13.83 @ 0.43 MHz	11.5	0.088	140	1250	6
CMT3-4-9L	14.47 @ 100 MHz	4.0	0.026	37	1250	9
CMT3-7-9L	26.76 @ 0.38 MHz	7.0	0.045	104	1250	9
CMT3-3-12L	25.59 @ 0.95 MHz	3.0	0.022	40	1250	12
CMT3-5.2-12L	20.13 @ 0.32 MHz	5.2	0.025	47	1250	12
CMT3-2.5-15L	79.68 @ 0.16 MHz	2.5	0.019	42	1250	15
CMT3-4.4-15L	19.83 @ 0.27 MHz	4.4	0.017	48	1250	15
CMT4-72-1L	19.27 @ 0.18 MHz	72	1.15	1400	1250	1
CMT4-125-1L	157.53 @ 0.18 MHz	125	1.15	1400	1250	1
CMT4-36-2L	30.29 @ 0.1 MHz	36	0.415	680	1250	2
CMT4-62-2L	26.48 @ 0.12 MHz	62	0.415	750	1250	2
CMT4-19-4L	186.61 @ 0.12 MHz	19	0.15	350	1250	4
CMT4-32-4L	39.44 @ 0.12 MHz	32	0.158	370	1250	4
CMT4-15-6L	247.34 @ 0.17 MHz	15	0.114	275	1250	6
CMT4-26-6L	91.87 @ 0.16 MHz	26	0.115	320	1250	6
CMT4-10-9L	28.15 @ 0.1 MHz	10	0.057	190	1250	9
CMT4-17-9L	433.33 @ 0.11 MHz	17	0.062	220	1250	9
CMT4-7.5-12L	56.92 @ 0.34 MHz	7.5	0.042	140	1250	12
CMT4-13-12L	25.54 @ 0.98 MHz	13	0.043	155	1250	12
CMT4-6-15L	80.52 @ 0.31 MHz	6.0	0.03	111	1250	15
CMT4-10-15L	66.10 @ 0.1 MHz	10	0.029	122	1250	15

CMT-2

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR max (Ohms)	Leakage inductance max (µH)	Isolation (Vrms)	Irms (A)
CMT2-7.5-1L	4.25 @ 11 MHz	7.5	0.270	90	1250	1
CMT2-13-1L	26.46 @ 110 MHz	13	0.415	190	1250	1
CMT2-3.8-2L	2.15 @ 1.5 MHz	3.8	0.106	48	1250	2
CMT2-6.5-2L	33.27 @ 35 MHz	6.5	0.145	98	1250	2
CMT2-19-4L	2.98 @ 12 MHz	1.9	0.038	26	1250	4
CMT2-3.3-4L	27.29 @ 100 MHz	3.3	0.055	45	1250	4
CMT2-15-6L	35.92 @ 39 MHz	1.5	0.029	21	1250	6
CMT2-2.6-6L	16.92 @ 11 MHz	2.6	0.040	41	1250	6
CMT2-9-9L	161.50 @ 0.27 MHz	0.9	0.014	17	1250	9
CMT2-15-9L	27.13 @ 20 MHz	1.5	0.013	15	1250	9
CMT2-7-12L	29.70 @ 0.61 MHz	0.7	0.011	14	1250	12
CMT2-1.2-12L	32.73 @ 0.78 MHz	1.2	0.011	14	1250	12
CMT2-5-15L	56.35 @ 0.41 MHz	0.5	0.007	8.7	1250	15
CMT2-8-15L	110.44 @ 13 MHz	0.8	0.007	10	1250	15

CMT-4

Part number	Common mode peak impedance (kOhms)	Inductance min (mH)	DCR max (Ohms)	Leakage inductance max (µH)	Isolation (Vrms)	Irms (A)
CMT4-72-1L	19.27 @ 0.18 MHz	72	1.15	1400	1250	1
CMT4-125-1L	157.53 @ 0.18 MHz	125	1.15	1400	1250	1
CMT4-36-2L	30.29 @ 0.1 MHz	36	0.415	680	1250	2
CMT4-62-2L	26.48 @ 0.12 MHz	62	0.415	750	1250	2
CMT4-19-4L	186.61 @ 0.12 MHz	19	0.15	350	1250	4
CMT4-32-4L	39.44 @ 0.12 MHz	32	0.158	370	1250	4
CMT4-15-6L	247.34 @ 0.17 MHz	15	0.114	275	1250	6
CMT4-26-6L	91.87 @ 0.16 MHz	26	0.115	320	1250	6
CMT4-10-9L	28.15 @ 0.1 MHz	10	0.057	190	1250	9
CMT4-17-9L	433.33 @ 0.11 MHz	17	0.062	220	1250	9
CMT4-7.5-12L	56.92 @ 0.34 MHz	7.5	0.042	140	1250	12
CMT4-13-12L	25.54 @ 0.98 MHz	13	0.043	155	1250	12
CMT4-6-15L	80.52 @ 0.31 MHz	6.0	0.03	111	1250	15
CMT4-10-15L	66.10 @ 0.1 MHz	10	0.029	122	1250	15

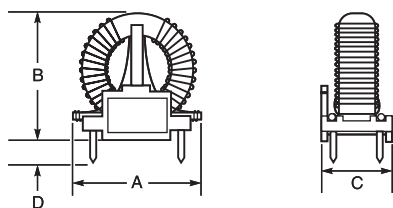

Dimensions (inches mm)

Series	A max	B max	C max	D ref
CMT1-5.0-1L	1210, 30,7	1100, 27,9	0,625, 15,9	0,150 3,81
CMT1-8.0-1L	1210, 30,7	1100, 27,9	0,625, 15,9	0,150 3,81
CMT1-15.0-1L	1300, 33,0	1155, 29,4	0,625, 15,9	0,150 3,81
CMT1-2.5-2L	1210, 30,7	1100, 27,9	0,625, 15,9	0,150 3,81
CMT1-4.0-2L	1210, 30,7	1050, 26,7	0,625, 15,9	0,150 3,81
CMT1-7.5-2L	1300, 33,0	1155, 29,4	0,625, 15,9	0,150 3,81
CMT1-1.3-4L	1210, 30,7	1100, 27,9	0,625, 15,9	0,150 3,81
CMT1-2.1-4L	1210, 30,7	1100, 27,9	0,625, 15,9	0,150 3,81
CMT1-3.7-4L	1300, 33,0	1125, 28,6	0,625, 15,9	0,150 3,81
CMT1-1.0-6L	1210, 30,7	1100, 27,9	0,625, 15,9	0,150 3,81
CMT1-1.7-6L	1300, 33,0	1155, 29,4	0,625, 15,9	0,150 3,81
CMT1-3.0-6L	1210, 30,7	1200, 30,5	0,625, 15,9	0,150 3,81
CMT1-6-9L	1210, 30,7	1200, 30,5	0,625, 15,9	0,150 3,81
CMT1-11-9L	1210, 30,7	1300, 33,0	0,625, 15,9	0,150 3,81
CMT1-1.9-9L	1400, 35,6	1300, 33,0	0,625, 15,9	0,150 3,81
CMT1-5-12L	1210, 30,7	1200, 30,5	0,650, 16,5	0,150 3,81
CMT1-8-12L	1210, 30,7	1200, 30,5	0,650, 16,5	0,150 3,81
CMT1-1.4-12L	1210, 30,7	1300, 33,0	0,650, 16,5	0,150 3,81
CMT1-3-15L	1210, 30,7	1300, 33,0	0,625, 15,9	0,150 3,81
CMT1-6-15L	1210, 30,7	1250, 31,8	0,650, 16,5	0,150 3,81
CMT1-11-15L	1210, 30,7	1250, 31,8	0,700, 17,8	0,150 3,81

Dimensions (inches mm)

Series	A max	B max	C max	D ref
CMT3-32-1L	1650, 41,9	1400, 35,6	0,925, 23,5	0,150 3,81
CMT3-56-1L	1650, 41,9	1650, 41,9	0,925, 23,5	0,150 3,81
CMT3-16-2L	1650, 41,9	1400, 35,6	0,925, 23,5	0,150 3,81
CMT3-28-2L	1650, 41,9	1650, 41,9	0,925, 23,5	0,150 3,81
CMT3-8-4L	1650, 41,9	1350, 34,3	0,925, 23,5	0,150 3,81
CMT3-14-4L	1650, 41,9	1700, 43,2	0,950, 24,1	0,150 3,81
CMT3-6.6-6L	1600, 40,6	1400, 35,6	0,925, 23,5	0,150 3,81
CMT3-11.5-6L	1650, 41,9	1700, 43,2	0,925, 23,5	0,150 3,81
CMT3-4-9L	1450, 36,8	1400, 35,6	0,925, 23,5	0,150 3,81
CMT3-7-9L	1760, 44,7	1760, 44,7	0,975, 24,8	0,150 3,81
CMT3-3-12L	1700, 43,2	1700, 43,2	0,950, 24,1	0,150 3,81
CMT3-5.2-12L	1700, 43,2	1700, 43,2	1,000, 25,4	0,150 3,81
CMT3-2.5-15L	1750, 44,5	1750, 44,5	1,000, 25,4	0,150 3,81
CMT3-4.4-15L	1700, 43,2	1700, 43,2	1,000, 25,4	0,150 3,81

Dimensions (inches mm)

Series	A max	B max	C max	D ref
CMT2-7.5-1L	1310, 33,3	1100, 27,9	0,825, 21,0	0,150 3,81
CMT2-13-1L	1310, 33,3	1300, 33,0	0,825, 21,0	0,150 3,81
CMT2-3.8-2L	1310, 33,3	1100, 27,9	0,825, 21,0	0,150 3,81
CMT2-6.5-2L	1310, 33,3	1300, 33,0	0,825, 21,0	0,150 3,81
CMT2-1.9-4L	1310, 33,3	1100, 27,9	0,825, 21,0	0,150 3,81
CMT2-3.3-4L	1310, 33,3	1300, 33,0	0,825, 21,0	0,150 3,81
CMT2-1.5-6L	1310, 33,3	1100, 27,9	0,825, 21,0	0,150 3,81
CMT2-2.6-6L	1400, 35,6	1400, 35,6	0,900, 22,9	0,150 3,81
CMT2-9-9L	1310, 33,3	1200, 30,5	0,825, 21,0	0,150 3,81
CMT2-1.5-9L	1250, 31,8	1250, 31,8	0,825, 21,0	0,150 3,81
CMT2-7-12L	1250, 31,8	1200, 30,5	0,825, 21,0	0,150 3,81
CMT2-1.2-12L	1250, 31,8	1200, 30,5	0,825, 21,0	0,150 3,81
CMT2-5-15L	1300, 33,0	1300, 33,0	0,825, 21,0	0,150 3,81
CMT2-8-15L	1250, 31,8	1200, 30,5	0,825, 21,0	0,150 3,81

Dimensions (inches mm)

Series	A max	B max	C max	D ref
CMT4-72-1L	2100, 53,3	2100, 53,3	1,130, 28,7	0,150 3,81
CMT4-125-1L	2150, 54,6	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-36-2L	2150, 54,6	2215, 56,3	1,130, 28,7	0,150 3,81
CMT4-62-2L	2150, 54,6	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-19-4L	2180, 55,4	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-32-4L	2180, 55,4	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-15-6L	2180, 55,4	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-26-6L	2180, 55,4	2225, 56,5	1,130, 28,7	0,150 3,81
CMT4-10-9L	2180, 55,4	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-17-9L	2250, 57,2	2280, 57,9	1,150, 29,2	0,150 3,81
CMT4-7.5-12L	2250, 57,2	2200, 55,9	1,130, 28,7	0,150 3,81
CMT4-13-12L	2300, 58,4	2250, 57,2	1,130, 28,7	0,150 3,81
CMT4-6-15L	2250, 57,2	2250, 57,2	1,150, 29,2	0,150 3,81
CMT4-10-15L	2300, 58,4	2280, 57,9	1,130, 28,7	0,150 3,81

Wirewound Ferrite Beads

Wirewound ferrite beads cancel EMI for high frequency electronic noise suppression. Off-the-shelf beads prevent interference in power supplies and data lines as industrial and automotive grade noise filters for USB, CAN bus, PoC, ADAS, xEV, and Class-D audio amplifiers. These chokes will help to meet electromagnetic compatibility (EMC) standards such as FCC Title 47 CFR Part 15 and CISPR.


0200
125°

0805PB Ferrite



Part number	Inductance (µH)	Impedance		SRF typ (MHz)	DCR max (mOhms)	I _{rms} (mA)
		900 MHz	1.7 GHz			
0805PB-250XMRC	0.1	75	120	3200	12.2	4400
0805PB-101XMRC	0.4	250	400	1800	19	3200
0805PB-221XMRC	0.9	700	1000	1100	30.5	3000
0805PB-331XMRC	1.2	1100	1350	950	37.8	2400
0805PB-601XMRC	2.3	1700	1700	680	62.2	1900
0805PB-102XMRC	3.6	2700	1500	480	139.1	1400

0805PB, 0805RB



Dimensions (inches mm)

Series	A max	B max	C max	D ref	E	F	G
0805PB	0.086 2.18	0.054 1.37	0.047 1.20	0.006 0.15	0.050 1.27	0.018 0.46	0.096 2.44
0805RB	0.090 2.29	0.068 1.73	0.606 1.52	0.020 0.51	0.050 1.27	0.014 0.36	0.054 1.37

0805RB Ferrite



Part number	Inductance (µH)	Impedance typ		SRF typ (MHz)	DCR max (mOhms)	I _{rms} (mA)
		900 MHz	1.7 GHz			
0805RB-121XMRC	0.19 @ 7.9 MHz	2900	1000	1000	130	1200
0805RB-151XMRC	0.24 @ 7.9 MHz	4200	1060	970	150	1100
0805RB-221XMRC	0.33 @ 7.9 MHz	2360	660	650	180	1000
0805RB-331XMRC	0.53 @ 7.9 MHz	3300	920	650	235	900
0805RB-421XMRC	0.66 @ 7.9 MHz	2100	760	550	245	850
0805RB-471XMRC	0.75 @ 7.9 MHz	2000	760	530	295	800
0805RB-601XMRC	0.95 @ 7.9 MHz	2125	840	500	385	700
0805RB-751XMRC	1.20 @ 7.9 MHz	1900	770	440	405	650
0805RB-102XMRC	1.60 @ 7.9 MHz	1700	710	375	810	450
0805RB-152XMRC	2.35 @ 7.9 MHz	1600	960	310	1160	425
0805RB-222XMRC	2.60 @ 7.9 MHz	1000	900	150	1200	350
0805RB-272XMRC	2.87 @ 7.9 MHz	475	830	100	1320	325

The Ultimate Kit for Antenna Matching

Why do so many users love our 0402DC Series Ceramic Chip Inductor Designer's Kit? To start, the 0402DC Series provides the industry's highest Q factors in its size to achieve super low loss in high frequency circuits.

The 0402DC is also offered in 112 inductance values from 0.8 to 120 nH - including 0.1 nH increments between 2.8 and 10 nH!

And, with 20 samples of every value, the C472-2 Kit is the perfect resource when you're designing impedance matching circuits for antennas in both lowband (700 - 960 MHz) and highband (1710 - 2700 MHz) applications.

Other features of the 0402DC include:

- Wirewound construction for extremely high SRF - up to 16 GHz
- DCR as low as 25 mOhm, significantly lower than other 0402-sized chip inductors

Order your C472-2 Designer's Kit directly on coilcraft.com!





Designer's Kits

To simplify your prototyping, we offer low cost Designer's Kits for many of our products. Each has an assortment of standard values along with detailed product specifications. We even offer free refills for the parts you use most often. To purchase, call **800-322-2645** or order your kits on-line at www.coilcraft.com/en-us/kits/.



QUANTITY DISCOUNTS

- 10% off** any combination of 3 or more
- 20% off** any combination of 5 or more
- 30% off** any combination of 7 or more



Power Kits

Series	KitNo.
0603PS	C346
0805PS	C348
1008PS	C341
1010VS/1212VS/2014VS	C456
1812PS	C343
DC1012	P410
DO1605T	C353
DO1606T	C338
DO1608C	C377
DO1813H	C331
DO3308P	C309
DO3314	C358
DO3316H	C326
DO3316P	C378
DO3316T	C396
DO3340P	C310
DO5010H	C355
DO5022P	C311
DS1608B	C334
EPL2010	C412
EPL2014	C413
EPL3010	C431
EPL3012	C437
EPL3015	C405
LPD/MSD	C463
LPD5030V/LPD8035V	C481
LPO2506In-Board	C332
LPO2506On-board	C333
LPO3010	C388
LPO3310	C375
LPO4812	C357
LPO4815	C376
LPO6013	C352
LPO6610	C367
LPS3030	C485
LPS30xx	C392
LPS3314	C330
LPS4010	C514
LPS4040	C494
LPS40xx Low Inductance	C401
LPS4414	C340
LPS5010	C407
LPS5015	C350
LPS5030	C420
LPS5050	C493
LPS6225	C349
LPS6235	C345
LPSxx High Inductance	C402
ME3215	C408
ME3220	C386
MLC12xx/MLC15xx	C387
MOS6020	C359

MSD1278	C400
MSS1038	C391
MSS1048	C409
MSS1210H	C498
MSS1246	C410
MSS1246H	C510
MSS1246T	C417
MSS1260	C360
MSS1260H	C511
MSS1260T	C418
MSS1278	C380
MSD1278H	C512
MSS1278T	C419
MSS1812T	C499
MSS4020	C381
MSS5121	C411
MSS5131H	C362
MSS6122	C363
MSS6132	C364
MSS7341	C385
PCV-0/PCV-2	P405
PFL1005	C484
PFL1609/PFL2010	C433
PFL2510/PFL2512	C444
PFL4514/PFL4517	C451
SER1052	C421
SER1360	C365
SER1400	C427
SER1590	C366
SER2000	C374
SLC/SLR	C467
SLC7530	C379
XAL1010/XAL1060	C435
XAL40xx	C429
XAL50xx	C445
XAL60xx	C442
XAL7020	C452
XAL7030	C441
XAL7070	C443
XEL35xx	C465
XEL40xx	C464
XEL50xx	C480
XEL60xx	C466
XFL2005	C479
XFL2006	C478
XFL2010	C513
XFL3010/XFL3012	C440
XFL4012/XFL4015	C455
XFL4020	C436
XFL/XGL Essentials	C509
XGL1010	C516
XGL1060	C497
XGL1313	C518
XGL3512	C502
XGL3515	C503
XGL3520	C490

XGL3530	C489
XGL4012	C517
XGL4015	C505
XGL4018	C508
XGL4020	C483
XGL4025	C506
XGL4030	C486
XGL4040	C507
XGL5020	C495
XGL5030	C492
XGL5050	C500
XGL6030	C496
XGL6060	C491

RF Kits

Series	Tolerance	KitNo.
0201AF	10%	C471
"Slot Ten" 10mm		M100
"Unicoil" 5mm		M305
"Unicoil" 7 and 10mm		M302
016008C	5%	C488
0201CT	10%	C519
0201DS	5%	C425
0201HL	5%	C475
026011C	5%	C473
026011F	5%	C474
0302CS	5%	C370
0402AF	5%	C397
0402CS	5%	C328
0402CS	2%	C328-2
0402CT	5%	C482
0402CT	2%	C482-2
0402DC	2%	C472-2
0402DF	5%	C462
0402HL	5%	C453
0402HP	5%	C403
0402HP	2%	C403-2
0402PA	5%	C373
0403HQ	5%	C371
0603AF	5%	C439
0603CS	5%	C324
0603CS	2%	C324-2
0603CT	5%	C423
0603CT	2%	C423-2
0603DC	5%	C487
0603DC	2%	C487-2
0603HC	5%	C339
0603HL	5%	C449
0603HP	5%	C406
0603HP	2%	C406-2
0603LS	5%	C347
0604HQ	5%	C351
0805AF	5%	C450
0805CS	5%	C303

0805CS	2%	C303-2
0805HP	5%	C477
0805HP	2%	C477-2
0805HQ	5%	C325
0805HT	5%	C321
0805LS	5%	C354
0806SQ/0807SQ/0908SQ	5%	C424
0806SQ/0807SQ/0908SQ	2%	C424-2
0906/1606 Micro Spring™	5%	C308
0906/1606 Micro Spring™	2%	C308-2
1008AF	5%	C414
1008CS	5%	C300
1008CS	2%	C300-2
1008HQ	5%	C323
1008HQ	2%	C323-2
1008HT	5%	C322
1008LS	5%	C336
1111SQ	5%	C457
1206CS	5%	C320
132.148		M304
132SM Maxi Spring™	5%	C319
132SM Maxi Spring™	2%	C319-2
1508/2508 Low Profile Mini Spring™	5%	C394
1508/2508 Low Profile Mini Spring™	2%	C394-2
1512SP/2712SP	5%	C501
1512SP/2712SP	2%	C501-2
1515SQ/2222SQ/2929SQ	5%	C438
1515SQ/2222SQ/2929SQ	2%	C438-2
1812CS	5%	C337
1812LS	5%	C314
1812SMS Midi Spring*	5%	C318
1812SMS Midi Spring*	2%	C318-2
4308RV		C383
5315TC		C369
AOxT/BxxT Mini Spring™	5%	C302
AOxT/BxxT Mini Spring™	2%	C302-2
GA309x	5%	C459
HA403x	5%	C458

026011F Ferrite Beads	5%	C474
0402AF Ferrite Beads	5%	C397
0402DF Ferrite Beads	5%	C462
0603AF Ferrite Beads	5%	C439
0603LS Ferrite Beads	5%	C347
0603USB/0805USBx/1206USB USB 3.x/2.0 Common Mode Chokes		C470
0805AF Ferrite Beads	5%	C450
0805LS Ferrite Beads	5%	C354
1008AF Ferrite Beads	5%	C414
1008LS Ferrite Beads	5%	C336
1812LS Ferrite Beads	5%	C314
CCDLF/CDF/PDLF/DLF Data Line Common Mode Filters		D303
E349x/F55xx/G6252P32xx Power Line Common Mode Chokes		P402

Transformer Kits

Series	Description	KitNo.	
CST			
Current Sensors, SMT		C389	
D18xx/CS1x/CS4x/CS60P403		PL140	
Planar Transformers		C390	
PL160/PL300		Planar Transformers	C460
Planar Transformer Prototyping Kit Design full/half bridge (140 W), push/pull converter (100 W), forward converter (50 W), flyback (25 W)		C356	
POExxC		C382	
POE13F/POE60F		PoE Transformers	C372
POE13P/POE30P/POE70P		PoEP Transformers	C395
POE300F		Transformers	C398
POE60C/POD603D		Miniature PoE Transformers	C382
PWB Wideband		RF Transformers	C404
SD250 Base/Gate Driver Transformers		P404	
WBC Wideband		RF Transformers	C393

Series	Description	KitNo.
0201AF	Ferrite Beads	10% C471


EMI Kits



Coilcraft®

www.coilcraft.com

The Inductor Website Preferred by Engineers!*

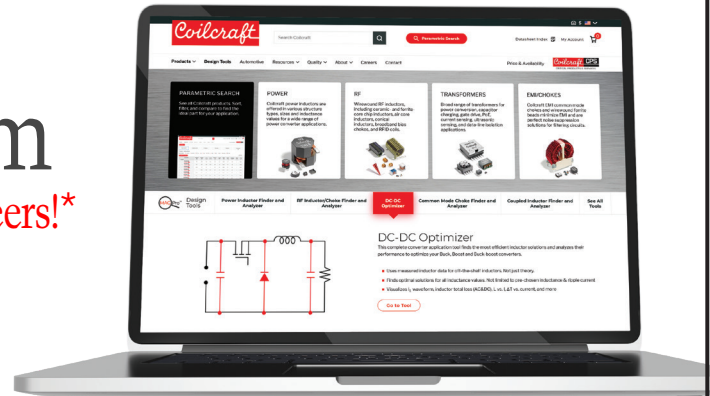

- Powerful **MAGPro™** design tools reduce design time
- Intuitive site navigation and easy order entry process
- Expanded resources, educational materials and models
- Responsive technical support and customer service

Come visit and see for yourself!

* Preferred Inductor Website:
(Source: 2022 Electronic Design Magazine Brand Study)

Asia / Pacific Rim Sales

Hong Kong ellaleung@coilcraft-hk.com

+852-2385-5783

India india_sales@coilcraft.com

+91-44 4230 7308 / +91-44 4230 7306

Japan mshibuya@coilcraft.co.jp

+81-427-20-5404

Malaysia stephen_lim@coilcraft.com.sg

+60-4 6586144

PRC sales@coilcraft.com.cn

+86-021-6218 8074

Singapore tktan@coilcraft.com.sg

+65-6484 8412

Taiwan winson@coilcraft.com.tw

+886-2-2264 3646

Korea Tammy's Corporation ted@tammy.co.kr

North America Sales & Europe Sales

North America info@coilcraft.com

847-639-6400

Europe sales@coilcraft-europe.com

+44-1236-730595