

Coilcraft S-Parameter Data for RF Surface Mount Inductors 0402CS Series Chip Inductors

Version 0402CS October 2017 Coilcraft, Inc. 2017


Coilcraft two-port S-parameter data files are based on empirical measurements of Coilcraft RF Surface Mount Inductors. The data files are used as "black box" descriptions, thus reducing complexity in circuit modeling. For one-port applications, simply connect one terminal of the component to ground in your circuit simulator software.

The data files represent de-embedded measurements. Effects due to customer circuit board traces, board materials, ground planes, or interactions with other components are not included and can have a significant effect when comparing the S-parameters to measurements of the inductors using typical production verification instruments and fixtures.

Typically, the Self Resonant Frequency (SRF) of the component model will be higher than the measurement of the component mounted on a circuit board. The parasitic reactive elements of a circuit board or fixture will effectively lower the circuit resonant frequency, especially for very small inductance values. Since data sheet specifications are based on typical production measurements, and the S-parameter models are based on de-embedded measurements as described below, the S-parameter model results may be different from the data sheet specifications.

S-parameter modeling method

The measurements for this series were made with each component centered over a 0.0165" wide air gap, as illustrated below. The test pads were (50 Ohm) 30 mil wide traces of tinned gold over 25 mil thick alumina. The TRL* calibration plane is also illustrated below.

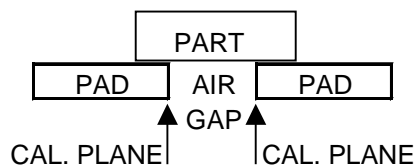

The S-parameters were generated by matching a simulation model as closely as possible to an average of the original measurements. The model was then used to create the final S-parameters. This method results in a model that represents as closely as possible the typical frequency-dependent behavior of the component up to a frequency just above the self-resonant frequency of the model. The valid frequency range for each part is specified in Table 1 below.

Coilcraft S-Parameter Data for RF Surface Mount Inductors 0402CS Series Chip Inductors

Table 1
Valid Frequency Range of S-parameters

Part Number	Range (MHz)		Part Number	Range (MHz)		Part Number	Range (MHz)
0402CS-1N0	1 - 21300		0402CS-6N8	1 - 10700		0402CS-23N	1 - 6700
0402CS-1N2	1 - 21300		0402CS-7N5	1 - 10700		0402CS-24N	1 - 6200
0402CS-1N8	1 - 21300		0402CS-8N2	1 - 9400		0402CS-27N	1 - 6200
0402CS-1N9	1 - 21200		0402CS-8N7	1 - 9900		0402CS-30N	1 - 5300
0402CS-2N0	1 - 18100		0402CS-9N0	1 - 8700		0402CS-33N	1 - 5000
0402CS-2N2	1 - 17900		0402CS-9N5	1 - 8600		0402CS-36N	1 - 5000
0402CS-2N4	1 - 17900		0402CS-10N	1 - 8300		0402CS-39N	1 - 5200
0402CS-2N7	1 - 17900		0402CS-11N	1 - 8600		0402CS-40N	1 - 4800
0402CS-3N3	1 - 14800		0402CS-12N	1 - 7200		0402CS-43N	1 - 5100
0402CS-3N6	1 - 14700		0402CS-13N	1 - 7200		0402CS-47N	1 - 4800
0402CS-3N9	1 - 14700		0402CS-15N	1 - 7300		0402CS-51N	1 - 4600
0402CS-4N3	1 - 14700		0402CS-16N	1 - 7300		0402CS-56N	1 - 4400
0402CS-4N7	1 - 14400		0402CS-18N	1 - 7300		0402CS-68N	1 - 4000
0402CS-5N1	1 - 13200		0402CS-19N	1 - 6700		0402CS-82N	1 - 2900
0402CS-5N6	1 - 11900		0402CS-20N	1 - 6700		0402CS-R10	1 - 2500
0402CS-6N2	1 - 11000		0402CS-22N	1 - 6700		0402CS-R12	

How to use the files

The chip inductor data file names have the format XXWWZZZ.S2P:

XX = the first two digits of the inductor part number

WW = the specific inductor series (CS, HS, PS, CT, HT, LS)

ZZZ= the nominal inductance value stated on the data sheet

For example, if you were interested in a Coilcraft 0402CS chip inductor with an inductance of 5.1 nH, the file you would choose is 04CS5N1.S2P

S-parameter file description.

All of the S-parameter data files are in the TouchStone format. The following is a typical data segment of a two-port file:

```
# MHZ S MA R 50
!Freq MagS11 AngS11 MagS21 AngS21 MagS12 AngS12 MagS22 AngS22
1 0.001 59.879 1.000 -0.036 1.000 -0.036 0.001 59.879
22.19 0.014 83.698 0.999 -0.798 0.999 -0.798 0.014 83.698
43.38 0.027 84.582 0.998 -1.558 0.998 -1.558 0.027 84.582
....
```

Coilcraft S-Parameter Data for RF Surface Mount Inductors 0402CS Series Chip Inductors

The first line (header) describes the frequency units, parameter, measurement format and characteristic impedance of the measurement (50 Ohms).

The first column is the frequency in MHz. The next columns are the S-parameters as described in the column headings.

Disclaimer

Coilcraft makes every attempt to provide accurate measurement data and software, representative of our components, in a usable format. Coilcraft, however, disclaims all warrants relating to the use of its data and software, whether expressed or implied, including without limitation any implied warranties of merchantability or fitness for a particular purpose. Coilcraft cannot and will not be liable for any special, incidental, consequential, indirect or similar damages occurring with the use of the data and/or software.