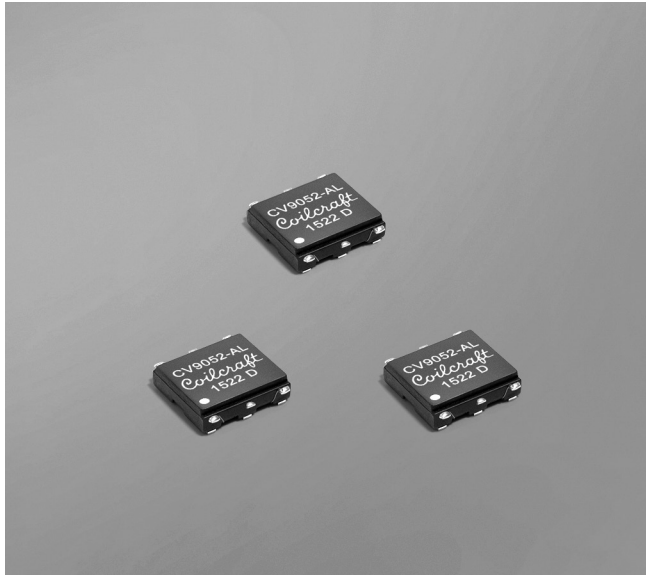


NEW!

Gate Drive Transformer

Linear Technology DC1739B-C
Active Clamp Converter

- Developed for Linear Technology DC1739B-C Active Clamp forward Converter
- 1500 Vrms, one minute isolation (hipot) between windings

Core material Ferrite**Terminations** RoHS tin-silver over copper**Weight** 0.35g**Ambient temperature** -40°C to +85°C**Maximum part temperature** +105°C (ambient + temp rise).**Storage temperature** Component: -40°C to +85°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 350/7" reel; 1200/13" reel Plastic tape: 24 mm wide, 0.3 mm thick, 16 mm pocket spacing, 3.05 mm pocket depth**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Turns ratio pri : sec	Primary inductance ² ±25% (µH)	Leakage inductance ³ max (µH)	DCR max (Ohms)		Volt-time product max (V-µsec)
				Primary	Secondary	
CV9052-AL_	1.25 : 1	931.5	0.90	1.03	0.85	20.0






1. When ordering, please specify **packaging** code:**CV9052-ALC****Packaging:** **C** = 7" machine ready reel. EIA-481 embossed plastic tape (500 per full reel).**B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.**D** = 13" machine ready reel. EIA-481 embossed plastic tape, factory order only, not stocked (1200 per full reel).

2. Inductance is tested between pins 1 and 3 at 100 kHz, 0.05 Vrms, 0 Adc.

3. Leakage inductance is for the primary, measured at 100 kHz, 0.05 Vrms, 0 Adc with the secondary windings shorted.

4. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Dot indicates pin 1
Internal codeDimensions are in $\frac{\text{inches}}{\text{mm}}$ **Coilcraft**

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com**UK** +44-1236-730595 sales@coilcraft-europe.com**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw**China** +86-21-6218 8074 sales@coilcraft.com.cn**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1323 Revised 12/16/15

© Coilcraft Inc. 2017

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.