


NEW!

720 W Planar Transformer

For TI 720 W Full Bridge DC/DC Converter

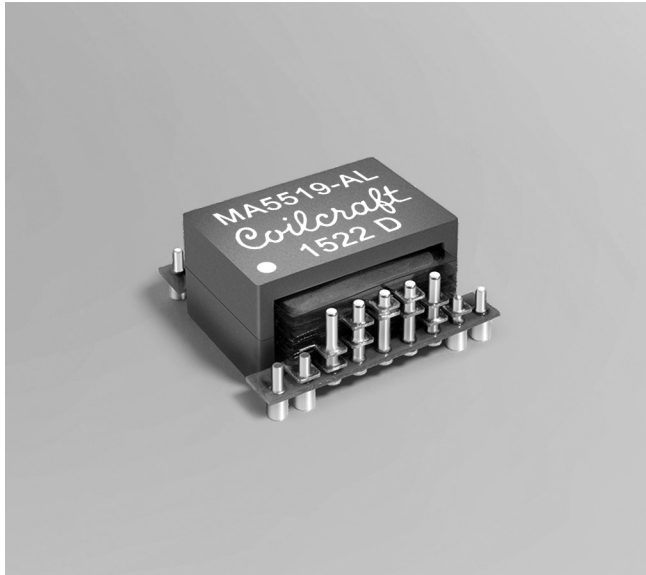

- Developed for Texas Instruments PMP9219 LM5045 Based 720 W Power Converter
- Designed to operate at 400 kHz with 36 – 75 V input
- 1500 Vrms, one minute isolation from primary to secondary windings
- Listed as T2 on Texas Instruments BOM-PMP9219

Core material Ferrite

Terminations Matte tin over nickel over brass.

Weight 53.9 g

Ambient temperature -40°C to +125°C

Maximum part temperature +150°C (ambient + temp rise)

Storage temperature Component: -40°C to +125°C.

Tray packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)


38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 16 per tray

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number	Inductance at 0A ¹ ±30% (µH)	DCR max (mOhms)				Leakage inductance max (µH)	Turns				Output
		pri	sec	aux1	aux2		pri	sec	aux1	aux2	
MA5519-AL	190.8	5.0	1.53	178	178	0.13	6	4	2	2	12 V, 60 A

1. Inductance is measured at 300 kHz, 1.0 Vrms, 0 Adc.
 2. Leakage inductance is for the primary, measured with the secondary shorted
 3. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

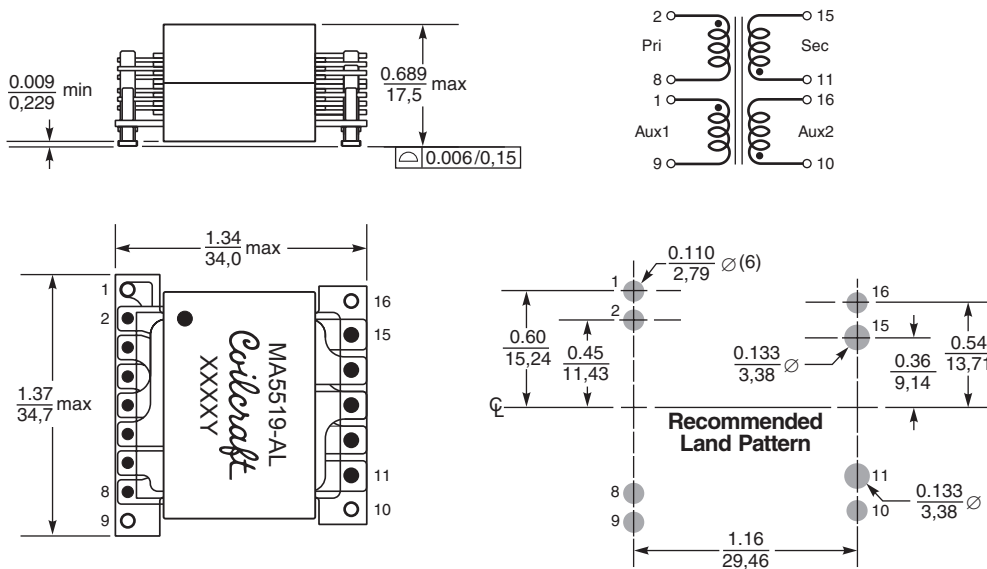

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1217 Revised 07/14/15

© Coilcraft Inc. 2015

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.