


Isolation Transformer

For Texas Instruments SN6501
Transformer Driver

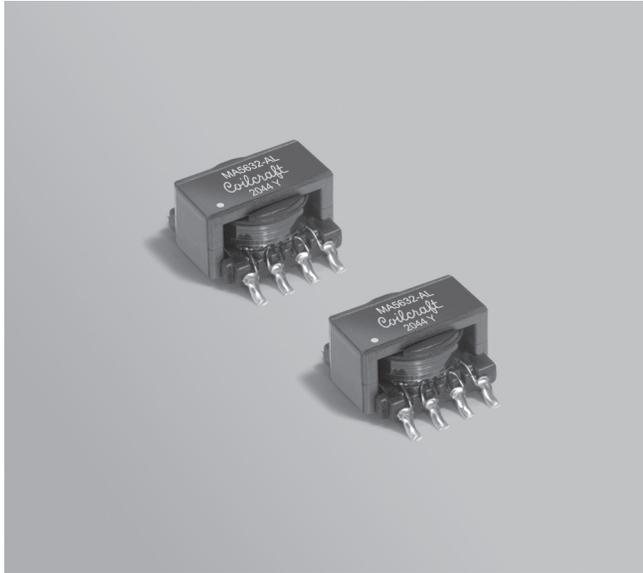

- Developed to work with Texas Instruments SN6501 Transformer Driver for Isolated Power Supplies
- Center tapped primary and secondary windings
- Designed to meet UL/CSA/IEC 60950 Basic Insulation with 1.5 mm creepage and clearance.

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 0.98 g

Ambient temperature -40°C to +125°C

Storage temperature Component: -40°C to +125°C.

Tape and reel packaging: -40°C to +80°C

Isolation 2500 Vrms, one minute, winding to winding

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 600/13" reel Plastic tape: 24 mm wide, 0.37 mm thick, 16 mm pocket spacing, 6.1 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

| Part number ¹ | Pri/sec voltage | Inductance ² min (µH) | DCR max (Ohms) ³ | | Leakage inductance ⁴ max (µH) | Volt-time product ⁵ (V-µsec) | Power ⁶ (W) | Turns ratio pri : sec |
|--------------------------|-----------------|----------------------------------|-----------------------------|-------|------------------------------------------|-----------------------------------------|------------------------|-----------------------|
| | | | pri | sec | | | | |
| MA5632-AL_ | 3.3 V to 5.0 V | 17.8 | 0.086 | 0.219 | 0.464 | 17.6 | 2.0 | 1 : 2 |

1. When ordering, please specify **termination** and **packaging** codes:

MA5632-ALD

Termination: L = RoHS compliant tin-silver over tin over nickel over phos bronze.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (600 per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D.

2. Inductance is tested between pins 4 and 3 at 500 kHz, 0.5 Vrms, 0 A dc.

3. DCR is per winding.

4. Leakage inductance is for the primary with both windings connected in series and with the secondary windings shorted.


5. Based on Bsat of the core at 25°C and number of turns on winding 4-3.

6. Calculated output power based on 150 kHz operating frequency.

Power varies depending on application.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

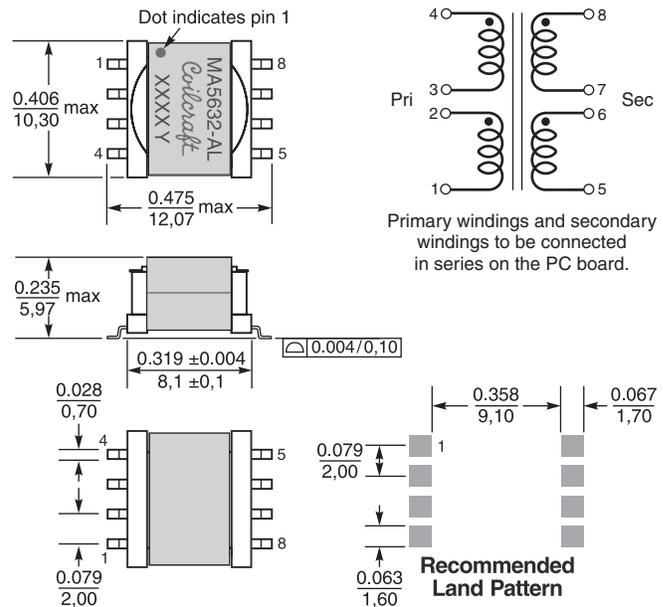

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1022 Revised 08/29/22

© Coilcraft Inc. 2022

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.