




Shielded Power Inductors – SLC1480

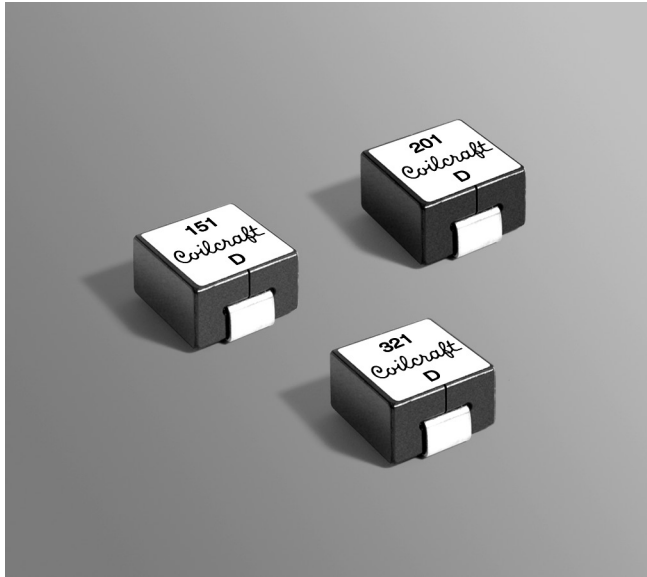

- Requires a mere quarter square inch of board space
- Handles current as high as 130 A.
- Ideal for use in multi-phase VRM/VRD regulators

Designer's Kit C467 contains 3 each of select values.

Core material Ferrite

Terminations RoHS compliant matte tin over nickel over copper. Other terminations available at additional cost.

Weight 5.25 g

Ambient temperature -40°C to $+85^{\circ}\text{C}$ with (40°C rise) Irms current.

Maximum part temperature $+125^{\circ}\text{C}$ (ambient + temp rise). [Derating](#).

Storage temperature Component: -40°C to $+125^{\circ}\text{C}$.

Tape and reel packaging: -40°C to $+80^{\circ}\text{C}$

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)

Packaging 500/13" reel; Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 8.1 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).


Part number ¹	Inductance ² $\pm 20\%$ (nH)	DCR $\pm 17\%$ ³ (mOhms)	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
SLC1480-111MLD	110	0.18	130	110	128	130	64	83
SLC1480-131MLD	130	0.18	110	97	110	112	64	83
SLC1480-151MLD	150	0.18	108	88	95	97	64	83
SLC1480-171MLD	170	0.18	75	80	87	90	64	83
SLC1480-201MLD	200	0.18	68	65	72	76	64	83
SLC1480-231MLD	230	0.18	59	57	64	67	64	83
SLC1480-261MLD	260	0.18	50	50	57	61	64	83
SLC1480-301MLD	300	0.18	46	42	49	52	64	83
SLC1480-321MLD	320	0.18	42	38	44	48	64	83
SLC1480-441MLD	440	0.18	35	28	32	35	64	83

1. **Packaging:** **D** = 13" machine-ready reel. EIA-481 embossed plastic tape (500 per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

B = In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D.

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4284.

3. DCR is measured between the two points indicated below.



▲Points used for measuring DCR

4. SRF measured using an Agilent/HP 8753ES network analyzer or equivalent.

5. DC current at 25°C that causes the specified inductance drop from its value without current. [Click for temperature derating information](#).

6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. Temperature rise is highly dependent on many factors including pcb land pattern, trace size, air flow, and proximity to other components. Therefore temperature rise should be verified in application conditions. [Click for temperature derating information](#).


7. Electrical specifications at 25°C .

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.








Shielded Power Inductors – SLC1480 Series

L vs Current

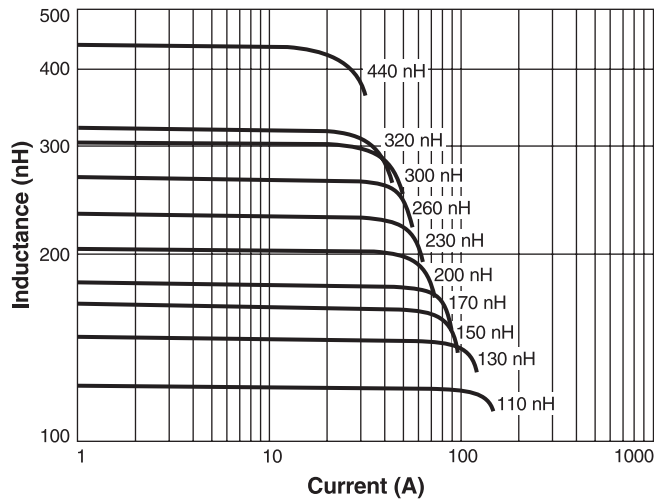

L vs Frequency

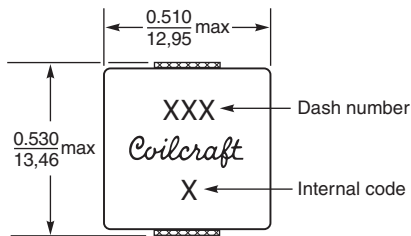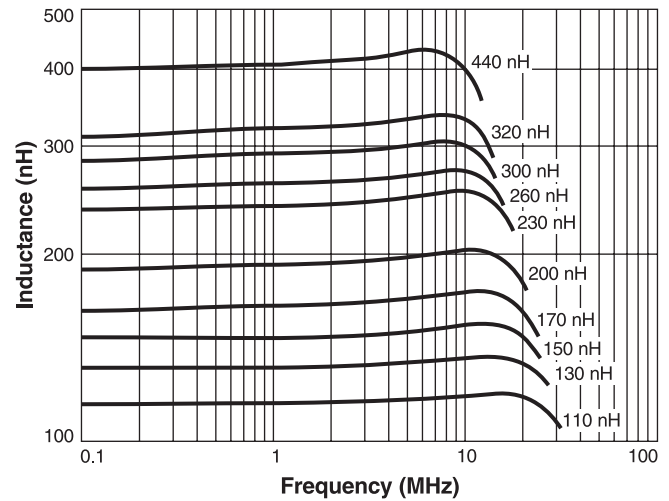

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Recommended Land Pattern



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 482-2 Revised 03/11/26
 © Coilcraft Inc. 2026
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.