

NEW!

Power Injection Chokes for PoC 1210POC



- Optimized for AEC-Q200 power over coax (PoC) applications
- Small size to reduce board area of overall system solutions
- High impedance ($\geq 1\text{k}\Omega$) maintained over a wide band frequency range to isolate AC signal from the DC power
- AEC-Q200 Grade 1 qualified (-40°C to $+125^\circ\text{C}$ ambient)

Core material Ferrite**Environmental** RoHS compliant, halogen free**Terminations** RoHS compliant matte tin over nickel over silver-platinum-glass frit.**Weight** 115 – 125 mg**Ambient temperature** -40°C to $+125^\circ\text{C}$ with (15°C rise) Irms current.**Maximum part temperature** $+140^\circ\text{C}$ (ambient + temp rise).**Storage temperature** Component: -40°C to $+140^\circ\text{C}$.Tape and reel packaging: -40°C to $+80^\circ\text{C}$ **Resistance to soldering heat** Max three 40 second reflows at $+260^\circ\text{C}$, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at $<30^\circ\text{C}$ / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	L^2 $\pm 20\%$ (μH)	DCR (Ohms) ³		SRF typ ⁴ (MHz)	Isat (mA) ⁵					Irms typ (mA)		
		typ	max		25°C	85°C	105°C	125°C	140°C	at 25°C ⁶	at 85°C ⁷	at 125°C ⁸
1210POC-222MR_	2.2	0.10	0.13	300	2200	1900	1700	1500	1300	1900	1730	1000
1210POC-682MR_	6.8	0.20	0.24	120	1400	1000	930	800	700	1360	1230	800
1210POC-103MR_	10.0	0.29	0.34	95	1100	850	760	660	560	1130	1020	570
1210POC-223MR_	22.0	0.76	0.88	70	720	580	520	450	390	700	630	400

1. When ordering, please specify **packaging** code:**1210POC-223MRC****Packaging:** **C** = 7" machine-ready reel. EIA-481 embossed plastic tape. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge). See dimensional drawing for packaging information.**D** = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked. See dimensional drawing for packaging information.

2. Inductance tested at 100 kHz, 0.1 Vrms, 200 mA DC using HP4263 w/SMD-B test fixture or equivalent

3. DCR measured using a micro-ohmmeter.

4. SRF measured using an Agilent/HP 5071C network analyzer and a Coilcraft SMD-D test fixture.

5. DC current that causes 30% inductance drop from its initial value at 200 mA at specified temperature.

6. Current that causes a 40°C rise at 25°C .7. Current that causes a 40°C rise at 85°C .8. Current that causes a 15°C rise at 125°C .9. Electrical specifications at 25°C .

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com**UK** +44-1236-730595 sales@coilcraft-europe.com**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw**China** +86-21-6218 8074 sales@coilcraft.com.cn**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1585-1 Revised 06/10/20





© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



1210POC Power Injection Chokes for PoC

L vs Current

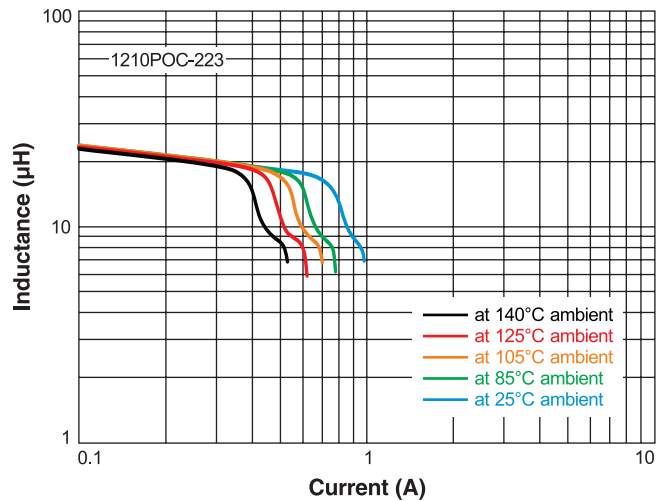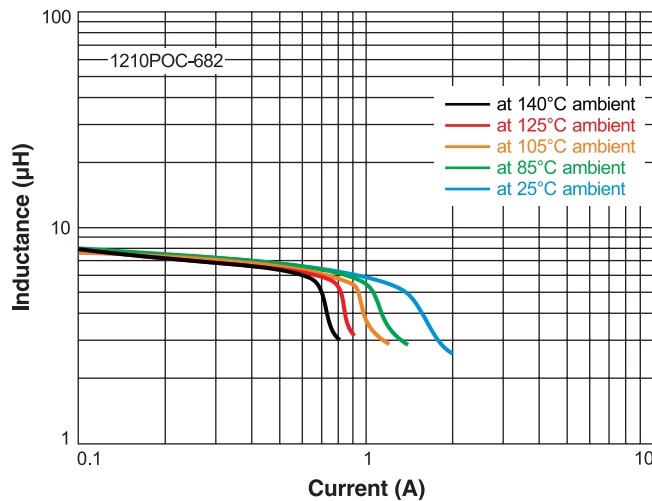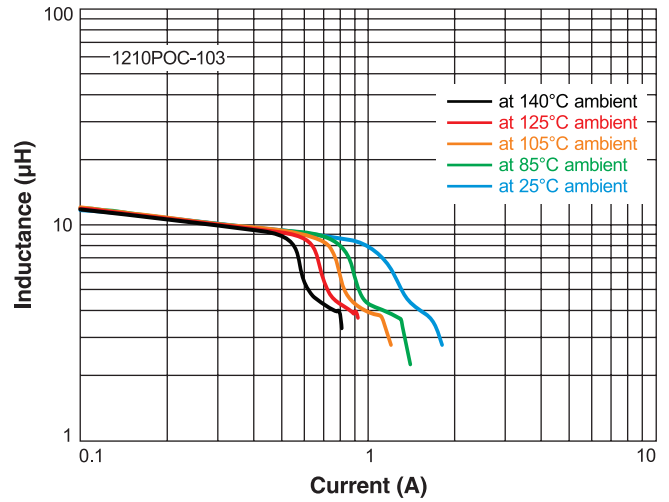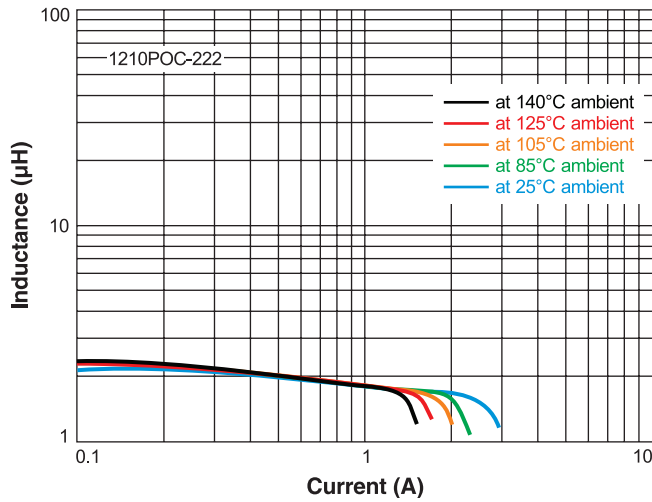





US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1585-2 Revised 06/10/20
 © Coilcraft Inc. 2020
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




1210POC Power Injection Chokes for PoC

Impedance vs Frequency

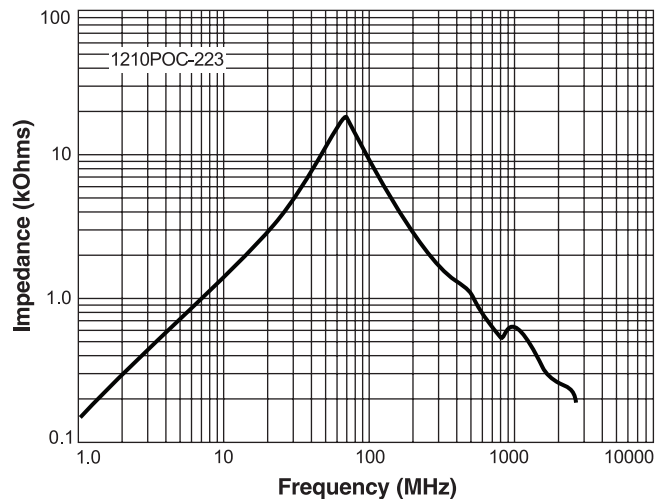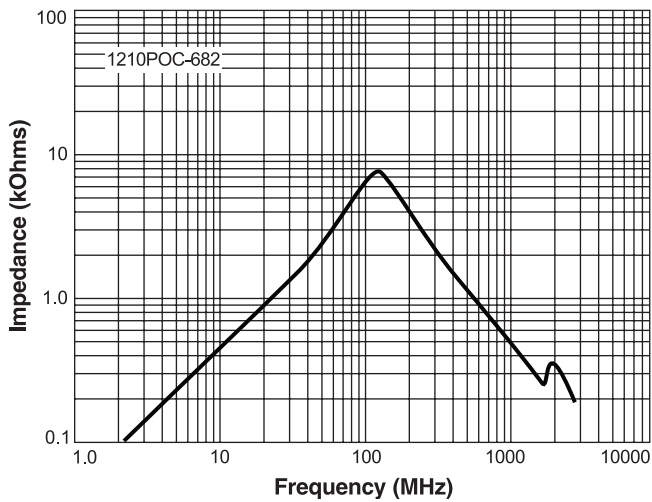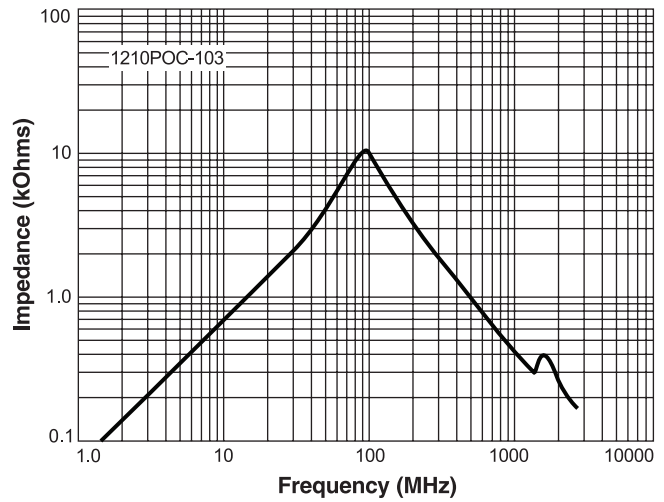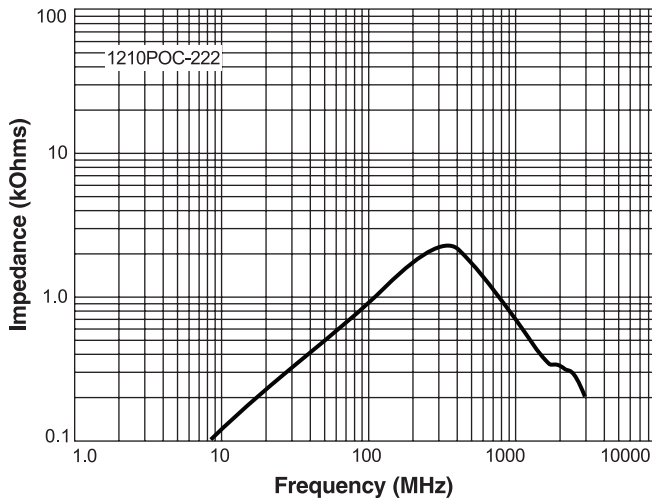

Dimensions – 1210POC

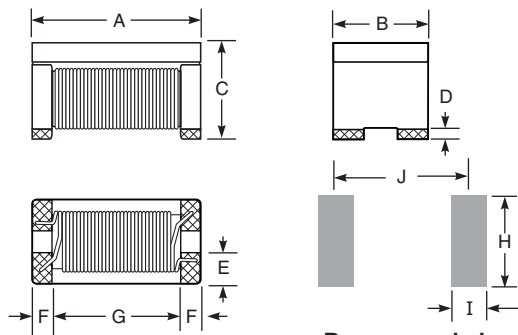

Recommended Land Pattern

A max	B max	C max	D	E	F	G	H	I	J
0.13	0.105	0.118	0.004	0.037	0.020	0.080	0.104	0.026	0.100
3,30	2,67	3,00	0,10	0,94	0,51	2,03	2,65	0,65	2,54
in									
mm									

Packaging 750/7" reel; 3000/13" reel; Plastic tape: 12 mm wide, 0.25 mm thick, 8 mm pocket spacing, 2.72 mm pocket depth



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1585-3 Revised 06/10/20
 © Coilcraft Inc. 2020
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.