


NEW!

Isolation Transformer

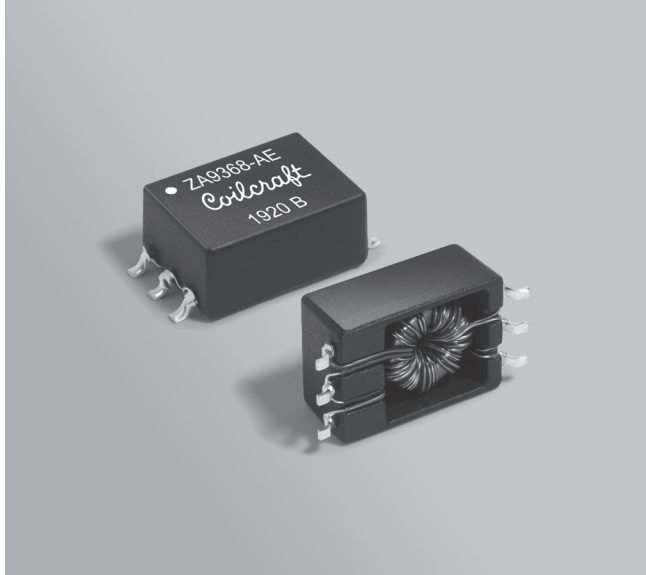

- Optimized for Texas instrument SN6505 transformer driver
- Designed to meet UL/CSA/IEC 60950 Reinforced Insulation Class with 8 mm creepage and 4.5 mm clearance
- Low profile and center-tapped push-pull transformers for isolated power supply
- 3500 Vrms, one minute high isolation (hipot) winding to winding

Core material Ferrite

Terminations RoHS tin-silver-copper over tin over nickel over phos bronze.

Weight 0.9 g

Ambient temperature -40°C to +125°C

Maximum part temperature +155°C (ambient + temp rise)

Storage temperature Component: -40°C to +125°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)



Packaging 650 per 13" reel Plastic tape: 24 mm wide, 0.4 mm thick, 12 mm pocket spacing, 6.6 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Input voltage (V)	L ² at 0 A ±25% (µH)	Leakage L ³ max (µH)	DCR max (Ohms)		Turns ratio pri:sec	Volt-time product ⁴ (V-µsec)	Isolation ⁵ (Vrms)	Output ⁶
ZA9368-AED	3.3	256	0.4	0.182	0.395	1 : 1.75	16	3500	5 V, 700 mA

- Packaging:** D = 13" machine ready reel. EIA-481 embossed plastic tape. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
- Inductance is for primary windings measured at 10 kHz, 0.01 Vrms, 0 Adc.
- Leakage inductance measured between pins 1 and 3 at 100 kHz, 0.1 Vrms with secondary pins shorted.
- Volt-time product is for the primary, between pin 1 and 3.
- One minute isolation (hipot) primary windings to secondary windings.
- Maximum output current of 700 mA causes 40°C temperature rise from ambient.
- Capacitance is 6 pF ±10%, measured from primary to secondary.
- Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

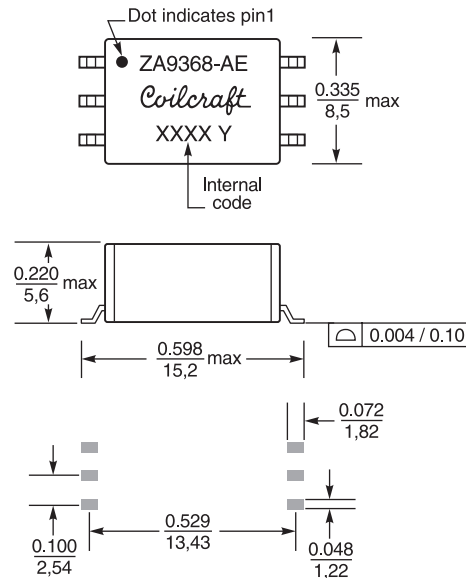

Recommended Land Pattern

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1592-1 Revised 10/08/21

© Coilcraft Inc. 2021

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.