


NEW!

No-opto Flyback Transformers

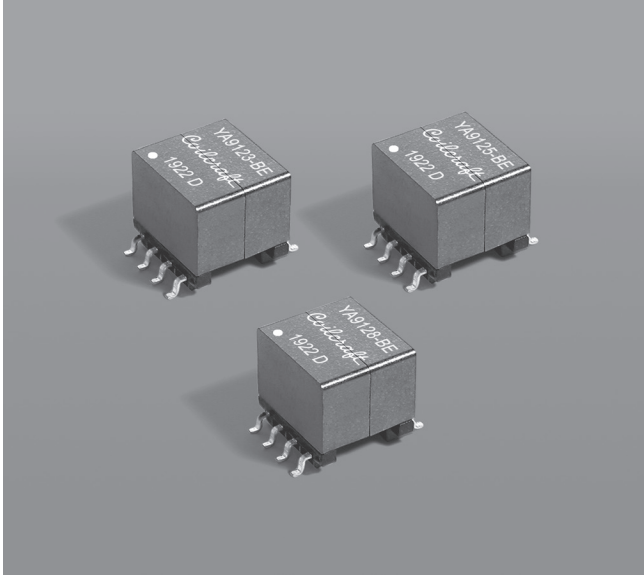

- Discontinuous conduction mode Flyback transformers
- Optimized for 125 – 150 kHz with 8 – 28 V or 18 – 60 V input
- 1500 Vrms, one minute isolation between primary and secondary

Core material Ferrite**Terminations** RoHS tin-silver-copper over tin over nickel over phos bronze. Other terminations available at additional cost.**Weight** 2.65 – 2.75 g**Ambient temperature** –40°C to +85°C**Max Part Temperature** +125°C (ambient + temperature rise)**Storage temperature** Component: –40°C to +125°C

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**


38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Inductance at 0 A ² ±10% (µH)	Isat ³ (A)	DCR max (Ohms)		Leakage inductance max (µH) ⁴	Turns ratio pri : sec	Isolation ⁵ (Vrms)	Power (W)	Output
			pri	sec					
8 – 28 V input									
YA9123-BED	8	5.9	0.025	0.024	0.124	1 : 0.751	1500	6	5 V, 1.2 A
YA9124-BED	8	5.9	0.025	0.125	0.124	1 : 1.625	1500	6	12 V, 0.5 A
YA9125-BED	8	5.9	0.025	0.306	0.100	1 : 3.125	1500	6	24 V, 0.25 A
18 – 60 V input									
YA9126-BED	40	2.3	0.095	0.020	0.460	1 : 0.313	1500	6	5 V, 1.2 A
YA9127-BED	40	2.3	0.095	0.090	0.353	1 : 0.750	1500	6	12 V, 0.5 A
YA9128-BED	40	2.3	0.095	0.260	0.350	1 : 1.375	1500	6	24 V, 0.25 A


- Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape (350 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
 - Inductance is for the primary, measured at 150 kHz, 0.1 Vrms, 0 Adc.
 - DC current that causes the primary inductance drop 30% from its value without current. [Click for temperature derating information.](#)
 - Leakage Inductance is for the primary, measured with secondary windings shorted together.
 - 1500 Vrms, one minute isolation (hipot) between windings.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Schematics

YA9124, YA9125,
YA9127, YA9128

*Connect pin 1 to 2 and pin 3 to 4 on the PC board

YA9123, YA9126





*Connect pin 1 to 2, 3 to 4, 5 to 6, and pin 7 to 8 on the PC board




No-opto Flyback Transformers

L vs Current

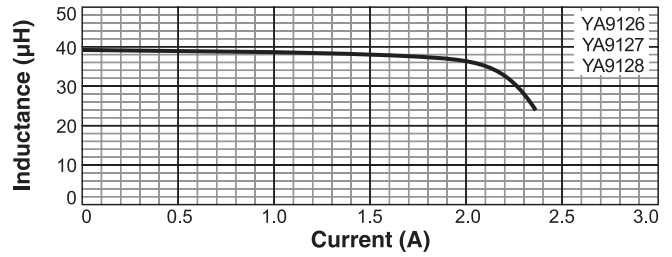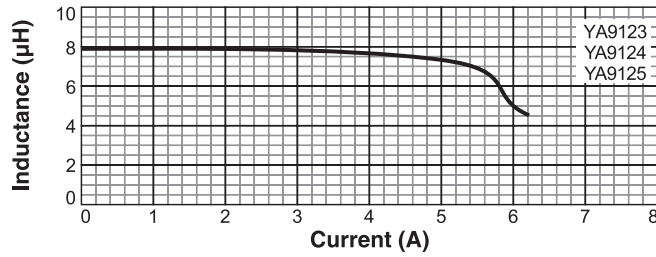

Dimensions

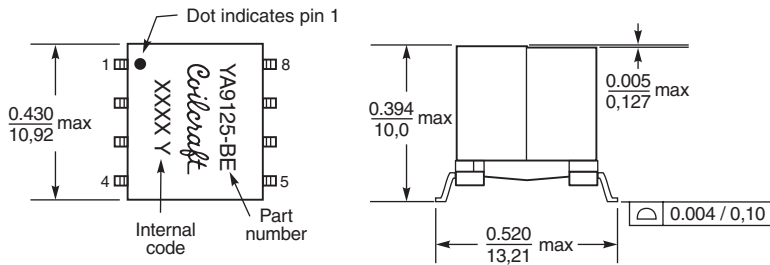

Recommended

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Packaging 350/13" reel Plastic tape: 24 mm wide, 0.50 mm thick, 16 mm pocket spacing, 10.35 mm pocket depth



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1594-2 Revised 02/17/20

© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.