

NEW!

Shielded Power Inductors - LPS4040



- Very low DCR; excellent current handling
- 4.0 × 4.0 mm footprint; less than 4 mm tall
- AEC-Q200 Grade 1 (–40°C to +125°C)

Core material Ferrite**Core and winding loss** See www.coilcraft.com/coreloss**Environmental** RoHS compliant, halogen free**Terminations** RoHS compliant matte tin over nickel over silver. Other terminations available at additional cost.**Weight** 200 mg**Ambient temperature** –40°C to +125°C with (40°C rise) Irms current.**Maximum part temperature** +165°C (ambient + temp rise). Derating.**Storage temperature** Component: –40°C to +165°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Recommended pick and place nozzle OD: 4 mm; ID: ≤ 2 mm**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Inductance ² 20% (µH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
LPS4040-223MR_	22	0.210	24.0	0.620	0.780	0.830	0.850	1.200
LPS4040-683MR_	68	0.410	9.50	0.440	0.490	0.510	0.700	0.920
LPS4040-823MR_	82	0.465	8.90	0.370	0.420	0.440	0.650	0.880
LPS4040-104MR_	100	0.475	8.60	0.350	0.380	0.400	0.560	0.820
LPS4040-124MR_	120	0.530	7.30	0.330	0.360	0.380	0.500	0.740
LPS4040-154MR_	150	0.680	6.10	0.275	0.305	0.320	0.490	0.650
LPS4040-224MR_	220	0.880	4.80	0.230	0.250	0.265	0.430	0.580
LPS4040-334MR_	330	1.40	4.10	0.190	0.205	0.215	0.360	0.480
LPS4040-474MR_	470	2.16	2.90	0.150	0.170	0.180	0.270	0.370
LPS4040-564MR_	560	2.35	2.80	0.140	0.160	0.165	0.240	0.330
LPS4040-684MR_	680	3.00	2.60	0.130	0.145	0.150	0.220	0.300
LPS4040-105MR_	1000	4.02	2.00	0.105	0.115	0.120	0.200	0.270
LPS4040-155MR_	1500	6.23	1.65	0.082	0.092	0.098	0.160	0.220
LPS4040-185MR_	1800	7.77	1.49	0.074	0.084	0.090	0.140	0.190
LPS4040-225MR_	2200	8.80	1.36	0.068	0.078	0.082	0.125	0.170
LPS4040-335MR_	3300	16.4	1.10	0.058	0.064	0.068	0.100	0.140
LPS4040-475MR_	4700	22.3	0.900	0.046	0.054	0.056	0.080	0.110
LPS4040-565MR_	5600	30.0	0.770	0.042	0.048	0.051	0.070	0.100

1. Please specify **termination** and **packaging** codes:

LPS4040-565MRC

Termination: R= RoHS compliant matte tin over nickel over silver.
Special order, added cost:
Q = RoHS tin-silver-copper (95.5/4/0.5)
or P = non-RoHS tin-lead (63/37).

Packaging: C= 7" machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

D=13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (1500 parts per full reel).

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A. Inductance at 1 MHz is the same for parts with SRF ≥ 10 MHz.
3. DCR measured on a micro-ohmmeter.
4. SRF measured using Agilent/HP 8753ES or equivalent.
5. DC current at 25°C that causes the specified inductance drop from its value without current.
[Click for temperature derating information.](#)
6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
[Click for temperature derating information.](#)
7. Electrical specifications at 25°C.
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1540-1 Revised 02/19/20


© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.





Shielded SMT Power Inductors – LPS4040 Series

Typical L vs Current

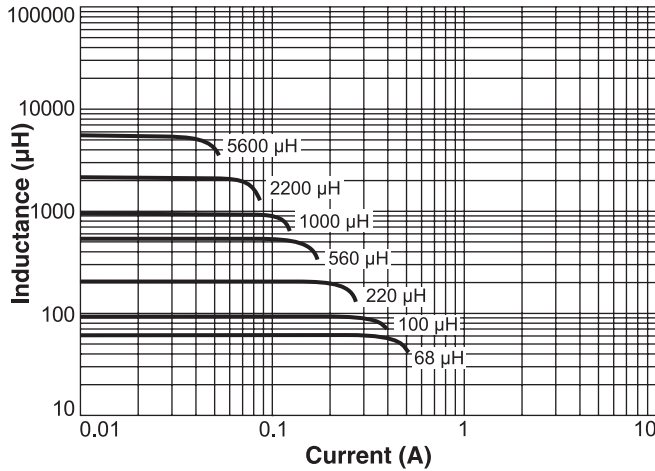

Typical L vs Frequency

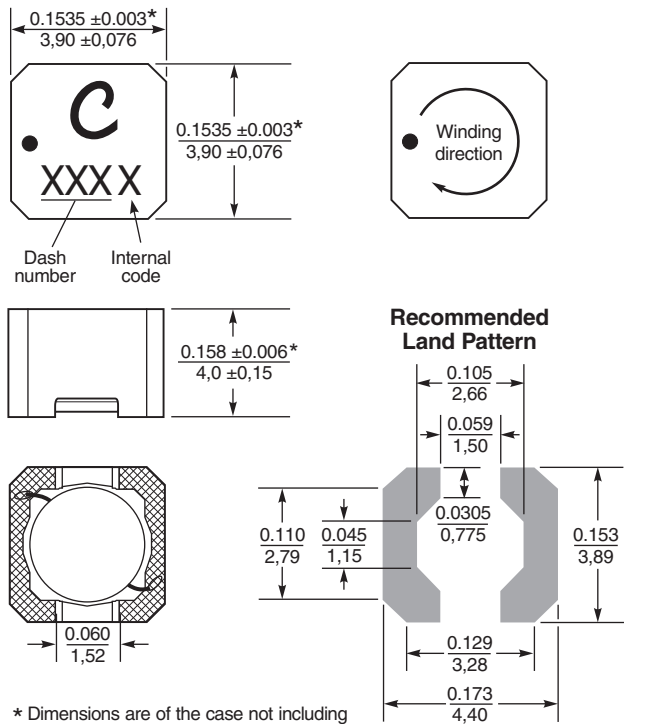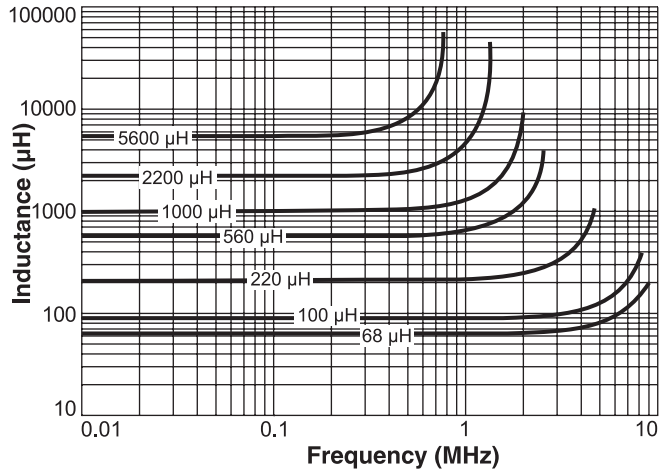

* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.005 in / 0,13 mm.
For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.005 inch / 0,13 mm).

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Packaging 500/7" reel; 1500/13" reel Plastic tape: 12 mm wide, 0.30 mm thick, 8 mm pocket spacing, 4.32 mm pocket depth



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1540-2 Revised 02/19/20
 © Coilcraft Inc. 2020
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.