


15 W Forward Mode Transformers

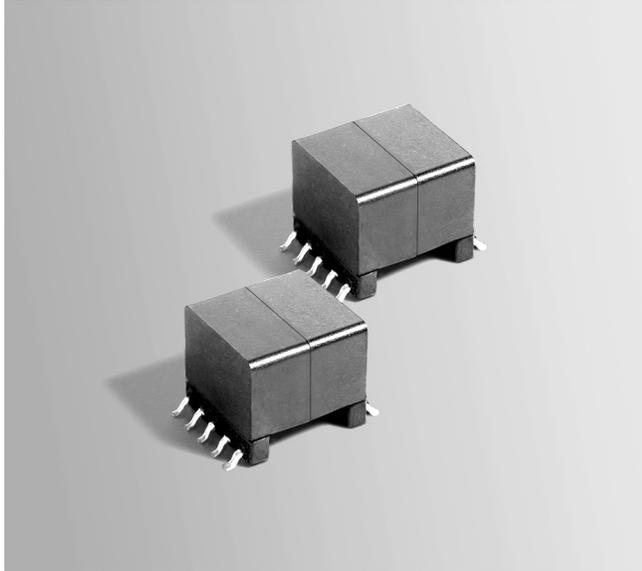

- Designed for two-switch forward topology operating at 250 kHz
- Five different outputs from 3.3 V to 15 V; 36 – 75 V input
- 1500 Vrms, one minute isolation from primary and aux to the secondary

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 6.9 – 7.1 g

Ambient temperature –40°C to +85°C

Storage temperature Component: –40°C to +85°C.
Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 175 per 13" reel Plastic tape: 32 mm wide, 0.5 mm thick, 28 mm pocket spacing, 12.93 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf.

Part number ¹	Inductance ² nom (µH)	DCR max (mOhms) ³			Leakage inductance ⁴ max (µH)	Input voltage range (V)	Turns ratio ⁵		Output ⁶
		pri	sec	aux			pri : sec	pri : aux	
FCT1-33M2SL_	705	55	6.0	320	0.510	36 – 75	1 : 0.24	1 : 0.67	3.3 V, 4.6 A
FCT1-50M2SL_	705	55	13.5	320	0.425	36 – 75	1 : 0.33	1 : 0.67	5.0 V, 3.0 A
FCT1-90M2SL_	705	55	33.5	320	0.340	36 – 75	1 : 0.57	1 : 0.67	9.0 V, 1.67 A
FCT1-120M2SL_	705	55	46.5	320	0.340	36 – 75	1 : 0.71	1 : 0.67	12 V, 1.25 A
FCT1-150M2SL_	705	55	72.5	320	0.310	36 – 75	1 : 0.90	1 : 0.67	15 V, 1.0 A


1. When ordering, please specify a **packaging** code:

FCT1-50M2SLD




Packaging: **D** = 13" machine ready reel. EIA-481 embossed plastic tape (175 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D..

- Inductance is measured at 250 kHz, 0.5 Vrms, 0 Adc.
 - DCR for the secondary is measured with the windings connected in parallel.
 - Leakage inductance is for the primary and is measured with the secondary shorted.
 - Turns ratio is with the secondary windings connected in parallel.
 - Output is with the secondary windings connected in parallel. Auxiliary winding output is 10 V, 20 mA.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

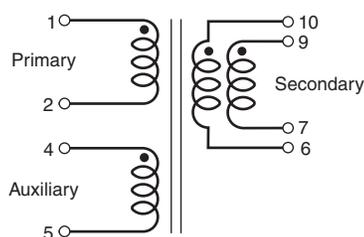

Secondary windings to be connected in parallel on PCB board.

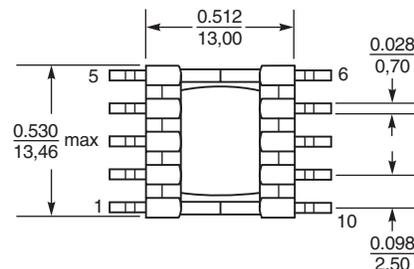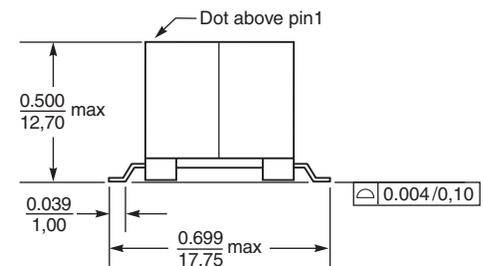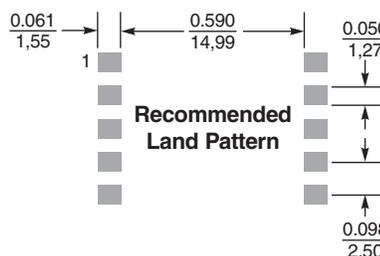

Coilcraft
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 635 Revised 02/18/09

© Coilcraft Inc. 2021

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.