











# Shielded Coupled Inductors LPD5010

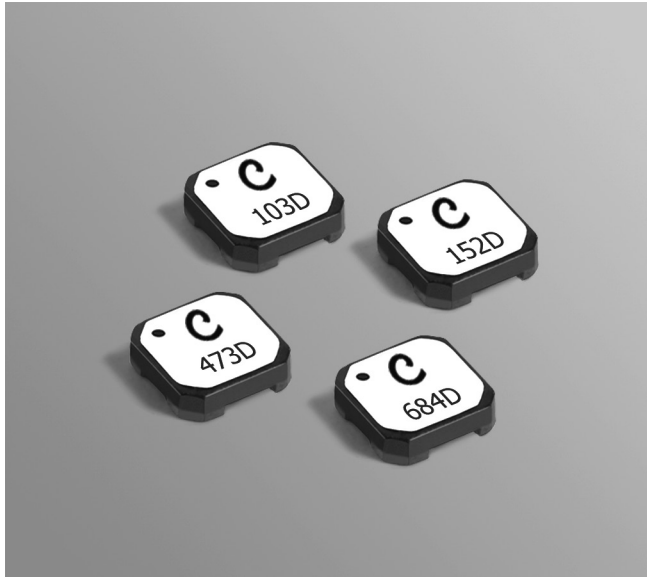

The LPD5010 coupled miniature shielded inductors are mere 1 mm high and 5 mm square. They are ideal for use in a variety of circuits including flyback, multi-output buck, SEPIC and Zeta.

These inductors provide high inductance, high efficiency and excellent current handling in a rugged, low cost part.

They can also be used as two single inductors connected in series or parallel or as a common mode choke.

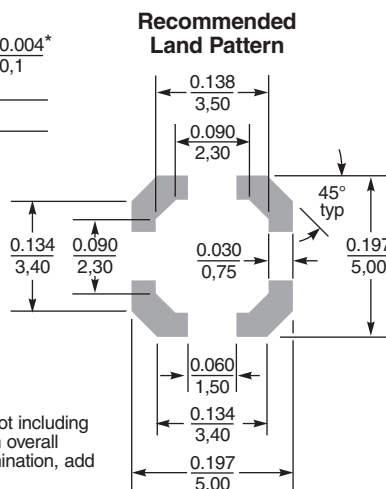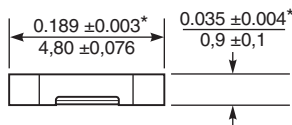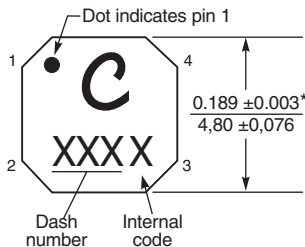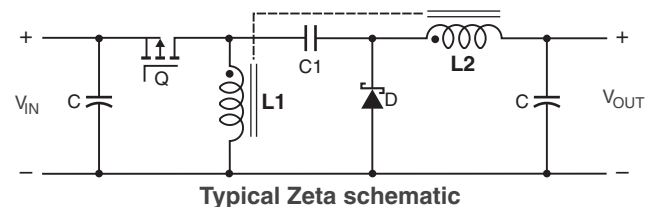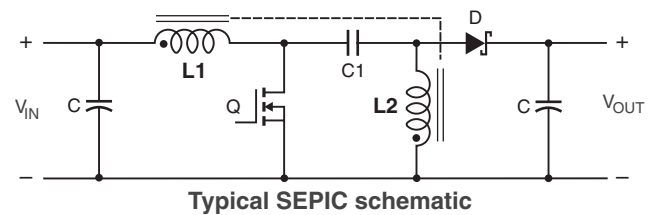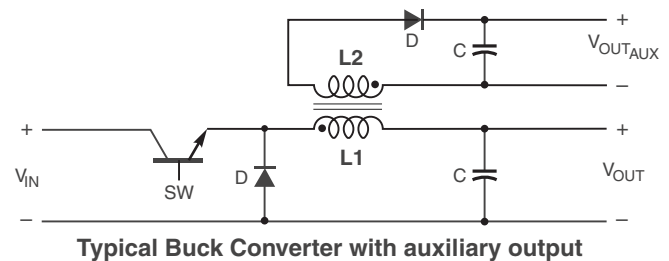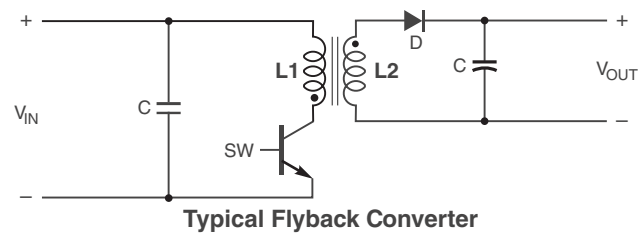

\* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.005 in / 0.13 mm.

For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.005 in / 0.13 mm.

Dimensions are in inches mm



**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 820-1 Revised 07/13/16  
 © Coilcraft Inc. 2016  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



# Coupled Inductors for SEPIC Applications – LPD5010 Series

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR max <sup>3</sup> (Ohms)	SRF typ <sup>4</sup> (MHz)	Coupling coefficient typ	Leakage L typ <sup>5</sup> (µH)	Isat (A) <sup>6</sup>			Irms (A)	
						10% drop	20% drop	30% drop	both windings <sup>7</sup>	one winding <sup>8</sup>
LPD5010-681MR_	0.68	0.07	191	0.95	0.07	2.6	2.7	2.8	1.95	2.76
LPD5010-102MR_	1.0	0.10	150	0.95	0.09	2.1	2.1	2.2	1.50	2.12
LPD5010-152MR_	1.5	0.15	134	0.97	0.09	1.7	1.8	1.8	1.20	1.70
LPD5010-222MR_	2.2	0.20	108	0.97	0.11	1.5	1.6	1.6	1.10	1.56
LPD5010-332MR_	3.3	0.27	83	0.98	0.13	1.2	1.3	1.3	0.95	1.34
LPD5010-472MR_	4.7	0.40	68	0.98	0.15	0.98	1.0	1.1	0.75	1.06
LPD5010-562MR_	5.6	0.45	60	0.99	0.16	0.90	0.93	0.94	0.70	0.99
LPD5010-682MR_	6.8	0.53	55	0.99	0.19	0.83	0.86	0.87	0.60	0.85
LPD5010-822MR_	8.2	0.70	50	0.99	0.22	0.74	0.77	0.78	0.50	0.71
LPD5010-103MR_	10	0.78	46	0.99	0.27	0.67	0.69	0.70	0.50	0.71
LPD5010-153MR_	15	1.19	33	0.99	0.34	0.53	0.55	0.56	0.42	0.59
LPD5010-223MR_	22	1.58	26	0.99	0.40	0.45	0.47	0.48	0.35	0.49
LPD5010-333MR_	33	2.50	23	0.99	0.48	0.37	0.38	0.39	0.30	0.42
LPD5010-473MR_	47	3.48	17.0	0.99	0.63	0.31	0.32	0.33	0.25	0.35
LPD5010-683MR_	68	5.10	14.9	0.99	0.90	0.25	0.26	0.27	0.19	0.26
LPD5010-104MR_	100	8.0	11.2	0.99	1.39	0.21	0.22	0.22	0.15	0.21
LPD5010-154MR_	150	11.7	9.90	0.99	2.10	0.17	0.17	0.18	0.12	0.16
LPD5010-224MR_	220	15.2	8.05	0.99	3.02	0.14	0.15	0.15	0.11	0.15

1. Please specify **termination** and **packaging** codes:

#### LPD5010-224MRC

**Termination: R** = RoHS compliant matte tin over nickel over silver.

Special order:

**Q** = RoHS tin-silver-copper (95.5/4/0.5) or

**P** = non-RoHS tin-lead (63/37).

**Packaging: C** = 7" machine-ready reel. EIA-481 embossed plastic tape (1000 parts per full reel).

**B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

**D** = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (3500 parts per full reel).

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- Leakage Inductance is for L1 and is measured with L2 shorted.
- DC current at 25°C that causes the specified inductance drop from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. [Go to online calculator.](#)

**Core material** Ferrite

**Core and winding loss** [Go to online calculator](#)

**Weight** 60 – 70 mg

**Environmental** RoHS compliant, halogen free

**Terminations** RoHS compliant matte tin over nickel over silver.

Other terminations available at additional cost.

**Ambient temperature** –40°C to +85°C with (40°C rise) Irms current.

**Maximum part temperature** +125°C (ambient + temp rise).

**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

**Winding to winding isolation** 100 Vrms

**Resistance to soldering heat** Max three 40 second reflows at

+260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Mean Time Between Failures (MTBF)** 26,315,789 hours

**Packaging** 1000/7" reel; 3500/13" reel Plastic tape: 12 mm wide,

0.3 mm thick, 8 mm pocket spacing, 1.02 mm pocket depth

**Recommended pick and place nozzle** OD: 5 mm; ID: ≤ 2.5 mm

**PCB washing** Tested with pure water or alcohol only. For other solvents, see [Doc787\\_PCB\\_Washing.pdf](#).



www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com

**UK** +44-1236-730595 sales@coilcraft-europe.com

**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw

**China** +86-21-6218 8074 sales@coilcraft.com.cn

**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 820-2 Revised 07/13/16


© Coilcraft Inc. 2016

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




# Coupled Inductors for SEPIC Applications – LPD5010 Series

## Typical L vs Current

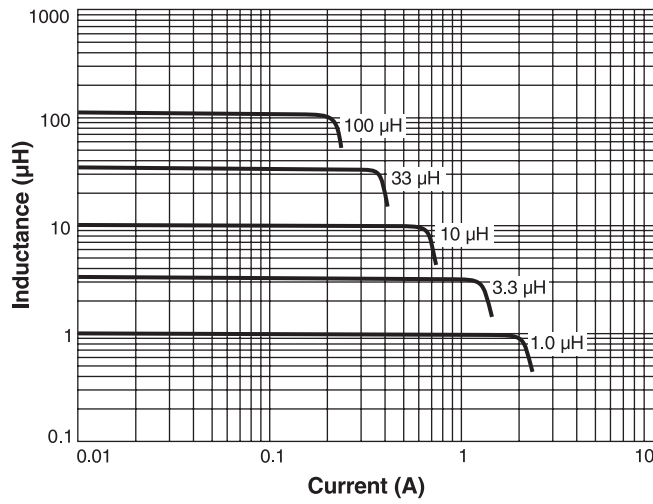

## Typical L vs Frequency

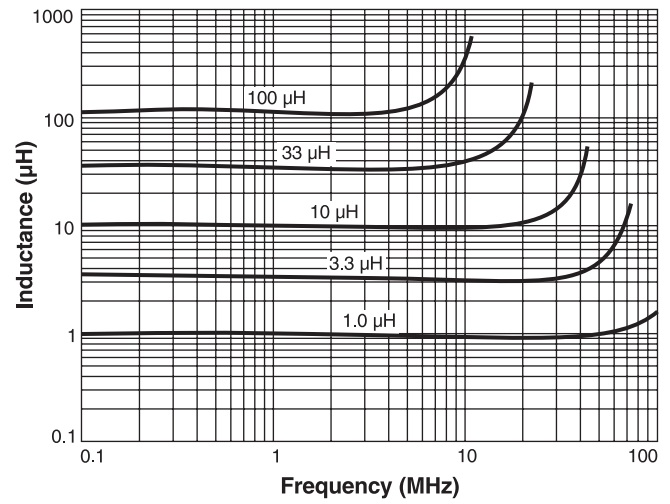

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 820-3 Revised 07/13/16  
 © Coilcraft Inc. 2016  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.