


Flyback Transformers

For Texas Instruments

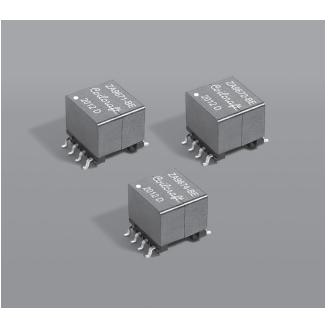

- Five output versions optimized for typical design applications of TI's LM25184 flyback converter
- Designed to operate up to 300 kHz with 4 42 V input
- 1500 Vrms, one minute isolation between primary and secondary
- AEC-Q200 Grade 3 (-40°C to +85°C)

Core material Ferrite

Environment RoHS compliant, halogen free

Terminations RoHS tin-silver-copper over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 2.73 - 2.80 g

Ambient temperature -40°C to +85°C

Max Part Temperature +125°C (ambient + temperature rise)

Storage temperature Component: -40°C to +125°C Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787_PCB_Washing.pdf.

Part number ¹	L at 0 A² ±10% (µH)	L min at 5 A³ (µH)	Leakage inductance max (µH) ⁴	-	R max hms) Sec	Turns ratio pri : sec	lsolation ^₅ (Vrms)	Power (W)	Output
ZA9670-BED	9	8.1	0.40	0.047	0.0110	4:1	1500	11.55	3.3 V, 3.5 A
ZA9671-BED	9	8.1	0.25	0.047	0.0145	3:1	1500	12.5	5 V, 2.5 A
ZA9672-BED	7	6.3	0.10	0.035	0.0480	1:1	1500	12	12 V, 1 A
ZA9673-BED	7	6.3	0.10	0.035	0.1380	1:2	1500	12	24 V, 0.5 A
ZA9674-BED	9	8.1	0.15	0.047	1.1060	1:3	1500	12	48 V, 0.25 A

1. Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape (350 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

- 2. Inductance is for the primary, measured at 300 kHz, 0.1 Vrms, 0 Adc.
- 3. Inductance is for the primary, measured at 300 kHz, 0.1 Vrms, 5 Adc.


4. Leakage Inductance is for the primary, measured with secondary windings shorted together.

5. 1500 Vrms, one minute isolation (hipot) from primary to secondary.

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Schematic



Connect pin 1 to 2, pin 3 to 4, pin 5 to 6, and pin 7 to 8 on the PC board



US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw China +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1628-1 Revised 11/16/21


© Coilcraft Inc. 2021 This product may not be used in medical or high risk applications without prior Coilcraft approval Specification subject to change without notice Please check web site for latest information



Flyback Transformers – ZA967x

Dimensions



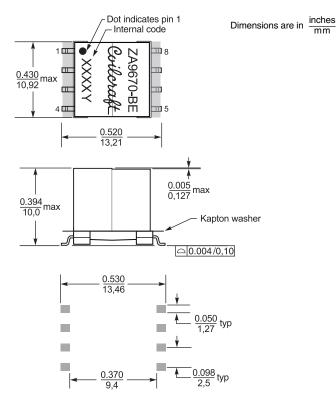

Recommended Land Pattern

Packaging 350 per 13" reel Plastic tape: 24 mm wide, 0.5 mm thick, 16 mm pocket spacing, 10.4 mm pocket depth



 US
 +1-847-639-6400
 sales@coilcraft.com

 UK
 +44-1236-730595
 sales@coilcraft-europe.com

 Taiwan
 +886-2-2264
 3646
 sales@coilcraft.com.tw

 China
 +886-21-6218
 8074
 sales@coilcraft.com.cn

 Singapore
 + 65-6484
 8412
 sales@coilcraft.com.sg

Document 1628-2 Revised 11/16/21

© Coilcraft Inc. 2021 This product may not be used in medical or high risk applications without prior Coilcraft approval Specification subject to change without notice Please check web site for latest information