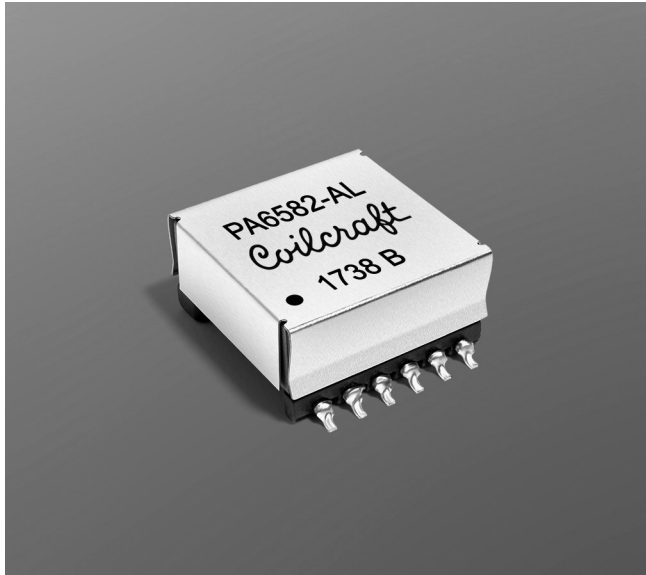


NEW!

Flyback Transformer

For TI 30 Watt PoE PSE
Reference Design PMP20588

- Designed for Texas Instruments Fully Autonomous Single Port Type 2 (30 W) PoE PSE Reference Design PMP20588.
- Operates at 150 kHz with 6–32 Volts input.
- Isolation: 1500 Vrms, one minute pri and aux to sec; 500 Vrms pri to aux

Core material Ferrite**Terminations** RoHS tin-silver-copper over tin over nickel over phos bronze.**Weight** 24.3 g**Ambient temperature** –40°C to +85°C**Maximum part temperature** +125°C (ambient + temp rise).**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C


Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 24 per tray**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number	Inductance at 0 A ¹ ±10% (µH)	Inductance at I _{pk} ² min (µH)	DCR max (Ohms)			Leakage inductance ⁴ max (µH)	Turns ratio ⁵		I _{pk} ² (A)	Output ⁶
			pri ³	sec	aux		pri:sec	pri:aux		
PA6582-AL	9.0	7.2	0.010	0.162	0.131	0.10	1:5	1:1	10.3	54 V, 0.6 A

1. Inductance is for the primary, measured at 150 kHz, 0.1 Vrms, 0 Adc.
 2. Peak primary current drawn at minimum input voltage.
 3. DCR for primary is per both windings connected in parallel.
 4. Leakage inductance is for the primary winding with the secondary windings shorted.
 5. Turns ratio is with the primary windings connected in parallel.
 6. Output of the auxiliary winding is 10.2 V.
 7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



The primary windings to be connected in parallel on the PCB board.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1429-1 Revised 12/04/17

© Coilcraft Inc. 2018

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



Flyback Transformer for Texas Instruments PMP20588

