



Toroidal Transformer – Q3903-AL



- Specified by ON Semiconductor for use with their NCP1605 PFC Controller. Referenced as X25, pulse transformer on evaluation board NCP1605FORWGEVB and Application Note AND8292.
- Recommended by Texas Instruments for use with their UC3875 Phase Shift Resonant Controller.
- Three 1:1 windings
- 500 Vrms, one minute winding-to-winding isolation.

Core material Ferrite

Terminations RoHS compliant tin-silver over tin over nickel over brass. Other terminations available at additional cost.

Weight 4.3 g

Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +85°C.
Tray packaging: -40°C to +80°C


Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 49 per tray

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

Part number	Inductance ¹ min (µH)	DCR max ² (Ohms)	Inter-winding isolation (Vrms)
Q3903-AL	210	0.090	500

1. Inductance measured between pins 1 and 6, at 15.75 kHz, 0.015 Vrms, 0 Adc using an Agilent/HP 4192A impedance analyzer.
2. DCR is per winding, measured on Cambridge Technology micro-ohmmeter or equivalent.
3. Electrical specifications at 25°C.

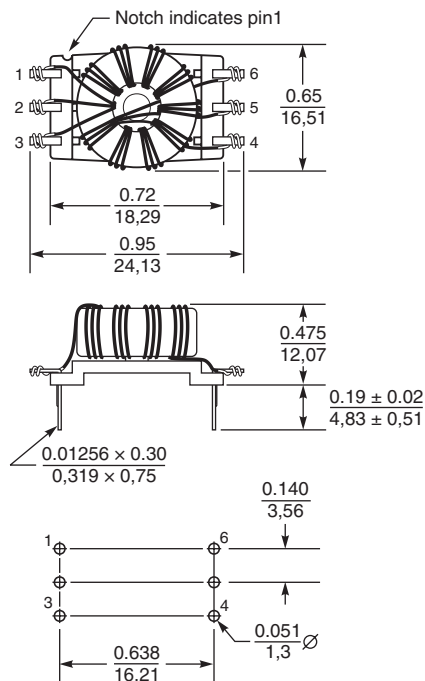

Recommended PC Board Layout

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 616 Revised 06/02/022
 © Coilcraft Inc. 2022
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.