


NEW!

Current Sense Transformer CST2010V-150L

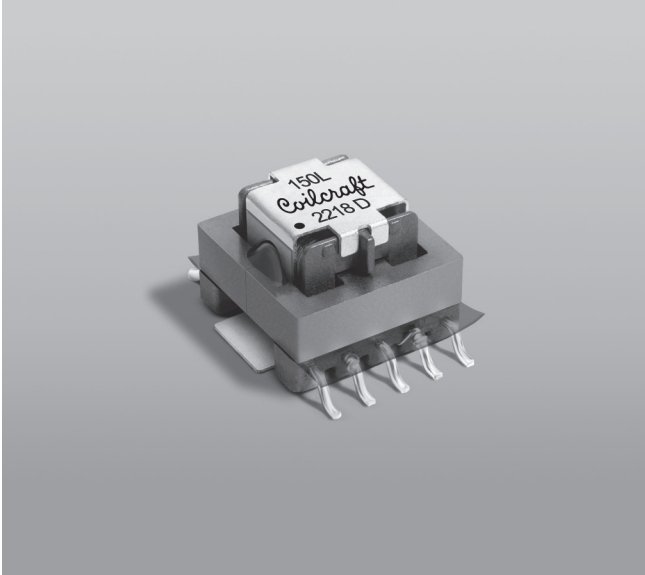

- High isolation voltage CST2010 current sense transformer
- AEC-Q200 Grade 1 (-40°C to +125°C)
- Sensed current up to 40 A
- Designed for use up to 1 MHz and above
- 2100 Vrms, one minute isolation (hipot) between windings
- Designed to comply with IEC61558-1, IEC62369-1, and IEC60664-1 for providing Reinforced or Basic Insulation⁷

Core material Ferrite

Terminations RoHS compliant tin-silver over tin over nickel over phos bronze (pins 2 - 4); RoHS compliant matte tin over nickel over copper (pins 11 - 12).

Weight 3.8 g

Ambient temperature -40°C to +125°C

Maximum part temperature +165°C (ambient + temp rise)

Storage temperature Component: -40°C to +165°C.

Tape and reel Packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)


PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Turns (N) pri:sec	Inductance ² ±30% (mH)	DCR max		Frequency (kHz)	Volt-time product ³ (Vµsec)	Sensed current I _{in} ⁴ (A)	Terminating resistance R _T ⁵ (Ohms)
			pri (mOhms)	sec (Ohms)				
CST2010V-150LD	1:150	19	0.36	3.6	1 - >1000	381.0	40	3.8


- Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
- Inductance measured between secondary pins at 1 kHz, 0.1 Vrms, 0 Adc.
- Volt-time product is for the secondary, between pin 2 and 4.
- Primary current of 40 A causes less than 40°C temperature rise from 25°C ambient. Higher current causes a greater temperature rise (see Temperature Rise vs Current curve).
- Terminating resistance (R_T) value is based on 1 Volt output with 40 Amps flowing through the primary. Varying terminating resistance increases or decreases output Voltage/Ampere according to the following equation:
 $R_T = V_{out} \times N_{sec} / I_{in}$.
- Electrical specifications at 25°C.
- 6.5 mm creepage and 2.5 mm clearance to meet reinforced insulation for working voltage up to 140 V and basic insulation for working voltage up to 500 V with material group 3, pollution degree P2, OVCII, and altitude up to 2 km.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Typical Circuit

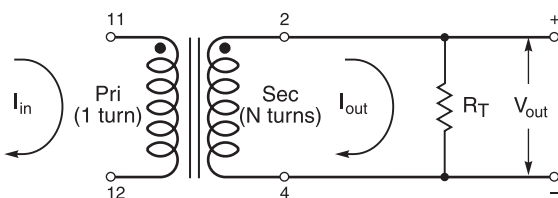



Temperature Rise vs Current

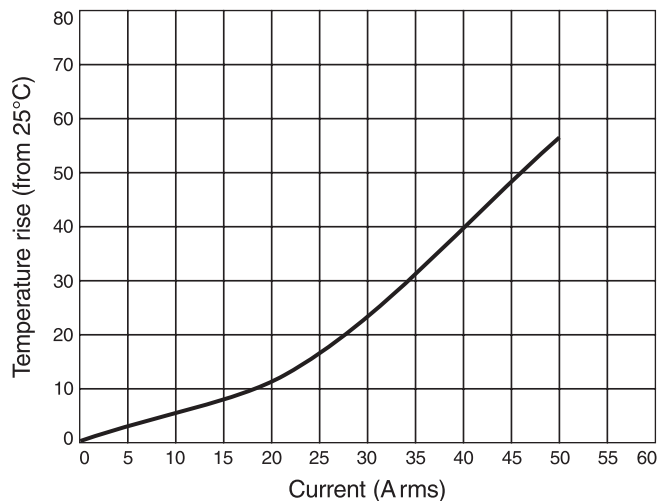



CST2010V-150L SMT Current Sense Transformer

Dimensions

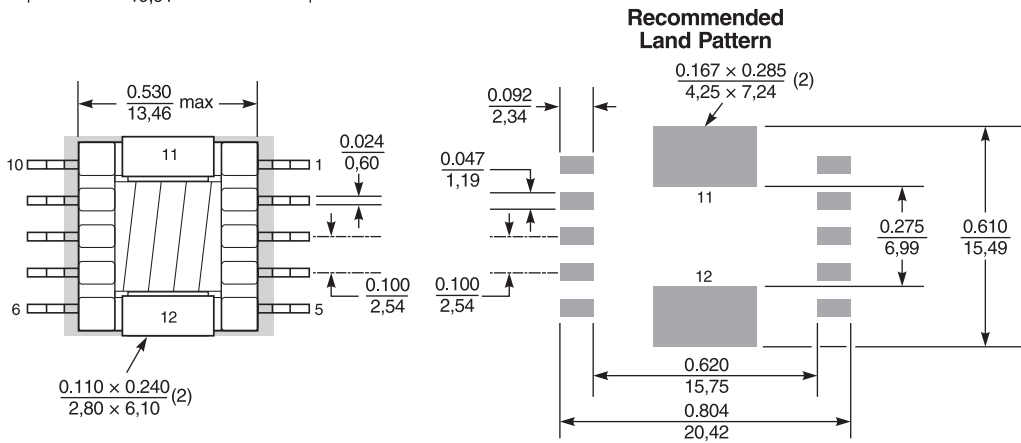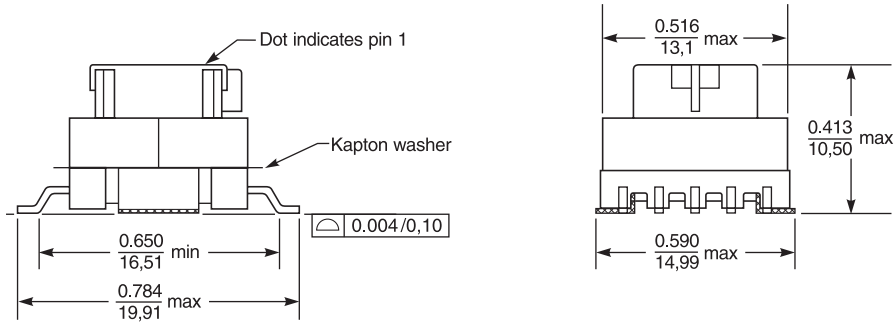

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Packaging 250/13" reel; Plastic tape: 32 mm wide, 0.5 mm thick, 20 mm pocket spacing, 11.2 mm pocket depth



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1737-2 Revised 01/04/23
 © Coilcraft Inc. 2023
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.