







# Shielded Power Inductors – XAL1350





- · High current and very low DCR
- · Soft saturation makes them ideal for VRM/VRD applications.

#### Core material Composite

**Environmental** RoHS compliant, halogen free **Terminations** RoHS compliant tin-silver over copper. Other terminations available at additional cost. **Weight** 4.5 - 4.9 g

Operating voltage: 0-60 V

Ambient temperature  $-40^{\circ}$ C to  $+125^{\circ}$ C with ( $40^{\circ}$ C rise) Irms current. Maximum part temperature  $+165^{\circ}$ C (ambient + temp rise). Derating. Storage temperature Component:  $-55^{\circ}$ C to  $+165^{\circ}$ C.

Tape and reel packaging: -55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles **Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Packaging** 400/13" reel Plastic tape: 24 mm wide, 0.3 mm thick, 20 mm pocket spacing, 5.2 mm pocket depth

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787\_PCB\_Washing.pdf.

			DCR		SRF		Irms (A) <sup>6</sup>	
Part number <sup>1</sup>	Inductance <sup>2</sup> (µH)	Percent tolerance	typ	hms) <sup>3</sup> max	typ⁴ (MHz)	Isat⁵ (A)	20°C rise	40°C rise
XAL1350-631_E_	0.63	<b>20,</b> 30	1.50	1.70	50	74	28	38
XAL1350-931_E_	0.93	<b>20,</b> 30	2.00	2.20	42	60	25	33
XAL1350-132_E_	1.3	<b>20,</b> 30	2.50	2.70	33	56	23	32
XAL1350-222_E_	2.2	<b>20,</b> 30	4.16	4.80	23	46	19	24
XAL1350-302_E_	3.0	<b>20,</b> 30	5.86	6.80	19	37	16	21

1. When ordering, please specify tolerance and packaging codes:

#### XAL1350-302HED

- Tolerance:  $M=20\%,\,N=30\%$  (Table above shows stock tolerances in bold.)
- **Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape (400 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
- 2. Inductance tested at 1 MHz, 0.1 Vrms, 0 Adc.
- 3. DCR measured on a micro-ohmmeter.
- 4. SRF measured using an Agilent/HP 4395A or equivalent.
- DC current at which the inductance drops 30% (typ) from its value without current.
- 6. Current that causes the specified temperature rise from 25°C ambient.
- 7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Irms	Testing
------	---------

Irms testing was performed on 0.75 inch wide  $\times 0.25$  inch thick copper traces in still air.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.




US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw China +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg


#### Document 1032-1 Revised 04/18/22


© Coilcraft Inc. 2023 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




## Shielded Power Inductors – XAL1350

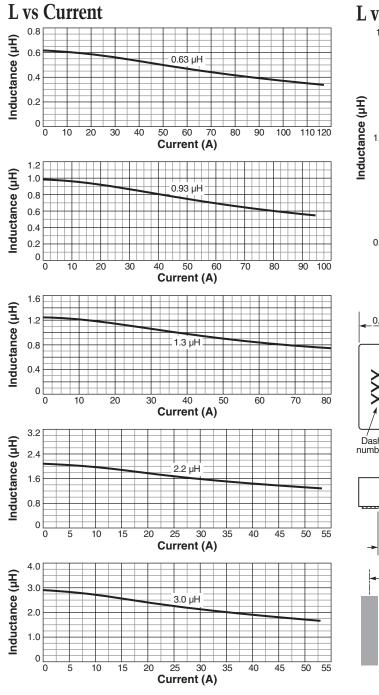

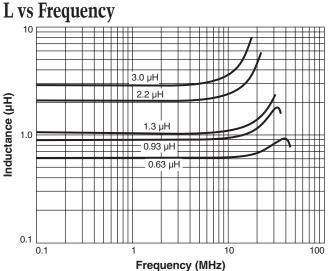






<u>0.472</u> 12,0

0.339 8,6

0.117

2,98 →

Land Pattern



\* For optional tin-lead and tin-silvercopper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.005 inch / 0.13 mm.

Dimensions are in  $\frac{inches}{mm}$ 



 US
 +1-847-639-6400
 sales@coilcraft.com

 UK
 +44-1236-730595
 sales@coilcraft-europe.com

 Taiwan
 +886-2-2264
 3646
 sales@coilcraft.com.tw

 China
 +86-21-6218
 8074
 sales@coilcraft.com.cn

 Singapore
 + 65-6484
 8412
 sales@coilcraft.com.sg

### Document 1032-2 Revised 04/18/22

© Coilcraft Inc. 2023 This product may not be used in medical or high risk applications without pror Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.