

SMT Power Transformer For Analog Devices ADM2482E and ADM2487E RS-485 Transceivers



- Designed specifically for use with Analog Devices ADM2482E and ADM2487E High Speed, Isolated RS-485 Transceivers with Integrated Transformer Driver
- · Center tapped primary and secondary
- · 2500 Vrms primary to secondary isolation

Core material Ferrite

Terminations RoHS compliant tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Ambient temperature -40°C to +125°C

Storage temperature Component: -40°C to +125°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 600 per 13" reel; Plastic tape: 24 mm wide, 0.37 mm thick, 16 mm pocket spacing, 6.1 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787_PCB_Washing.pdf.

	Pri/sec	Inductance ²	DCR max (Ohms)3		Leakage inductance ⁴	Volt-time product⁵	Power ⁶	Turns ratio
Part number ¹	voltage	min (μH)	1/2 pri	1/2 sec	max (µH)	(V-μsec)	(W)	pri : sec
GA3157-AL_	5 V to 3.3 V	45.6	0.130	0.155	1.14	34.4	7.2	1:0.88


1. When ordering, please specify termination and packaging codes:

GA3157-ALD


Termination: L = RoHS compliant tin-silver over tin over nickel over phos bronze. **Special order: T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).

- Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (600 per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
 - **B** = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D.
- 2. Inductance is tested between pins 4 and 3 at 500 kHz, 0.5 Vrms, 0 Adc.
- 3. DCR is for each half of the primary and secondary.
- 4. Leakage inductance is for the primary with both windings connected in series and with the secondary windings shorted.
- 5. Based on Bsat of the core at 25°C and number of turns on winding 4-3.
- 6. Calculated output power based on 150 kHz operating frequency. Power varies depending on application.
- 7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



Primary windings and secondary windings to be connected in series on the PC board.

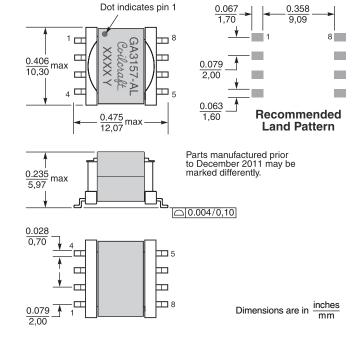



US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw **China** +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg Document 686 Revised 03/10/22

© Coilcraft Inc. 2022

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice.
Please check web site for latest information.