+

V_{OUTAUX}

+

VOUT

+

VOUT


VOUT



Shielded Coupled Inductors MSD1048



- Tight coupling ($k \ge 0.97$)
- 200 V isolation
- Ideal for use in a variety of circuits including flyback, multi-output buck, SEPIC, Ćuk and Zeta.
- · High efficiency and excellent current handling
- Can also be used as two single inductors connected in series or parallel, as a common mode choke or as a 1 : 1 transformer.





L2 000•

•000

Typical Buck Converter with auxiliary output

D

sw

•000

ΤŧΓ

ΓQ

C 7

VIN

L1

Q

00

L1

L1

╢

C1

Typical SEPIC schematic

łŀ

C1

Typical Zeta schematic

L2

▲'D

'n

С

С


D

•000

L2

c:

C >



* For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.012 inch (0,3 mm).

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw China +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1190-1 Revised 04/27/22

© Coilcraft Inc. 2022 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

ended v_{IN} c t httern _ _ _

V_{IN}



Shielded Coupled Inductors – MSD1048 Series

				Coupling	Leakage		Irms (A)	
Part number ¹	Inductance ² (µH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	coefficient typ	Inductance⁵ typ (µH)	Isat ⁶ (A)	both windings ⁷	one winding ⁸
MSD1048-222NE_	2.2±30%	0.019	65	0.97	0.30	9.1	2.4	3.4
MSD1048-103ME_	10±20%	0.053	27	>0.99	0.40	4.3	1.5	2.1
MSD1048-223ME_	22±20%	0.098	17	>0.99	0.45	2.9	1.3	1.9
MSD1048-473ME_	47 ±20%	0.208	12	>0.99	0.50	2.0	1.1	1.6
MSD1048-683ME_	68±20%	0.297	9.0	>0.99	0.55	1.7	1.0	1.4
MSD1048-104ME_	100±20%	0.387	7.3	>0.99	0.80	1.3	0.85	1.2
MSD1048-224KE_	220±10%	0.840	4.8	>0.99	1.0	0.90	0.62	0.87

1. When ordering, please specify termination and packaging codes:

MSD1048-224KED

- Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape. (800 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
 - B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D.
- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- 5. Leakage Inductance is for L1 and is measured with L2 shorted.
- DC current at 25°C that causes a 30% (typ) inductance drop from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. To predict temperature rise go to online calculator.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. To predict temperature rise go to online calculator.
- 9. Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications." Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. Go to online calculator.

Core material Ferrite

Core and winding loss Go to online calculator

Terminations RoHS compliant matte tin over nickel over phos bronze. Other terminations available at additional cost.

Weight: 1.5-1.8 g

Ambient temperature -40° C to $+85^{\circ}$ C with (40° C rise) Irms current. **Maximum part temperature** $+125^{\circ}$ C (ambient + temp rise).

Storage temperature Component: -40° C to $+125^{\circ}$ C. Tape and reel packaging: -40° C to $+80^{\circ}$ C

Winding-to-winding isolation 200 Vrms, one minute Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 800/13" reel Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing, 5.1 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787_PCB_Washing.pdf.




US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw China +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1190-2 Revised 04/27/22

© Coilcraft Inc. 2022 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



Shielded Coupled Inductors – MSD1048 Series

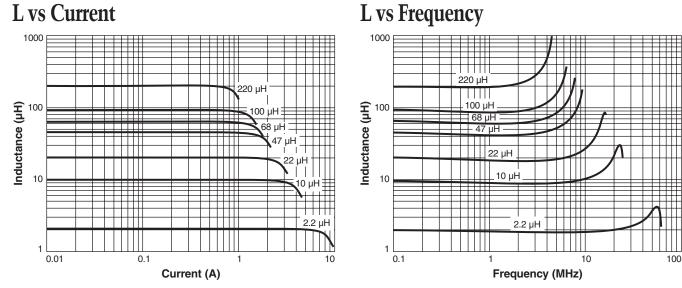



 US
 +1-847-639-6400
 sales@coilcraft.com

 UK
 +44-1236-730595
 sales@coilcraft-europe.com

 Taiwan
 +886-2-2264
 3646
 sales@coilcraft.com.tw

 China
 +86-21-6218
 8074
 sales@coilcraft.com.cn

 Singapore
 + 65-6484
 8412
 sales@coilcraft.com.sg

Document 1190-3 Revised 04/27/22

© Coilcraft Inc. 2022 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.