


NEW!

Flyback Transformer

For Maxim MAX17595
Flyback Controller

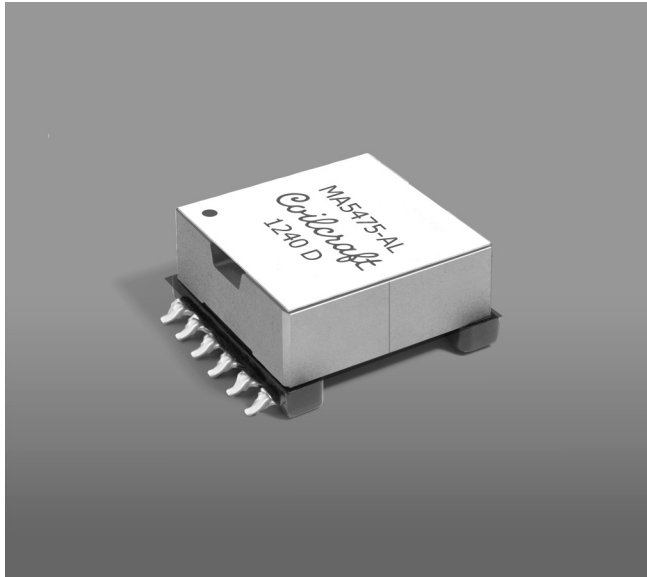

- Mounted on Maxim MAX17595 Evaluation Kit
- Bias winding output: 12 V, 20 mA
- Universal and telecom (36 V – 72 V) input
- 3500 Vrms, one minute primary and bias to secondary isolation

Core material Ferrite

Terminations RoHS tin-silver-copper (96.5/3.0/0.5) over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 21.8 g

Ambient temperature –40°C to +125°C

Storage temperature Component: –40°C to +125°C.

Tray packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332





Packaging 24 parts per tray

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf.

Part number	Inductance at 0 Adc ¹ ±10% (µH)	Inductance at Ipk ² min (µH)	DCR max (Ohms) ³			Leakage Inductance ⁴ max (µH)	Turns ratio		Ipk ² (A)	Output ⁵
			pri	sec	bias		pri : sec	pri : bias		
MA5475-AL	180	162	0.210	0.016	0.185	3.1	1 : 0.24	1 : 0.20	2.0	15 V, 2 A

1. Inductance is for the primary (pins 1–2), measured at 100 kHz, 0.1 Vrms.
2. Peak primary current drawn at minimum input voltage.
3. DCR for the secondary is with the windings connected in parallel.
4. Leakage inductance is for the primary winding with the secondary winding shorted.
5. Output is for the secondary. Bias winding output is 12 V, 20 mA.
6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

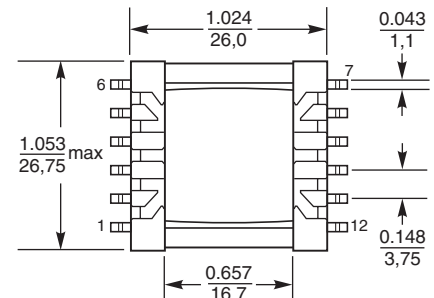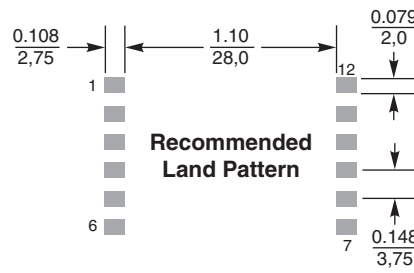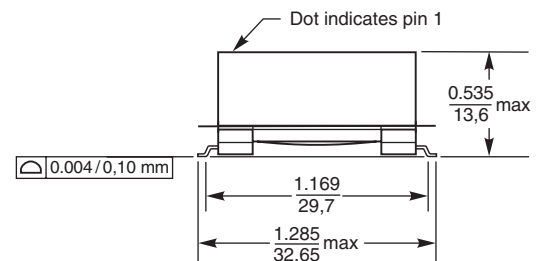

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1076 Revised 03/10/14

© Coilcraft Inc. 2014

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.